



**IQ Mixer Operating From 20 GHz to 31 GHz With
an IF Range From DC to 4.5 GHz And LO Power of
+17 dBm, Field Replaceable 2.92mm**

Mixers Technical Data Sheet

PE86X9005

Features

- I/Q Double Balanced Mixer Module
- IRM or Single Sideband Upconverter Functionality
- RF/LO mm-wave frequency 20 GHz to 31 GHz
- IF Bandwidth DC to 4.5 GHz
- GaAs MESFET MMIC Technology
- High image rejection 28 dB
- High LO/RF Isolation 38 dB
- High input IP3 +25 dBm
- LO drive level +19 dBm
- Hermetically Sealed Module
- Mil Spec Compliant
- Field Replaceable Connectors
- -55°C to +85°C Operating Temperature

Applications

- Electronic Warfare
- Point-to-Point Radios
- Point-to-Multipoint Radios
- VSAT
- Radar
- Space Systems
- Test Instrumentation
- Sensors
- Telecom Infrastructure
- Military End-Use

Description

The PE86X9005 is an I/Q double balanced millimeter-wave mixer module that operates across an RF and LO frequency range from 20 GHz to 31 GHz with an IF frequency range of DC to 4.5 GHz. The design utilizes GaAs MESFET MMIC technology that offers high linearity with reliable and consistent performance. This I/Q mixer design incorporates 2 double balanced mixer cells and a 90° hybrid and can operate as a single sideband upconverter, or an image reject mixer (IRM). For downconversion applications, an external quadrature IF hybrid can be used to select the desired sideband while rejecting image signals. Typical performance is impressive with 24 dB image rejection, 42 dB LO to RF isolation, and +22.5 dBm input IP3. The LO drive level is +17 dBm with typical conversion loss of 10 dB. The drop-in package is hermetically sealed with field replaceable SMA connectors. Operating temperature range is -55°C to +85°C. And for added confidence, this rugged package assembly is designed to meet MIL-STD-883 test conditions for Hermeticity and Temperature Cycle.

Electrical Specifications (TA = +25° C, IF= 100 MHz, LO = +17 dBm)

Description	Minimum	Typical	Maximum	Units
RF Frequency Range	20		31	GHz
LO Frequency Range	20		31	GHz
IF Frequency Range	DC		4.5	GHz
Impedance		50		Ohms
Conversion Loss		10	15	dB
Image Rejection	17	24		dB
LO to RF Isolation	29	42		dB
LO to IF Isolation	15	30		dB
Input at 1dB Compression Point		+17		dBm
Input at 3rd Order Intercept Point		+22.5		dBm
Amplitude Balance		0.3		dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [IQ Mixer Operating From 20 GHz to 31 GHz With an IF Range From DC to 4.5 GHz And LO Power of +17 dBm, Field Replaceable 2.92mm PE86X9005](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



**IQ Mixer Operating From 20 GHz to 31 GHz With
an IF Range From DC to 4.5 GHz And LO Power of
+17 dBm, Field Replaceable 2.92mm**

Mixers Technical Data Sheet

PE86X9005

Phase Balance	4		Degrees
RF Input Power		+13	dBm
LO Input Power	+17	+27	dBm
IF Input Power		+13	dBm

Performance by Frequency

MxN Spurious Outputs

	nLO				
mRF	0	1	2	3	4
0	xx	-13	27	xx	xx
1	18	0	35	52	xx
2	76	74	87	74	82
3	xx	83	87	77	87
4	xx	xx	82	87	87

RF = 24.5 GHz @ -10 dBm
LO = 24.4 GHz @ +17 dBm
Data taken without IF 90° hybrid
All values in dBc with reference to output power at IF= 100 MHz

Electrical Specification Notes:

All measurements performed as downconverter unless otherwise noted.

Mechanical Specifications

Size

Length	0.89 in [22.61 mm]
Width	0.68 in [17.27 mm]
Height	0.36 in [9.14 mm]
Weight	0.084 lbs [38.1 g]

Configuration

Design	IQ
Connector Option	Field Replaceable
RF Connector	2.92mm Female
LO Connector	2.92mm Female
IF Connector	SMA Female

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [IQ Mixer Operating From 20 GHz to 31 GHz With an IF Range From DC to 4.5 GHz And LO Power of +17 dBm, Field Replaceable 2.92mm PE86X9005](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



IQ Mixer Operating From 20 GHz to 31 GHz With
an IF Range From DC to 4.5 GHz And LO Power of
+17 dBm, Field Replaceable 2.92mm

Mixers Technical Data Sheet

PE86X9005

Environmental Specifications

Temperature

Operating Range

-55 to +85 deg C

Storage Range

-65 to +150 deg C

Temperature Cycle

MIL-STD-883, Method 101C, Cond B

Hermetic Seal

Gross Leak MIL-STD-883 Method 1014C1/Fine Leak

MIL-STD-883, Method 1014A2, 5 x 10-8 atm cc

ESD Sensitive

ESD Sensitive Material, Transport material in Approved
ESD bags. Handle only in ESD Workstation.



Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- *Conversion gain data taken with external IF 90° hybrid.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [IQ Mixer Operating From 20 GHz to 31 GHz With an IF Range From DC to 4.5 GHz And LO Power of +17 dBm, Field Replaceable 2.92mm PE86X9005](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.




IQ Mixer Operating From 20 GHz to 31 GHz With
an IF Range From DC to 4.5 GHz And LO Power of
+17 dBm, Field Replaceable 2.92mm

Mixers Technical Data Sheet

PE86X9005

Functional Block Diagram

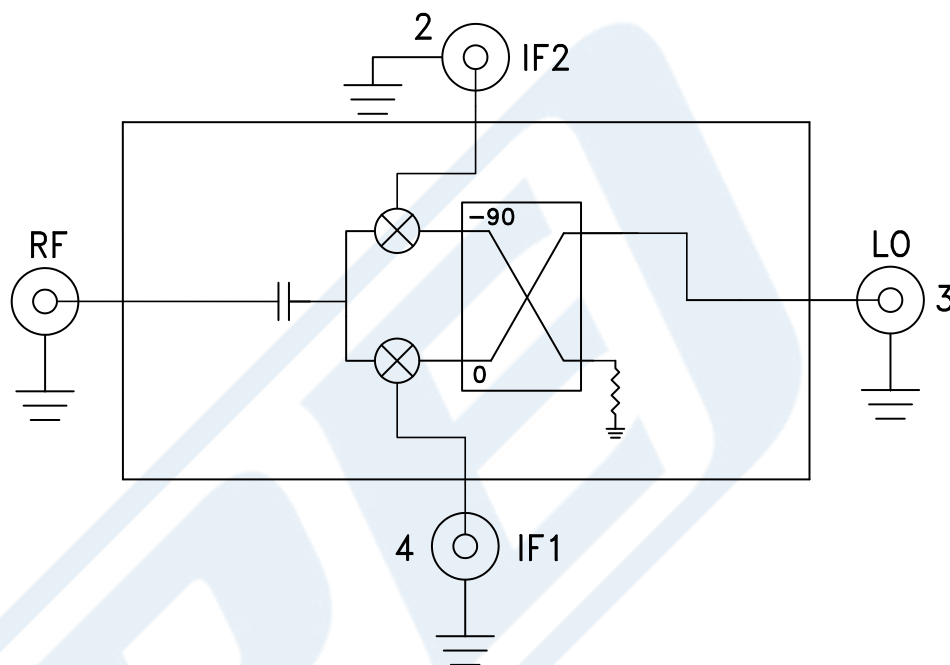

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [IQ Mixer Operating From 20 GHz to 31 GHz With an IF Range From DC to 4.5 GHz And LO Power of +17 dBm, Field Replaceable 2.92mm PE86X9005](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



**IQ Mixer Operating From 20 GHz to 31 GHz With
an IF Range From DC to 4.5 GHz And LO Power of
+17 dBm, Field Replaceable 2.92mm**

Mixers Technical Data Sheet

PE86X9005

Typical Performance Data

Data taken As IRM With External IF 90° Hybrid

Conversion Gain vs. Temperature



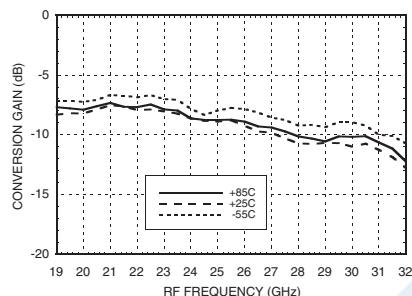



Image Rejection vs. Temperature

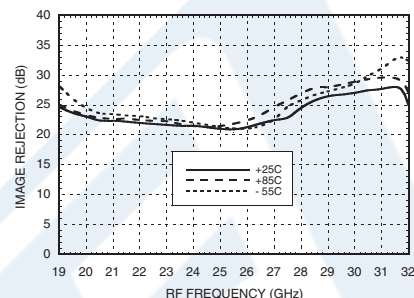


Conversion Gain vs. LO Drive

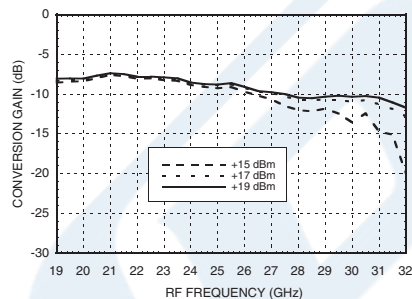


Return Loss

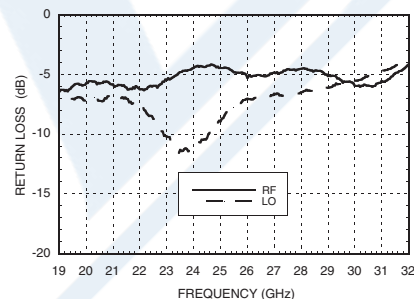

Input P1dB vs. Temperature

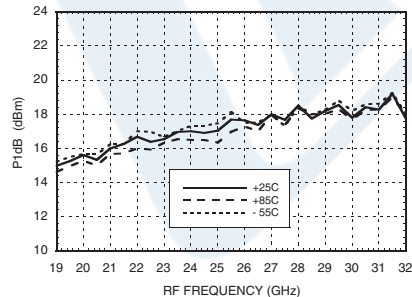

Input IP3 vs. LO Drive

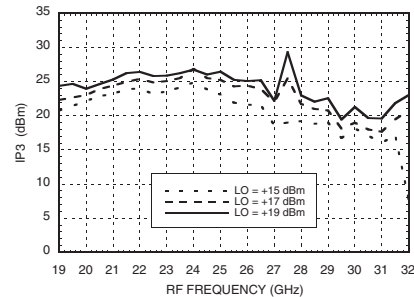

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [IQ Mixer Operating From 20 GHz to 31 GHz With an IF Range From DC to 4.5 GHz And LO Power of +17 dBm, Field Replaceable 2.92mm PE86X9005](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.




**IQ Mixer Operating From 20 GHz to 31 GHz With
an IF Range From DC to 4.5 GHz And LO Power of
+17 dBm, Field Replaceable 2.92mm**

Mixers Technical Data Sheet


PE86X9005

IF1 & IF2 Port Characteristics


Isolation, LO=+10dBm

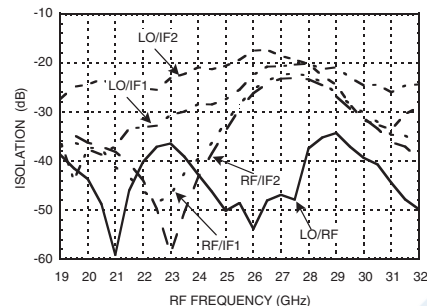


IF Bandwidth*

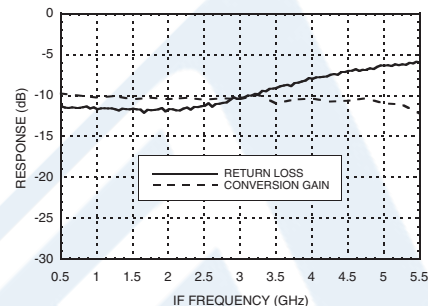


Amplitude Balance vs. LO Drive

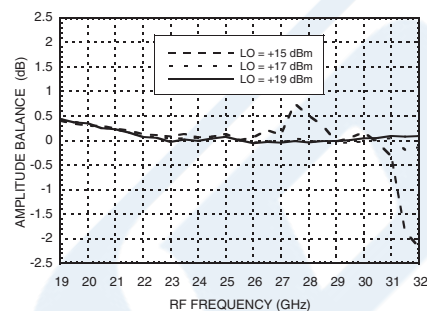


Phase Balance vs. LO Drive

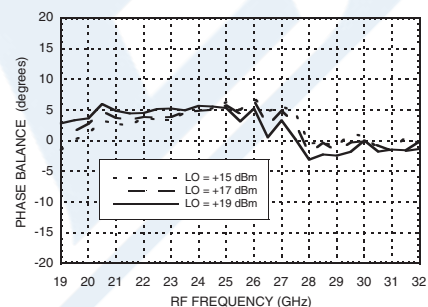

Upconverter Performance Conversion Gain vs. LO Drive

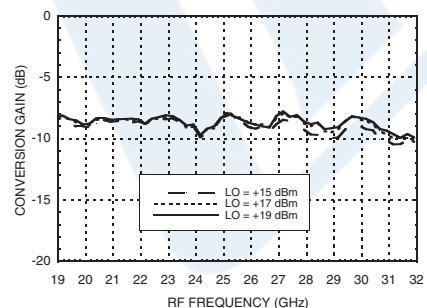

Upconverter Performance Sideband Rejection vs. LO Drive

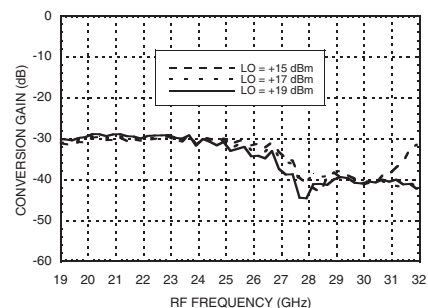

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [IQ Mixer Operating From 20 GHz to 31 GHz With an IF Range From DC to 4.5 GHz And LO Power of +17 dBm, Field Replaceable 2.92mm PE86X9005](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



**IQ Mixer Operating From 20 GHz to 31 GHz With
an IF Range From DC to 4.5 GHz And LO Power of
+17 dBm, Field Replaceable 2.92mm**

Mixers Technical Data Sheet

PE86X9005

IQ Mixer Operating From 20 GHz to 31 GHz With an IF Range From DC to 4.5 GHz And LO Power of +17 dBm, Field Replaceable 2.92mm from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [IQ Mixer Operating From 20 GHz to 31 GHz With an IF Range From DC to 4.5 GHz And LO Power of +17 dBm, Field Replaceable 2.92mm PE86X9005](https://www.pasternack.com/50-ohm-2.92mm-mixer-20-31-ghz-if-dc-4.5-ghz-pe86x9005-p.aspx)


URL: <https://www.pasternack.com/50-ohm-2.92mm-mixer-20-31-ghz-if-dc-4.5-ghz-pe86x9005-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE86X9005 CAD Drawing

IQ Mixer Operating From 20 GHz to 31 GHz With an IF Range From DC to 4.5 GHz And LO Power of +17 dBm, Field Replaceable 2.92mm

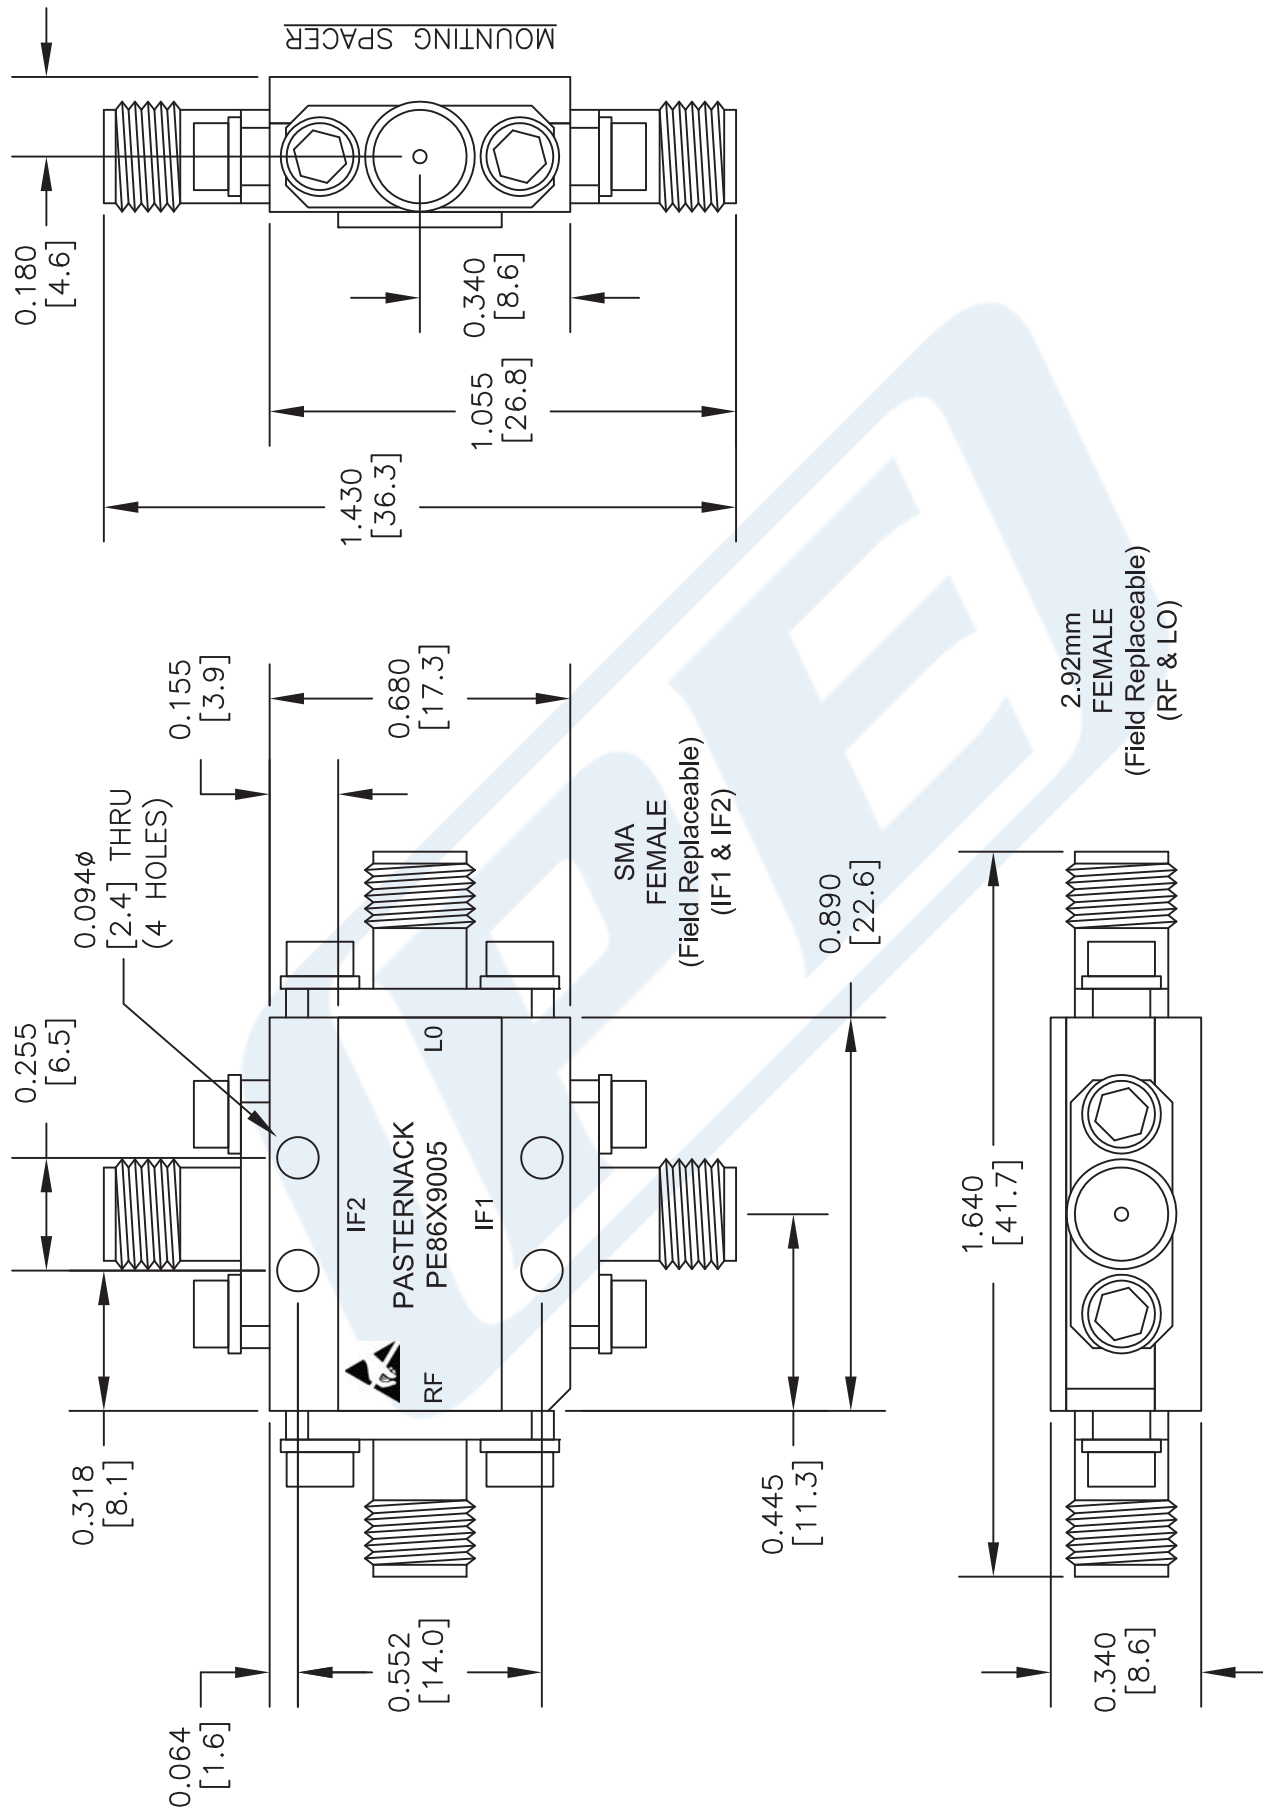

DWG TITLE

PE86X9005

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

PE PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 092916

SCALE N/A

SIZE A

2233