



WR-28 UG-599/U Square Cover Flange to 2.92mm Female Waveguide to Coax Adapter Operating from 26.5 GHz to 40 GHz

Waveguide to Coax Adapters Technical Data Sheet

PEWCA1000

Features

- Ka Band
- 26.5 to 40 GHz Frequency Range
- WR-28 Waveguide Interface
- UG-599/U Square Cover Flange
- 2.92mm Female RF Interface

Applications

- Test Benches
- Radar
- Satellite
- Microwave Radio Systems
- Military and Space
- Communication Systems

Description

The PEWCA1000 is a waveguide to coaxial adapter operating in the Ka Band with a 26.5 to 40 GHz frequency range. This adapter offers a WR-28 waveguide interface size using a standard Square Cover Flange. The PEWCA1000 is constructed of Copper Alloy and painted to ensure durability. The coaxial connector offered by this adapter uses a 2.92mm Female Nickel Plated Brass Connector.

Configuration

Waveguide Size	WR-28
Flange	UG-599/U Square Cover
RF Connector	2.92mm Female
Impedance	50 Ohms
Body Geometry	Right Angle

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	26.5		40	GHz
VSWR		1.3:1		

Mechanical Specifications

Weight	0.06 lbs [27.22 g]
RF Connector	
Connector Type	2.92mm Female
Body Material and Plating	Brass, Nickel
Waveguide Interface	
Waveguide Type	WR-28
Flange Type	Square Cover
Flange Designation	UG-599/U
Body Material and Plating	Copper Alloy, Paint

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-28 UG-599/U Square Cover Flange to 2.92mm Female Waveguide to Coax Adapter Operating from 26.5 GHz to 40 GHz PEWCA1000](#)



WR-28 UG-599/U Square Cover Flange to 2.92mm Female Waveguide to Coax Adapter Operating from 26.5 GHz to 40 GHz

Waveguide to Coax Adapters Technical Data Sheet

PEWCA1000


Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level unless stated otherwise

Typical Performance Data

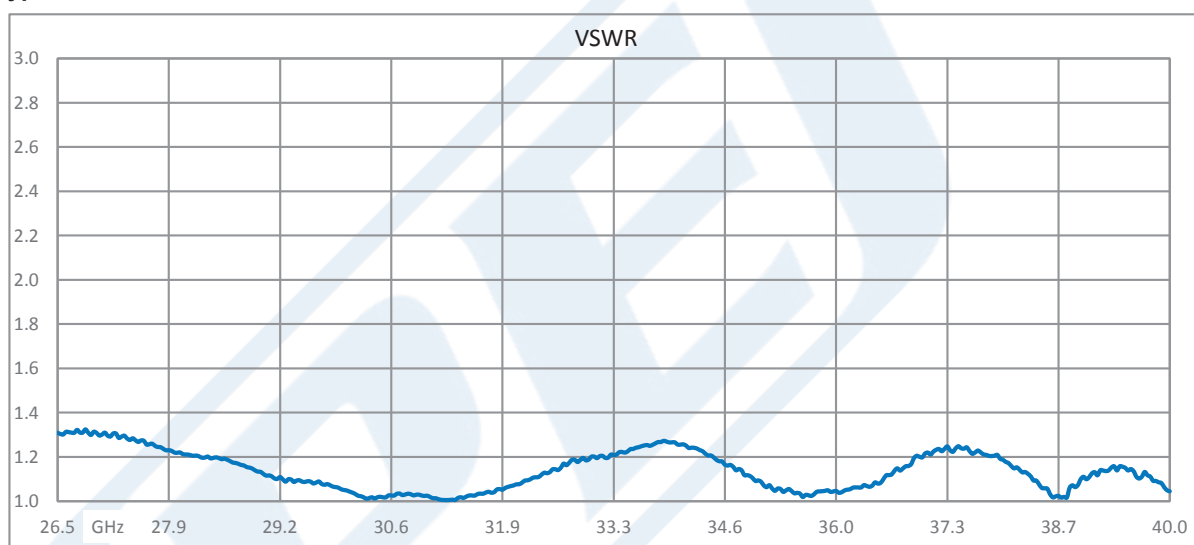

WR-28 UG-599/U Square Cover Flange to 2.92mm Female Waveguide to Coax Adapter Operating from 26.5 GHz to 40 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-28 UG-599/U Square Cover Flange to 2.92mm Female Waveguide to Coax Adapter Operating from 26.5 GHz to 40 GHz PEWCA1000](#)

URL: <https://www.pasternack.com/wr-28-ug599-square-2.92mm-female-waveguide-coax-adapter-40-ghz-pewca1000-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEWCA1000 CAD Drawing

WR-28 UG-599/U Square Cover Flange to 2.92mm Female Waveguide
to Coax Adapter Operating from 26.5 GHz to 40 GHz

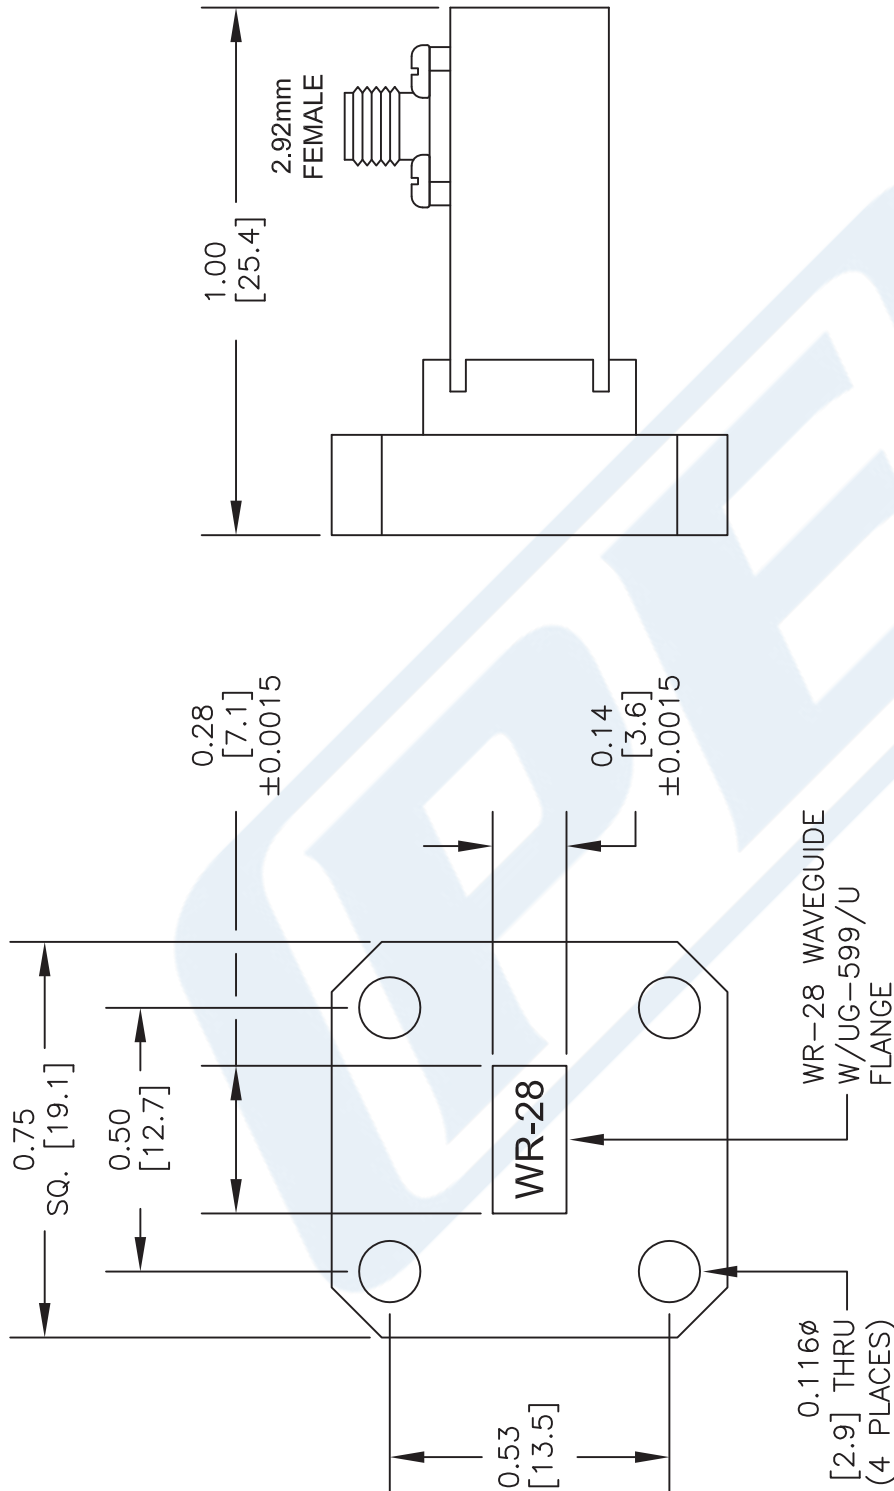

DWG TITLE

PEWCA1000

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 092016

SCALE N/A

SIZE A

2233

PE PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com