



Directional 30 dB SMA Coupler From 800 MHz to 2.5 GHz Rated To 50 Watts

TECHNICAL DATA SHEET

PE2238-30

Directional 30 dB SMA Coupler From 800 MHz to 2.5 GHz Rated To 50 Watts

Configuration

Connector 1	SMA Female
Connector 2	SMA Female
Connector 3	SMA Female
Design	Directional Coupler

Electrical Specifications

Frequency Range, GHz	0.8 to 2.5
Directivity, dB	20
Impedance, Ohms	50
Maximum Insertion Loss, dB	0.4
Maximum Input Power, Watts	50
Maximum Input VSWR	1.25:1
Coupling Value, dB	30
Coupling Tolerance, dB	± 1
Frequency Sensitivity, dB	0.7

Mechanical Specifications

Temperature

Operating Range, deg C	-55 to +85
------------------------	------------

Size

Length, in [mm]	5.99 [152.15]
Width, in [mm]	0.435 [11.05]
Height, in [mm]	0.965 [24.51]

Connector 1

Type	SMA Female
------	------------

Connector 2

Type	SMA Female
------	------------

Connector 3

Type	SMA Female
------	------------

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes
----------------	-----

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 30 dB SMA Coupler From 800 MHz to 2.5 GHz Rated To 50 Watts PE2238-30](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



Directional 30 dB SMA Coupler From 800 MHz
to 2.5 GHz Rated To 50 Watts

TECHNICAL DATA SHEET

PE2238-30

Plotted and Other Data

Notes:

Values at 25 °C, sea level

Directional 30 dB SMA Coupler From 800 MHz to 2.5 GHz Rated To 50 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Directional 30 dB SMA Coupler From 800 MHz to 2.5 GHz Rated To 50 Watts PE2238-30](http://www.pasternack.com/directional-30-db-sma-coupler-0.8-2.5-ghz-50-watts-pe2238-30-p.aspx)

URL: <http://www.pasternack.com/directional-30-db-sma-coupler-0.8-2.5-ghz-50-watts-pe2238-30-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE2238-30 CAD Drawing

Directional 30 dB SMA Coupler From 800 MHz to 2.5 GHz Rated To 50 Watts

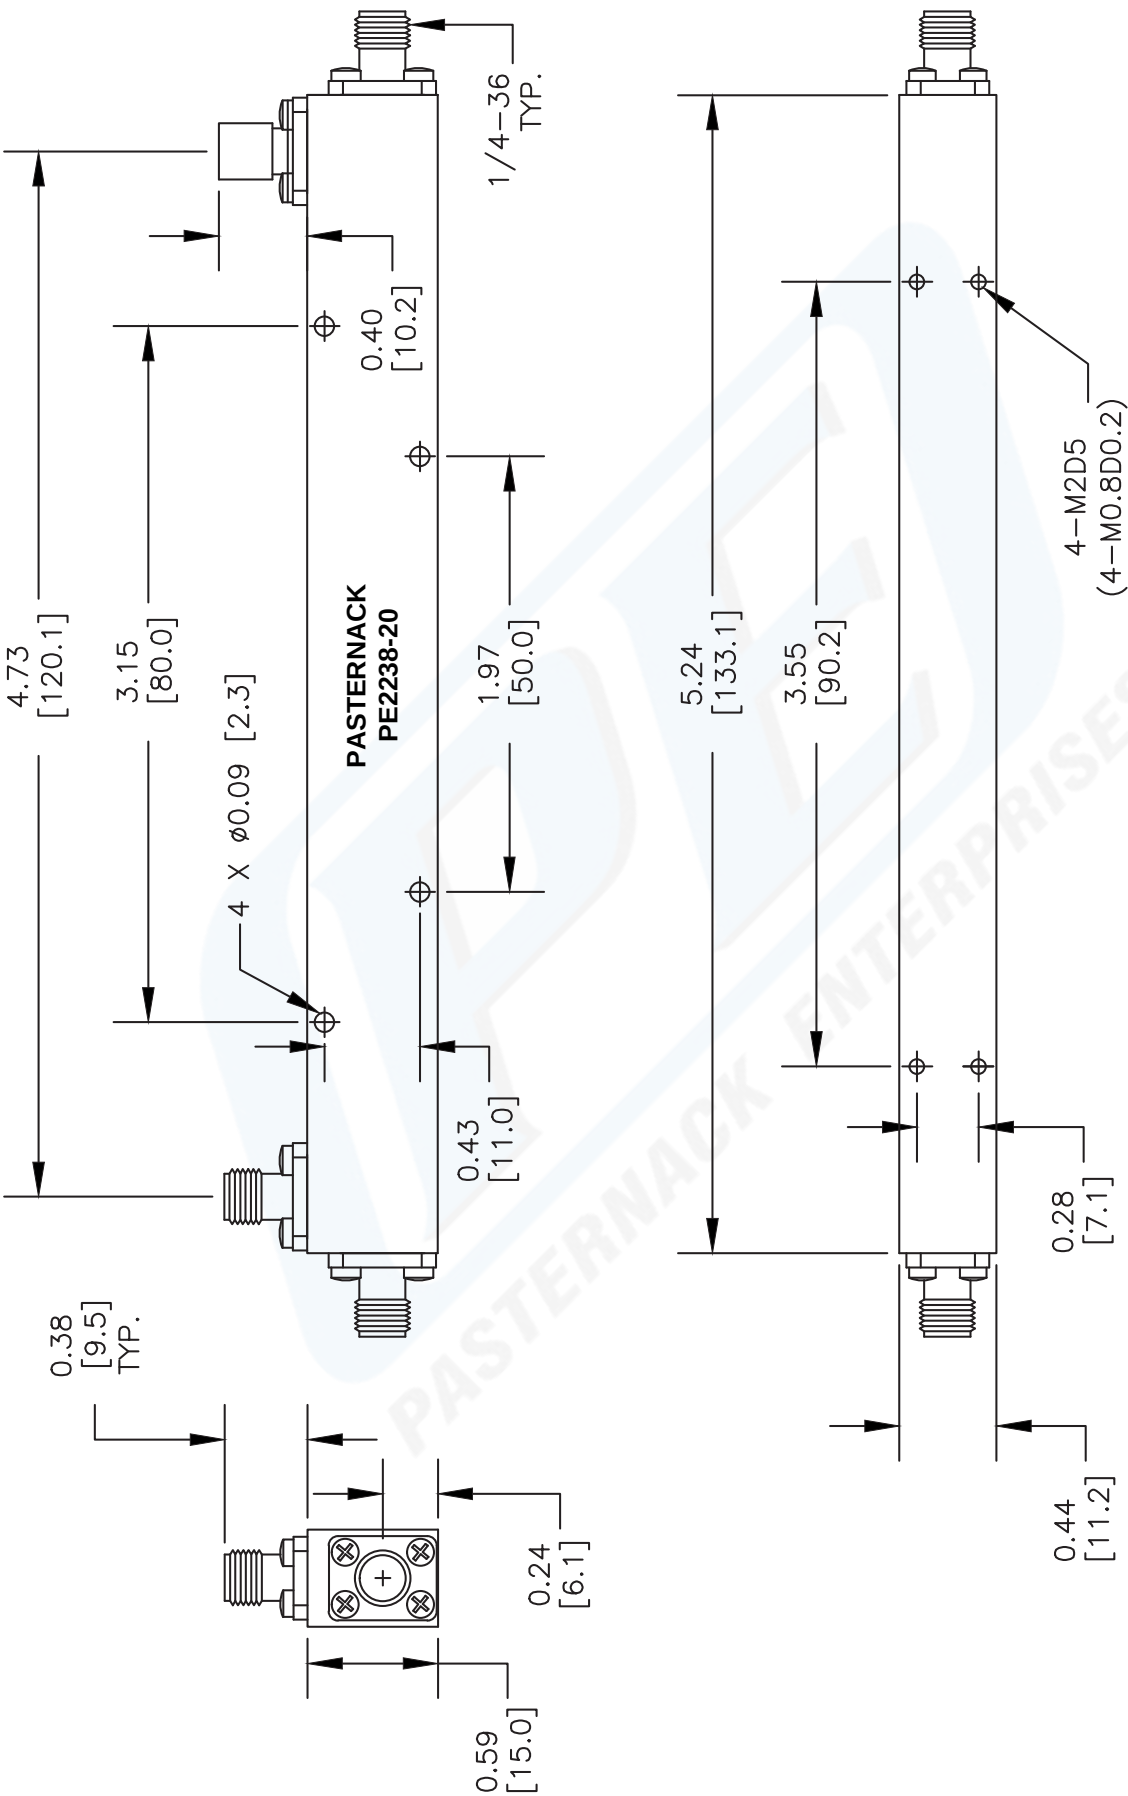

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	PE2238-30			
	FSCM NO.	53919	CAD FILE	XXXXXX
SCALE			N/A	SIZE A
				127



PASTERNAK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919