



SMA Male to BNC Male Cable 36 Inch Length
Using RG188 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C2035LF-36

Configuration

- Connector 1: SMA Male
- Connector 2: BNC Male
- Cable Type: RG188

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	0.35	0.58				dB
Insertion Loss (Typ.)	0.35	0.575				dB
VSWR (Max.)	1.4:1	1.4:1	1.4:1	1.4:1	1.4:1	
Return Loss (Max.)	15.56	15.563	15.563	15.563	15.563	dB

Mechanical Specifications

Cable Assembly

Length*	36 in [914.4 mm]
Diameter	0.57 in [14.48 mm]

Cable

Cable Type	RG188
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Cable 36 Inch Length Using RG188 Coax, LF Solder, RoHS PE3C2035LF-36](#)



SMA Male to BNC Male Cable 36 Inch Length
Using RG188 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C2035LF-36

Jacket Material PTFE, White
Jacket Diameter 0.11 in [2.79 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	BNC Male
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	50µ in. minimum
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100µ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Plating Specification	100 µin minimum	100µ in. minimum
Hex Size	5/16 inch	
Torque	3 in-lbs [0.34 Nm]	

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Cable 36 Inch Length Using RG188 Coax, LF Solder, RoHS PE3C2035LF-36](#)



SMA Male to BNC Male Cable 36 Inch Length Using RG188 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C2035LF-36

How to Order

Part Number Configuration:

PE3C2035LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C2035LF-12 = 12 inches long cable
PE3C2035LF-100cm = 100 cm long cable

SMA Male to BNC Male Cable 36 Inch Length Using RG188 Coax, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to BNC Male Cable 36 Inch Length Using RG188 Coax, LF Solder, RoHS PE3C2035LF-36](https://www.pasternack.com/sma-male-bnc-male-rg188au-cable-assembly-pe3c2035lf-36-p.aspx)

URL: <https://www.pasternack.com/sma-male-bnc-male-rg188au-cable-assembly-pe3c2035lf-36-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C2035LF-36 CAD Drawing

SMA Male to BNC Male Cable 36 Inch Length Using RG188 Coax, LF Solder, RoHS

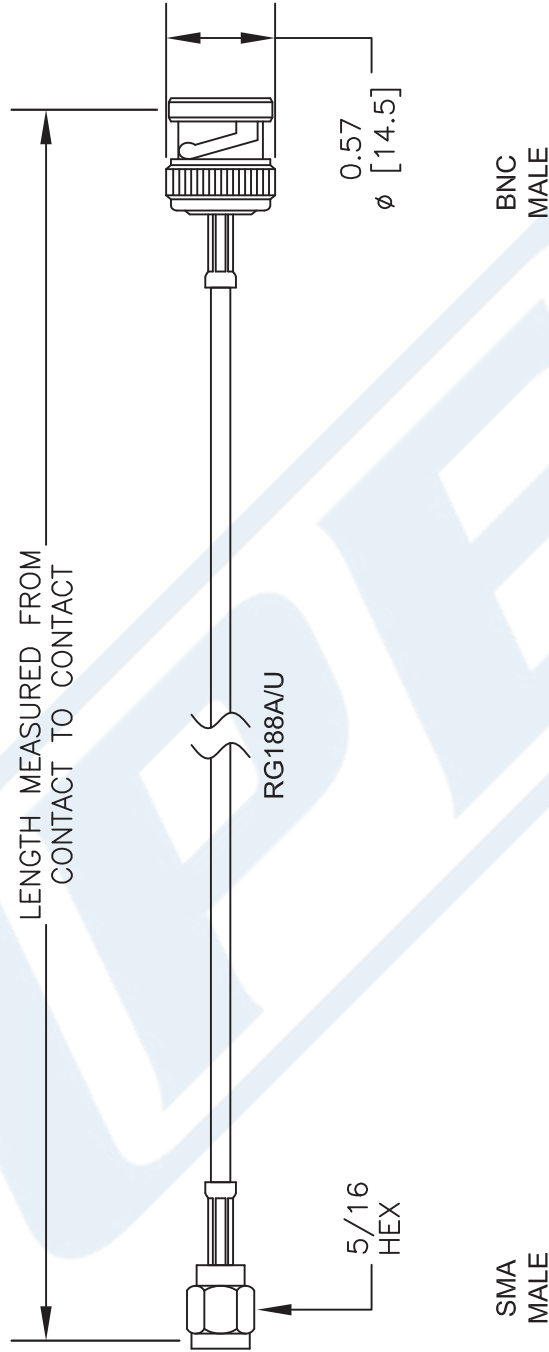

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

DWG TITLE

PE3C2035LF

FSCM NO. 53919

CAD FILE

102116

SCALE N/A

SIZE A

2233

[PE] PASTERNACK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com