



Semirigid Coax Cable 0.118 Diameter With Copper Outer Conductor

RF Cables Technical Data Sheet

PE-118SR-BULK

Configuration

- Semi-Rigid Cable
- 1 Shield(s)

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		46	GHz
Impedance		50		Ohms
Operating Voltage (AC)			3,000	Vrms

Performance by Frequency Band

Description	F1	F2	F3	F4	F5	Units
Frequency	1	10	20			GHz
Attenuation, Typ	12.5	42.5	62.5			dB/100ft
	41.01	139.44	205.05			dB/100m
Input Power (CW), Max	500	144	96			Watts

Mechanical Specifications

Min. Bend Radius (Installation) 0.4 in [10.16 mm]

Construction Specifications

Description	Material and Plating	Diameter
Inner Conductor	Copper, Silver, 1 Strand	0.032 in [0.81 mm]
Conductor Type	Solid	
Dielectric	PTFE (LD)	0.097 in [2.46 mm]
First Shield	Copper	[]
Jacket	Tan	[]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Semirigid Coax Cable 0.118 Diameter With Copper Outer Conductor PE-118SR-BULK](#)



Semirigid Coax Cable 0.118 Diameter With Copper Outer Conductor

RF Cables Technical Data Sheet

PE-118SR-BULK

Environmental Specifications

Temperature

Operating Range

-55 to +200 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Semirigid Coax Cable 0.118 Diameter With Copper Outer Conductor from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Semirigid Coax Cable 0.118 Diameter With Copper Outer Conductor PE-118SR-BULK](#)

URL: <https://www.pasternack.com/semirigid-0.118-50-ohm-coax-cable-copper-pe-118sr-bulk-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Semirigid Coax Cable 0.118 Diameter With Copper Outer Conductor

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/01/2022	AGANWANI

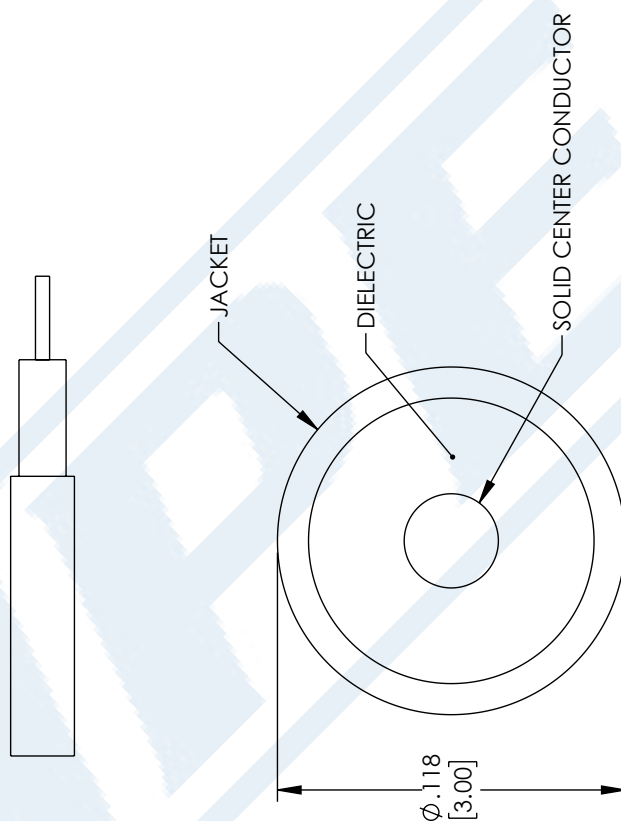

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

.X = ±.2	[.508]	FRACTIONS
.XX = ±.02	[.51]	± 1/32
.XXX = ±.005	[.13]	ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

THIRD-ANGLE PROJECTION

THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET 1 OF 1

N/A
SCALE

REV	
-----	--

PE PASTERNAK
an INFINITE® brand

Pasternack Enterprises, Inc.
P.O.Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376

Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

E CODE	DRAWN BY	ITEM NO.
--------	----------	----------

PE-118SR-BULK

DZINN

53919

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.