



SMA Male Right Angle to BNC Male Cable 6 Inch  
Length Using RG316 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3350LF-6

**Configuration**

- Connector 1: SMA Male Right Angle
- Connector 2: BNC Male
- Cable Type: RG316

**Electrical Specifications**

| Description                   | Minimum | Typical      | Maximum | Units           |
|-------------------------------|---------|--------------|---------|-----------------|
| Frequency Range               | DC      |              | 3       | GHz             |
| VSWR                          |         |              | 1.4:1   |                 |
| Velocity of Propagation       |         | 69           |         | %               |
| Capacitance                   |         | 29.4 [96.46] |         | pF/ft [pF/m]    |
| DC Resistance Inner Conductor |         | 8.41 [27.59] |         | Ω/1000ft [Ω/Km] |
| Operating Voltage (AC)        |         |              | 335     | Vrms            |
| Jacket Spark                  |         |              | 2,000   | Vrms            |

**Specifications by Frequency**

| Description           | F1    | F2     | F3     | F4     | F5     | Units |
|-----------------------|-------|--------|--------|--------|--------|-------|
| Frequency             | 0.1   | 0.25   | 0.5    | 1      | 3      | GHz   |
| Insertion Loss (Max.) | 0.26  | 0.27   | 0.3    | 0.35   | 0.47   | dB    |
| Insertion Loss (Typ.) | 0.255 | 0.28   | 0.319  | 0.39   | 0.49   | dB    |
| VSWR (Max.)           | 1.4:1 | 1.4:1  | 1.4:1  | 1.4:1  | 1.4:1  |       |
| Return Loss (Max.)    | 15.56 | 15.563 | 15.563 | 15.563 | 15.563 | dB    |

**Mechanical Specifications**

**Cable Assembly**

Length\* 6 in [152.4 mm]  
Diameter 0.57 in [14.48 mm]

**Cable**

Cable Type RG316  
Impedance 50 Ohms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to BNC Male Cable 6 Inch Length Using RG316 Coax, LF Solder, RoHS PE3C3350LF-6](#)



SMA Male Right Angle to BNC Male Cable 6 Inch  
Length Using RG316 Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C3350LF-6

|                                      |                            |
|--------------------------------------|----------------------------|
| Inner Conductor Type                 | Stranded                   |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver  |
| Dielectric Type                      | PTFE                       |
| Number of Shields                    | 1                          |
| Shield Layer 1                       | Silver Plated Copper Braid |
| Jacket Material                      | FEP, Tan                   |
| Jacket Diameter                      | 0.102 in [2.59 mm]         |

**Connectors**

| Description                        | Connector 1          | Connector 2      |
|------------------------------------|----------------------|------------------|
| Type                               | SMA Male Right Angle | BNC Male         |
| Specification                      | MIL-STD-348A         | MIL-STD-348A     |
| Impedance                          | 50 Ohms              | 50 Ohms          |
| Contact Material and Plating       | Brass, Gold          | Brass, Gold      |
| Contact Plating Specification      | 50 µin minimum       | 50µ in. minimum  |
| Dielectric Type                    | PTFE                 | Teflon           |
| Body Material and Plating          | Brass, Nickel        | Brass, Nickel    |
| Body Plating Specification         | 100 µin minimum      | 100µ in. minimum |
| Coupling Nut Material and Plating  | Brass, Nickel        | Brass, Nickel    |
| Coupling Nut Plating Specification | 100 µin minimum      | 100µ in. minimum |
| Hex Size                           | 5/16 inch            |                  |
| Torque                             | 3 in-lbs [0.34 Nm]   |                  |

**Mechanical Specification Notes:**

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8$ ", whichever is greater.

**Environmental Specifications**

**Temperature**

Operating Range -55 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

**Notes:**

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to BNC Male Cable 6 Inch Length Using RG316 Coax, LF Solder, RoHS PE3C3350LF-6](#)



## SMA Male Right Angle to BNC Male Cable 6 Inch Length Using RG316 Coax, LF Solder, RoHS

### RF Cable Assemblies Technical Data Sheet

PE3C3350LF-6

#### How to Order

Part Number Configuration:

**PE3C3350LF**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C3350LF-12 = 12 inches long cable  
PE3C3350LF-100cm = 100 cm long cable

SMA Male Right Angle to BNC Male Cable 6 Inch Length Using RG316 Coax, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to BNC Male Cable 6 Inch Length Using RG316 Coax, LF Solder, RoHS PE3C3350LF-6](https://www.pasternack.com/sma-male-bnc-male-rg316u-cable-assembly-pe3c3350lf-6-p.aspx)

URL: <https://www.pasternack.com/sma-male-bnc-male-rg316u-cable-assembly-pe3c3350lf-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C3350LF-6 CAD Drawing

SMA Male Right Angle to BNC Male Cable 6 Inch Length  
Using RG316 Coax, LF Solder, RoHS

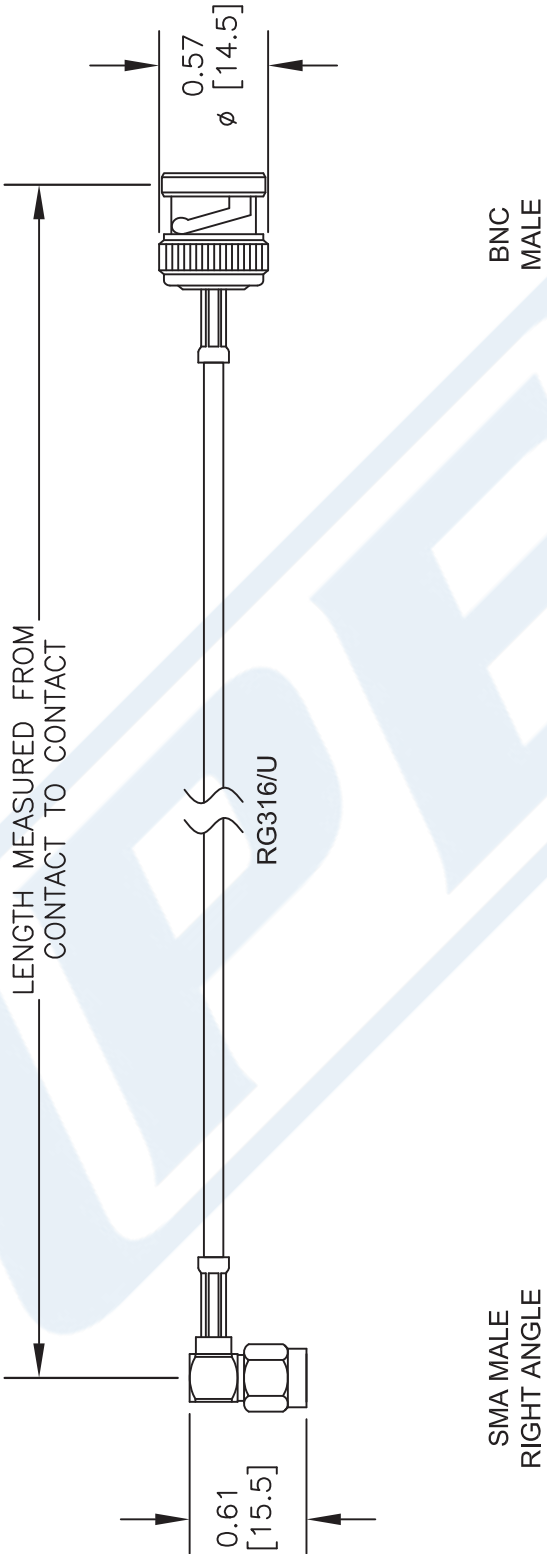

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

DWG TITLE  
**PE3C3350LF**

FSCM NO. 53919

CAD FILE 101816

SCALE N/A

SIZE A

2233

**PE PASTERNAK®**  
THE ENGINEER'S RF SOURCE  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)