

SMA Male to TNC Female Bulkhead Low Loss  
Cable 50 CM Length Using PE-P160LL Coax



**RF Cable Assemblies Technical Data Sheet**


**PE3C5260-50CM**

**Configuration**

- Connector 1: SMA Male
- Connector 2: TNC Female Bulkhead
- Cable Type: PE-P160LL

**Features**

- Max Frequency 18 GHz
- Shielding Effectivity > 90 dB
- 82.5% Phase Velocity
- Triple Shielded
- FEP Jacket
- 0.8 inch Minimum Bend Radius
- Max VSWR of 1.35:1 to 18 GHz
- Same Day Shipment of Custom Lengths
- RoHS and REACH Compliant

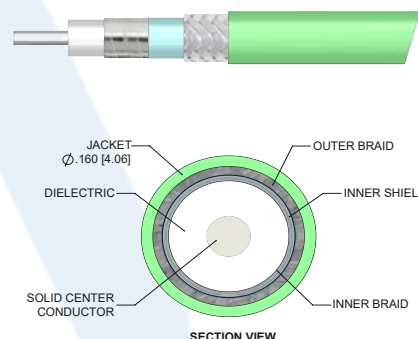

**Applications**

- General Purpose
- Laboratory Use
- Automated Test Systems
- Airborne Systems
- Phased Arrays
- EW and Countermeasures

**Description**

The PE3C5260-50CM SMA Male to TNC Female Bulkhead Low Loss cable assembly is part of a series of cable assemblies that use our PE-P160LL double shielded coax. The PE-P160LL based cable assemblies are available in a variety of connector configurations operating to a maximum frequency for this cable series of 18 GHz. The PE3C5260-50CM high performance cable assembly with a 82.5% phase velocity offers very low loss performance in a 0.16 inch coax up to 18 GHz. The shielding effectiveness of the PE-P160LL double shielded coax is greater than 95 dB. The durable stainless steel connectors and FEP cable jacket provide a cost effective design ideal for test environments where a rugged cable assembly is required. A heavy duty heat shrink booting provides improved strain relief and adds to the durability of the cable assembly.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Female Bulkhead Low Loss Cable 50 CM Length Using PE-P160LL Coax PE3C5260-50CM](#)



SMA Male to TNC Female Bulkhead Low Loss  
Cable 50 CM Length Using PE-P160LL Coax

**RF Cable Assemblies Technical Data Sheet**

**PE3C5260-50CM**

**Electrical Specifications**

| Description             | Minimum | Typical    | Maximum | Units        |
|-------------------------|---------|------------|---------|--------------|
| Frequency Range         | DC      |            | 18      | GHz          |
| VSWR                    |         |            | 1.35:1  |              |
| Velocity of Propagation |         | 82.5       |         | %            |
| RF Shielding            | 90      |            |         | dB           |
| Capacitance             |         | 25 [82.02] |         | pF/ft [pF/m] |

**Specifications by Frequency**

| Description           | F1   | F2   | F3   | F4   | F5   | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency             | 1    | 2    | 4.5  | 9    | 18   | GHz   |
| Insertion Loss (Typ.) | 0.24 | 0.35 | 0.53 | 0.76 | 1.09 | dB    |

**Electrical Specification Notes:**

The Insertion Loss data above is based on the performance specifications of the coax cable used in this assembly. The Insertion Loss includes an estimated insertion loss of  $0.04 \times \sqrt{F(\text{GHz})}$  dB maximum per connector.

**Mechanical Specifications**

**Cable Assembly**

Length\* 19.69 in [500.13 mm]

**Cable**

Cable Type PE-P160LL  
 Impedance 50 Ohms  
 Inner Conductor Type Solid  
 Inner Conductor Material and Plating Copper, Silver  
 Dielectric Type Expanded PTFE Tape  
 Number of Shields 3  
 Shield Layer 1 Silver Plated Copper  
 Shield Layer 2 Aluminum Polyester  
 Shield Layer 3 Silver Plated Copper  
 Jacket Material FEP  
 Jacket Diameter 0.16 in [4.06 mm]

Repeated Minimum Bend Radius 0.8 in [20.32 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Female Bulkhead Low Loss Cable 50 CM Length Using PE-P160LL Coax PE3C5260-50CM](#)



SMA Male to TNC Female Bulkhead Low Loss  
Cable 50 CM Length Using PE-P160LL Coax

**RF Cable Assemblies Technical Data Sheet**

**PE3C5260-50CM**

**Connectors**

| Description                          | Connector 1                | Connector 2                |
|--------------------------------------|----------------------------|----------------------------|
| Type                                 | SMA Male                   | TNC Female Bulkhead        |
| Impedance                            | 50 Ohms                    | 50 Ohms                    |
| Contact Material and Plating         | Beryllium Copper, Gold     | Beryllium Copper, Gold     |
| Contact Plating Specification        | ASTM-B488                  | ASTM-B488                  |
| Dielectric Type                      | PTFE                       | PTFE                       |
| Outer Conductor Material and Plating |                            | Passivated Stainless Steel |
| Body Material and Plating            | Passivated Stainless Steel | Passivated Stainless Steel |
| Coupling Nut Material and Plating    | Passivated Stainless Steel |                            |

**Environmental Specifications**

**Temperature**

Operating Range


-55 to +165 deg C

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

**Typical Performance Data**

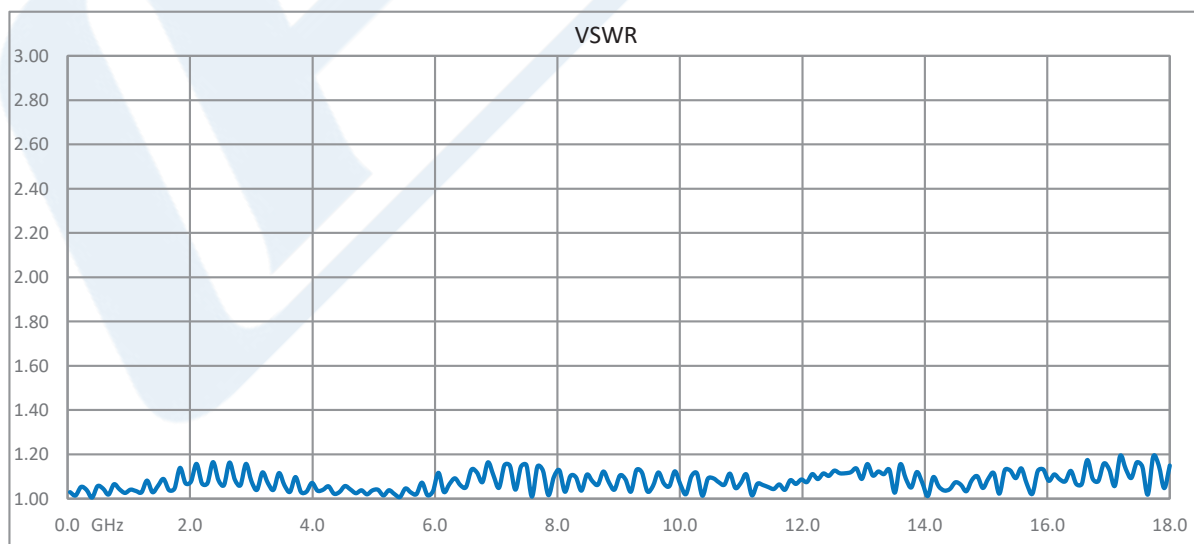


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Female Bulkhead Low Loss Cable 50 CM Length Using PE-P160LL Coax PE3C5260-50CM](#)



SMA Male to TNC Female Bulkhead Low Loss  
Cable 50 CM Length Using PE-P160LL Coax

## RF Cable Assemblies Technical Data Sheet

**PE3C5260-50CM**

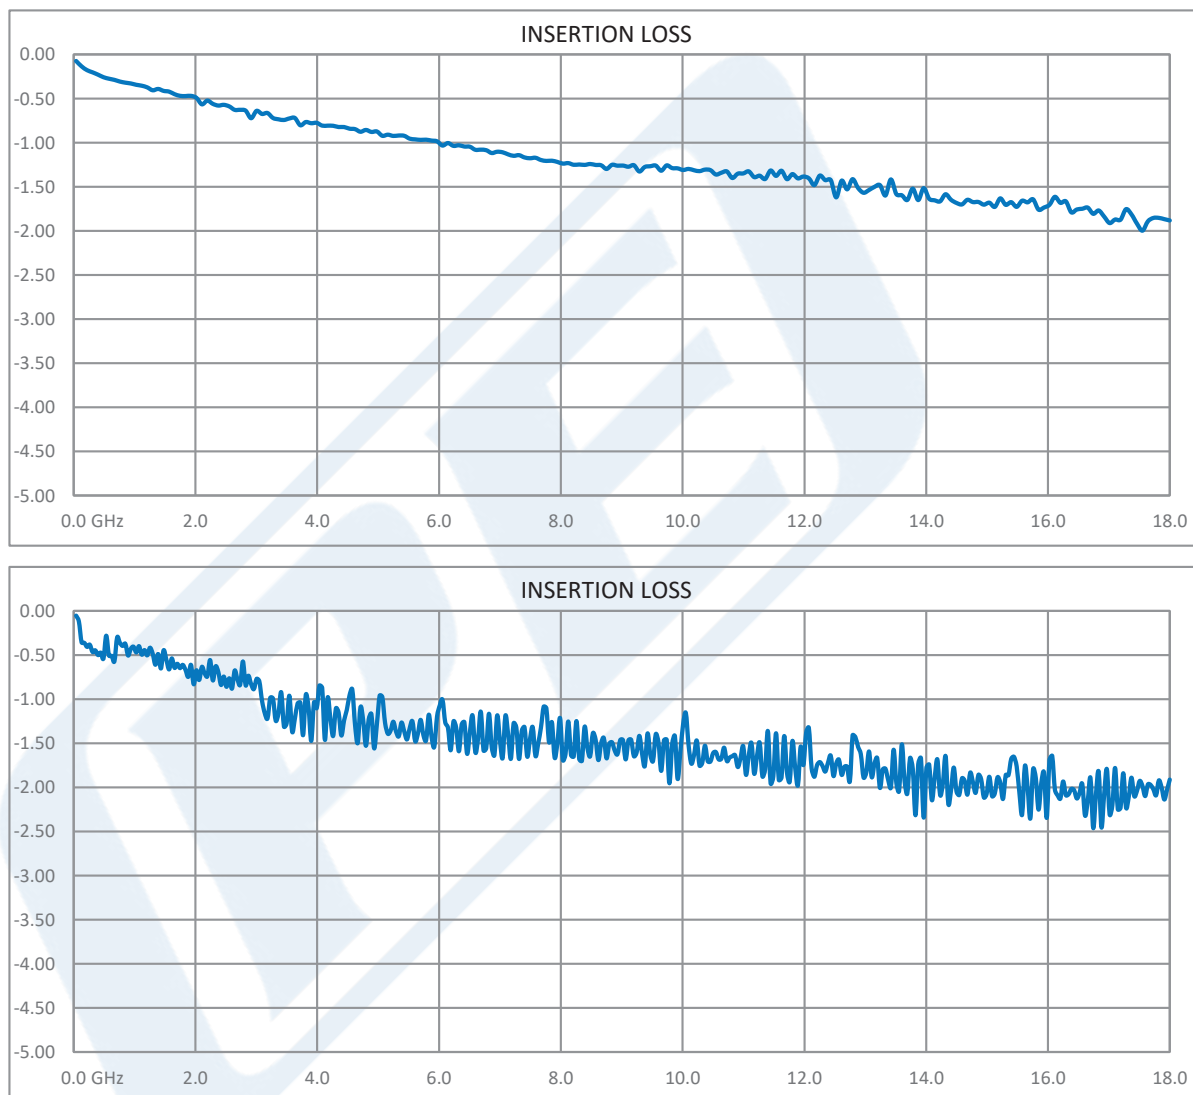

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Female Bulkhead Low Loss Cable 50 CM Length Using PE-P160LL Coax PE3C5260-50CM](#)



## SMA Male to TNC Female Bulkhead Low Loss Cable 50 CM Length Using PE-P160LL Coax

### RF Cable Assemblies Technical Data Sheet

**PE3C5260-50CM**

#### How to Order

Part Number Configuration:

**PE3C5260**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C5260-12 = 12 inches long cable  
PE3C5260-100cm = 100 cm long cable

SMA Male to TNC Female Bulkhead Low Loss Cable 50 CM Length Using PE-P160LL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to TNC Female Bulkhead Low Loss Cable 50 CM Length Using PE-P160LL Coax PE3C5260-50CM](https://www.pasternack.com/sma-male-tnc-female-pe-p160ll-cable-assembly-pe3c5260-50cm-p.aspx)

URL: <https://www.pasternack.com/sma-male-tnc-female-pe-p160ll-cable-assembly-pe3c5260-50cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C5260-50CM CAD Drawing

SMA Male to TNC Female Bulkhead Low Loss Cable  
50 CM Length Using PE-P160LL Coax

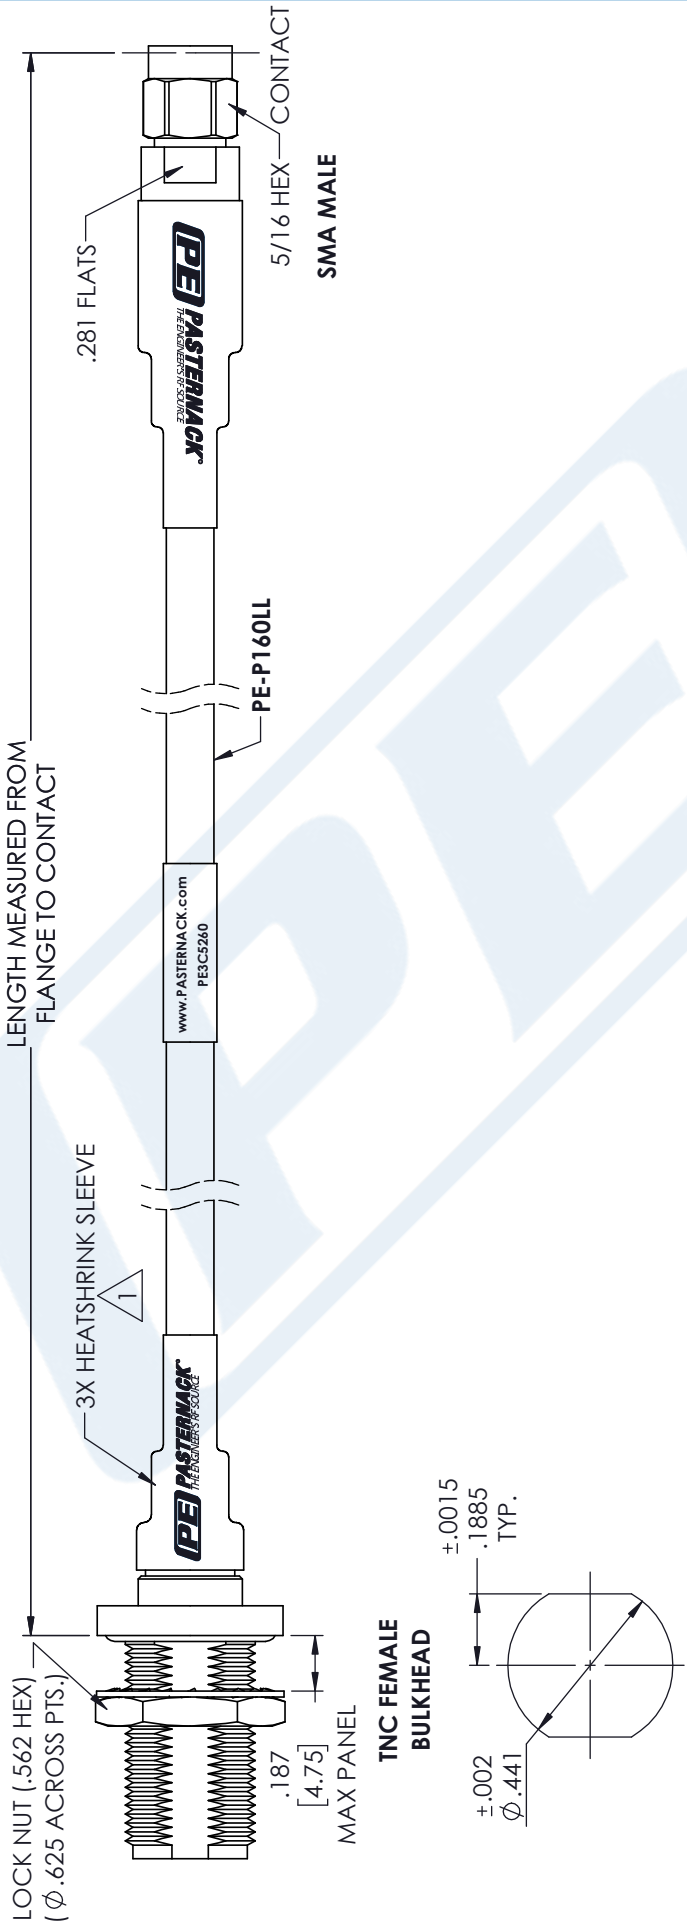

| STANDARD TOLERANCES |        |
|---------------------|--------|
| .X                  | ±0.2   |
| .XX                 | ±0.01  |
| .XXX                | ±0.005 |

NOTES:  
\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES  
1. BLACK HEAT SHRINK WITH WHITE MARKINGS 3 PLACES.

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

|           |          |
|-----------|----------|
| DWG TITLE | PE3C5260 |
| CAGE CODE | 53919    |
| CAD FILE  | 07/13/18 |
| SCALE     | N/A      |
| SIZE      | A        |
|           | CN2379   |



**PASTERNAK**  
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com