



50 Ohm MCX Plug to 75 Ohm BNC Male
Cable Using 75 Ohm RG187 Coax

RF Cable Assemblies Technical Data Sheet

PE3C5491

Configuration

- Connector 1: MCX Plug
- Connector 2: BNC Male
- Cable Type: RG187

Features

- Max Frequency 1 GHz
- 70% Phase Velocity
- PTFE Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C5491 50 ohm MCX plug to 75 ohm BNC male cable using 75 ohm RG187 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack MCX to BNC cable assembly has a plug to male gender configuration with 75 ohm flexible RG187 coax. The PE3C5491 MCX plug to BNC male cable assembly operates to 1 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
Velocity of Propagation		70		%
Capacitance		19.5 [63.98]		pF/ft [pF/m]
DC Resistance Inner Conductor		245 [803.81]		Ω /1000ft [Ω /Km]
Operating Voltage (AC)			250	Vrms

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion loss is estimated as 0.2dB connector loss.

Mechanical Specifications

Cable Assembly

Diameter

0.571 in [14.5 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm MCX Plug to 75 Ohm BNC Male Cable Using 75 Ohm RG187 Coax PE3C5491](#)



50 Ohm MCX Plug to 75 Ohm BNC Male
Cable Using 75 Ohm RG187 Coax

RF Cable Assemblies Technical Data Sheet

PE3C5491

Cable

Cable Type	RG187
Impedance	75 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	PTFE, White
Jacket Diameter	0.102 in [2.59 mm]

Connectors

Description	Connector 1	Connector 2
Type	MCX Plug	BNC Male
Specification	CECC 22220	
Impedance	50 Ohms	75 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30 µin minimum	30 µin minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 µin minimum	100 µin minimum
Coupling Nut Material and Plating		Brass, Nickel
Coupling Nut Plating Specification		100 µin minimum

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm MCX Plug to 75 Ohm BNC Male Cable Using 75 Ohm RG187 Coax PE3C5491](#)



50 Ohm MCX Plug to 75 Ohm BNC Male
Cable Using 75 Ohm RG187 Coax

RF Cable Assemblies Technical Data Sheet

PE3C5491

How to Order

Part Number Configuration:

PE3C5491

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C5491-12 = 12 inches long cable
PE3C5491-100cm = 100 cm long cable

50 Ohm MCX Plug to 75 Ohm BNC Male Cable Using 75 Ohm RG187 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [50 Ohm MCX Plug to 75 Ohm BNC Male Cable Using 75 Ohm RG187 Coax PE3C5491](https://www.pasternack.com/mcx-plug-bnc-male-rg187au-cable-assembly-pe3c5491-p.aspx)

URL: <https://www.pasternack.com/mcx-plug-bnc-male-rg187au-cable-assembly-pe3c5491-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C5491 CAD Drawing

50 Ohm MCX Plug to 75 Ohm BNC Male Cable Using 75 Ohm RG187 Coax

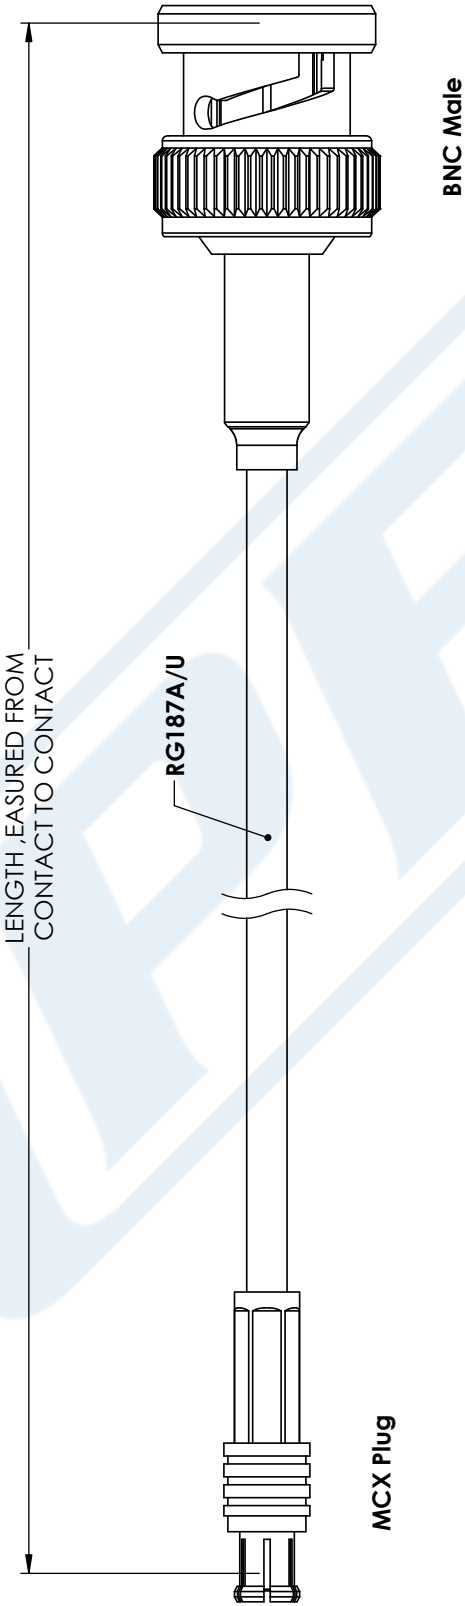

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE	PE3C5491
CAGE CODE	53919

NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME 3. DIMENSIONS ARE IN INCHES [mm].	CAD FILE	09/20/18	SCALE	N/A	SIZE	A	CN2245