



Low PIM 3 Way 4.1/9.5 Mini DIN Power Divider From 698 MHz to 2.7 GHz Rated at 30 Watts

Power Dividers Technical Data Sheet

PE20DV1035

Features

- Low PIM (-160 dBc)
- 30 watt CW Rating
- 698 to 2,700 MHz
- High Power
- 4.1/9.5 Mini DIN Female Connector
- Mounting Bracket

Applications

- Indoor/Outdoor Use (IP67)
- Base Station
- 4G/LTE/AWS/PCS/PMR/UMTS/
- TETRA/WiFi/WiMAX
- Distributed Antenna Systems (DAS)
- Wireless Infrastructure

Description

The PE20DV1035 is a 3 way Wilkinson Power Divider with 4.1/9.5 Mini DIN Female connectors rated to 30 watt CW.

Pasternack's family of Low PIM Power Dividers are designed without solder joints and a unique construction allows for exceptional performance within the 698 to 2,700 MHz frequency range. They are offered in a range of output port options to allow flexibility in the design of your DAS system. Especially designed and manufactured for the rigors of low PIM systems, this family of Tappers is rated at an average power of 300 watt CW, and have PIM performance of -160 dBc or better. They can be used indoor or outdoor as they meet the moisture requirements of IP67. They are available in four different connector types: N, DIN 7-16, 4.3-10, and Mini DIN 4.1/9.5.

Electrical Specifications

Design	Wilkinson
Number of Output Ports	3

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.698		2.7	GHz
Impedance		50		Ohms
Passive Intermodulation			-160	dBc
Input Power (CW)			30	Watts
Reverse Power (CW)			0.4	Watts

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	0.698 to 2.2	2.2 to 2.7				GHz
Input VSWR, Max	1.35:1	1.5:1				
Output VSWR, Max	1.3:1	1.3:1				
Insertion Loss, Max	0.45	0.7				dB
Isolation, Min	20	17				dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM 3 Way 4.1/9.5 Mini DIN Power Divider From 698 MHz to 2.7 GHz Rated at 30 Watts PE20DV1035](#)



Low PIM 3 Way 4.1/9.5 Mini DIN Power Divider
From 698 MHz to 2.7 GHz Rated at 30 Watts

Power Dividers Technical Data Sheet

PE20DV1035

Mechanical Specifications

Weight	0.93 lbs [421.84 g]
Housing Material and Plating	Aluminum, Chem Film

Configuration

Package Type	Connectorized
Input Connector	4.1/9.5 Mini DIN Female
Output Connectors	4.1/9.5 Mini DIN Female
Ingress Protection (IP) Rating	IP67

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM 3 Way 4.1/9.5 Mini DIN Power Divider From 698 MHz to 2.7 GHz Rated at 30 Watts PE20DV1035](#)




Low PIM 3 Way 4.1/9.5 Mini DIN Power Divider
From 698 MHz to 2.7 GHz Rated at 30 Watts

Power Dividers Technical Data Sheet

PE20DV1035

Typical Performance Data

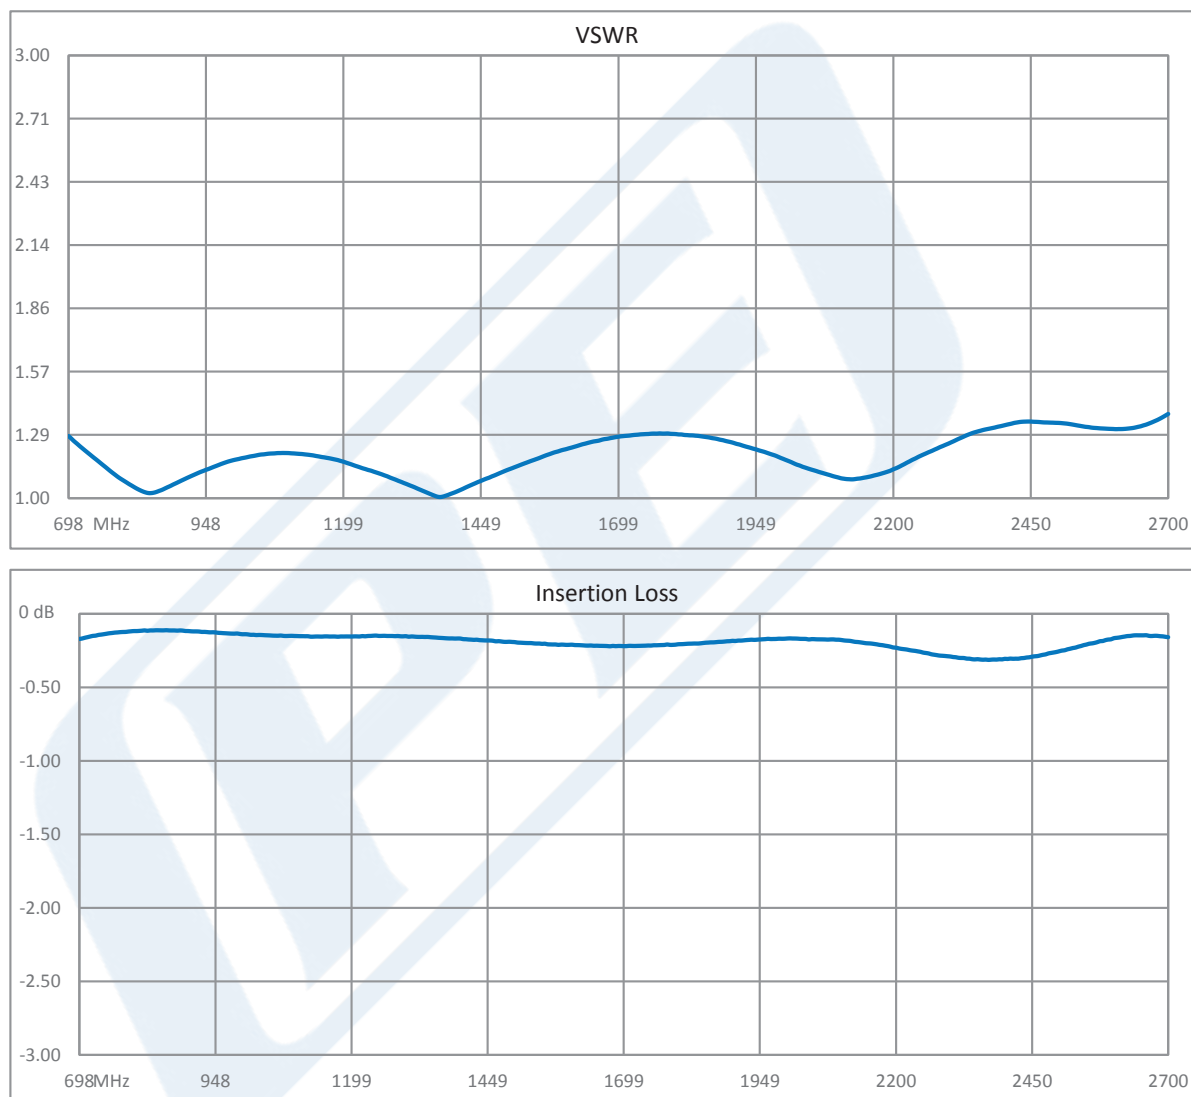


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM 3 Way 4.1/9.5 Mini DIN Power Divider From 698 MHz to 2.7 GHz Rated at 30 Watts PE20DV1035](#)



Low PIM 3 Way 4.1/9.5 Mini DIN Power Divider
From 698 MHz to 2.7 GHz Rated at 30 Watts

Power Dividers Technical Data Sheet

PE20DV1035

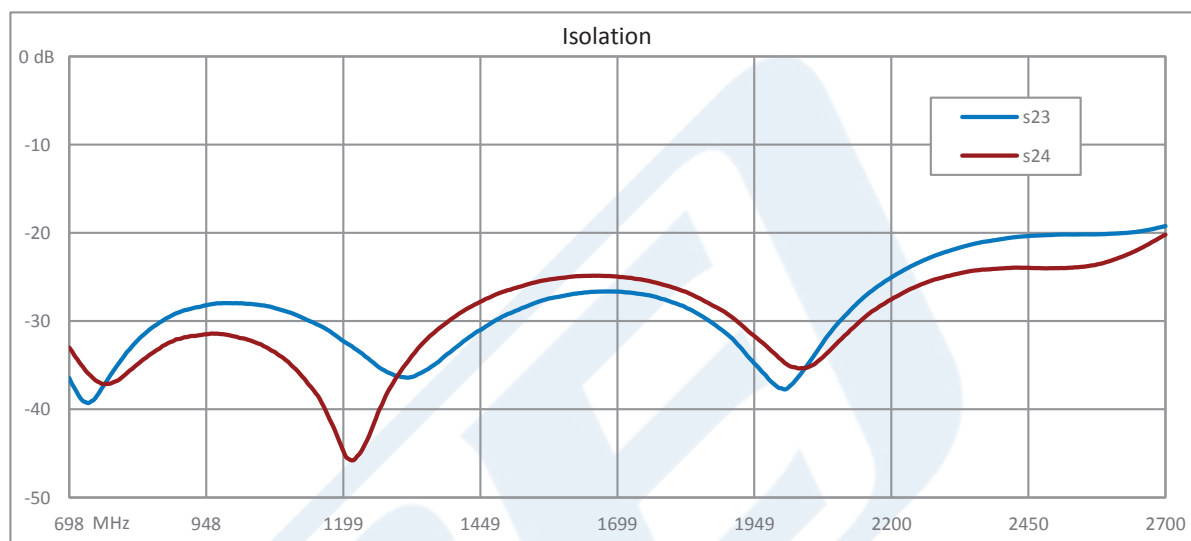

Low PIM 3 Way 4.1/9.5 Mini DIN Power Divider From 698 MHz to 2.7 GHz Rated at 30 Watts from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Low PIM 3 Way 4.1/9.5 Mini DIN Power Divider From 698 MHz to 2.7 GHz Rated at 30 Watts PE20DV1035](https://www.pasternack.com/3-way-4.1-9.5-mini-din-wilkinson-power-divider-698-mhz-2.7-ghz-30-watts-pe20dv1035-p.aspx)

URL: <https://www.pasternack.com/3-way-4.1-9.5-mini-din-wilkinson-power-divider-698-mhz-2.7-ghz-30-watts-pe20dv1035-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE20DV1035 CAD Drawing

Low PIM 3 Way 4.1/9.5 Mini DIN Power Divider From
698 MHz to 2.7 GHz Rated at 30 Watts

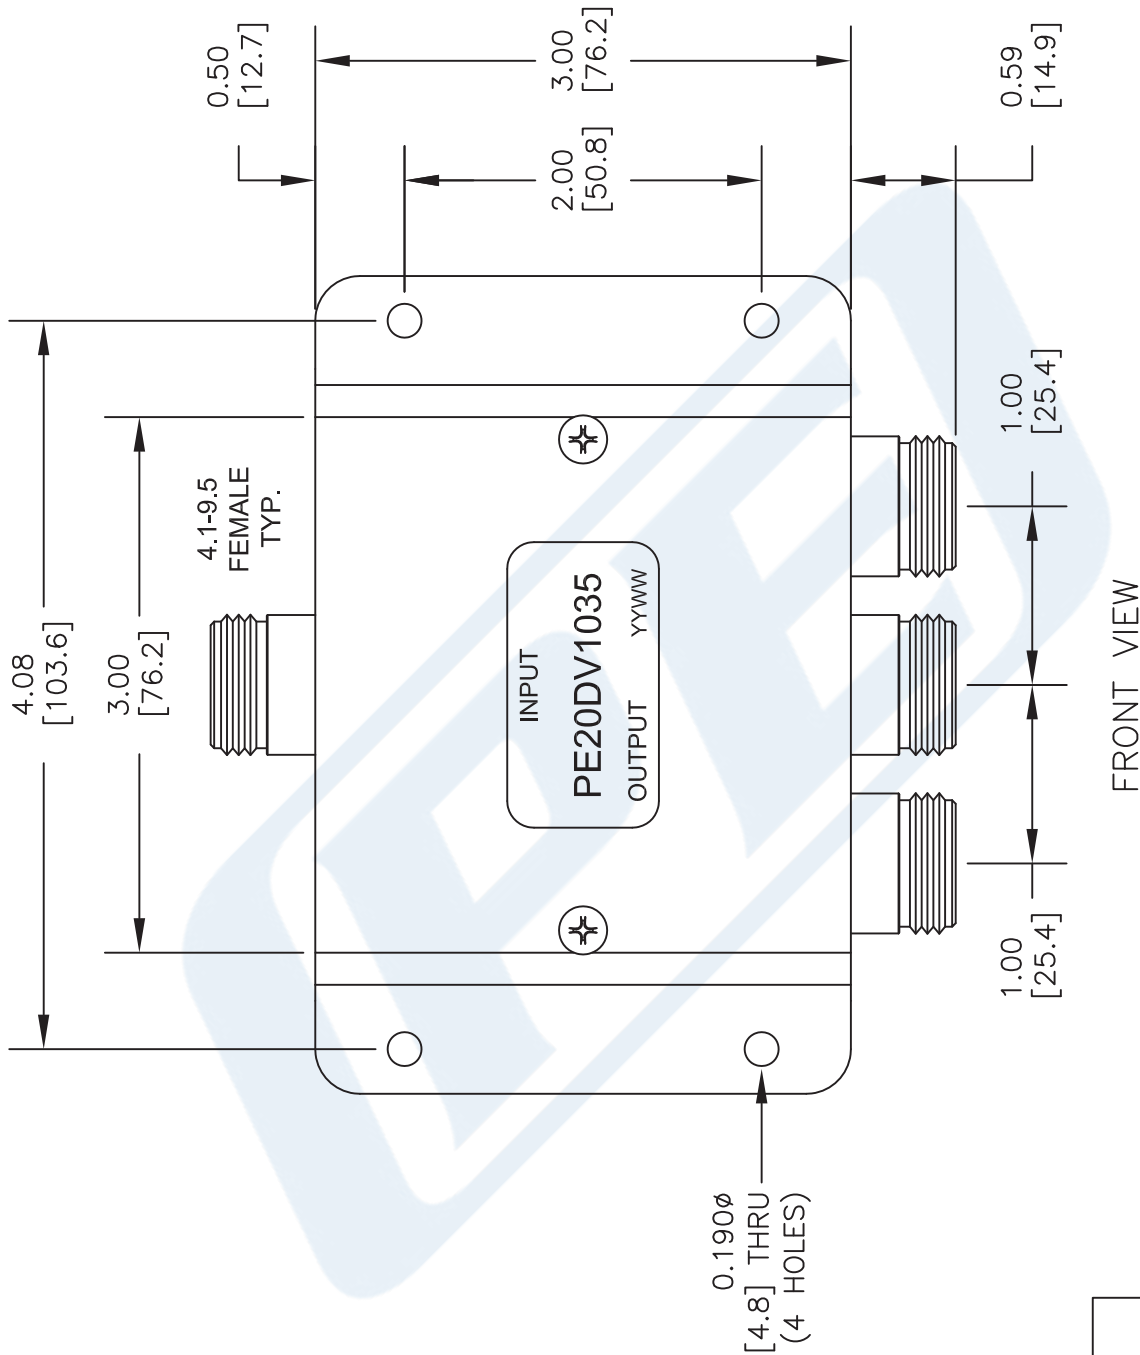

TOLERANCES:
HOLE TOLERANCE: X.XXX ±.003
LENGTH TOLERANCE: X.XXX ±.010
LENGTH TOLERANCE: X.XX ±.03

DWG TITLE

PE20DV1035

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 082216


SCALE N/A

SIZE A

2233

PE20DV1035 CAD Drawing

Low PIM 3 Way 4.1/9.5 Mini DIN Power Divider From
698 MHz to 2.7 GHz Rated at 30 Watts

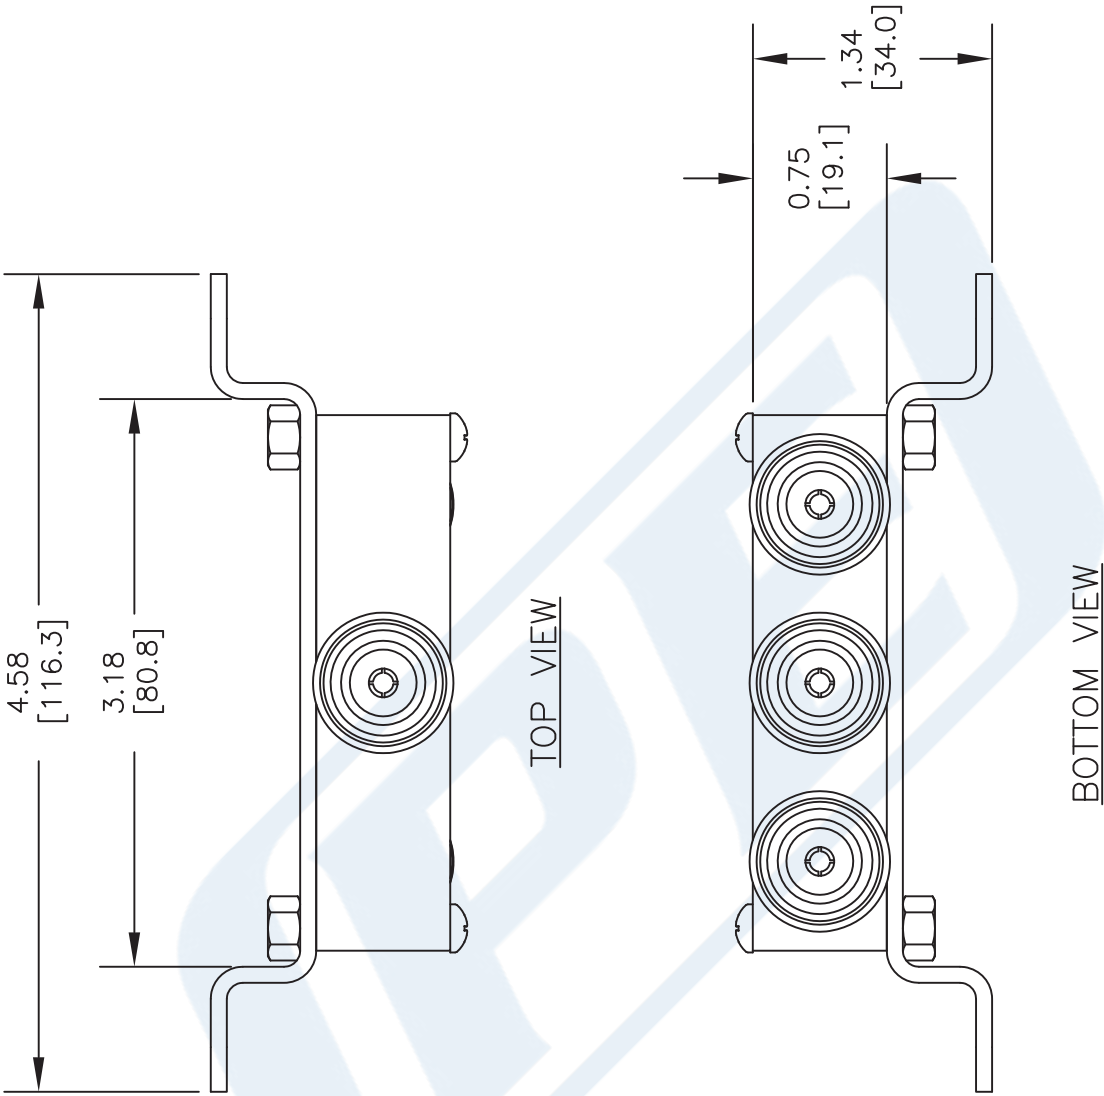

TOP VIEW

BOTTOM VIEW

TOLERANCES:
HOLE TOLERANCE: X.XXX ±.003
LENGTH TOLERANCE: X.XXX ±.010
LENGTH TOLERANCE: X.XX ±.03

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE20DV1035

FSCM NO. 53919

SIZE A

2233

PE PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com