

SMA Male to SMA Male Cable 6 Inch  
Length Using RG142 Coax, RoHS



**RF Cable Assemblies Technical Data Sheet**

**PE3385LF-6**

**Configuration**

- Connector 1: SMA Male
- Connector 2: SMA Male
- Cable Type: RG142

**Features**

- Max Frequency 5 GHz
- Shielding Effectivity > 90 dB
- 69.2% Phase Velocity
- Double Shielded
- FEP Jacket


**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE3385LF-6 SMA male to SMA male 6 inch cable using RG142 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm flexible RG142 coax. The PE3385LF-6 SMA male to SMA male cable assembly operates to 5 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

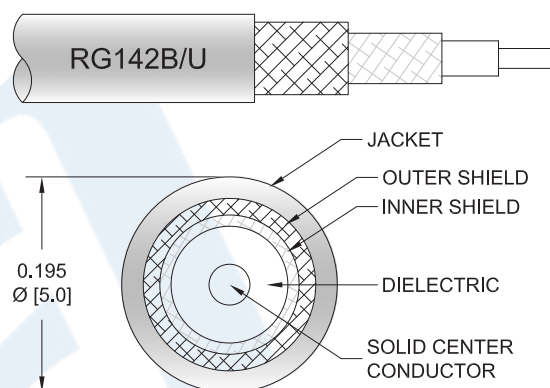

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 6 Inch Length Using RG142 Coax, RoHS PE3385LF-6](#)



## SMA Male to SMA Male Cable 6 Inch Length Using RG142 Coax, RoHS

### RF Cable Assemblies Technical Data Sheet

**PE3385LF-6**

#### Electrical Specifications

| Description             | Minimum | Typical      | Maximum | Units        |
|-------------------------|---------|--------------|---------|--------------|
| Frequency Range         | DC      |              | 5       | GHz          |
| VSWR                    |         |              | 1.4:1   |              |
| Return Loss             |         |              | 15.56   | dB           |
| Velocity of Propagation |         | 69.2         |         | %            |
| RF Shielding            | 90      |              |         | dB           |
| Capacitance             |         | 29.4 [96.46] |         | pF/ft [pF/m] |
| Operating Voltage (AC)  |         |              | 500     | Vrms         |

#### Specifications by Frequency

| Description           | F1    | F2    | F3    | F4    | F5    | Units |
|-----------------------|-------|-------|-------|-------|-------|-------|
| Frequency             | 0.1   | 0.4   | 1     | 3     | 5     | GHz   |
| Insertion Loss (Typ.) | 0.219 | 0.239 | 0.264 | 0.319 | 0.379 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

#### Mechanical Specifications

##### Cable Assembly

|          |                    |
|----------|--------------------|
| Length*  | 6 in [152.4 mm]    |
| Diameter | 0.315 in [8 mm]    |
| Weight   | 0.05 lbs [22.68 g] |

##### Cable

|                                      |                            |
|--------------------------------------|----------------------------|
| Cable Type                           | RG142                      |
| Impedance                            | 50 Ohms                    |
| Inner Conductor Type                 | Solid                      |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver  |
| Dielectric Type                      | PTFE                       |
| Number of Shields                    | 2                          |
| Shield Layer 1                       | Silver Plated Copper Braid |
| Shield Layer 2                       | Silver Plated Copper Braid |
| Jacket Material                      | FEP, Tan                   |
| Jacket Diameter                      | 0.195 in [4.95 mm]         |
| One Time Minimum Bend Radius         | 0.984 in [24.99 mm]        |
| Repeated Minimum Bend Radius         | 2 in [50.8 mm]             |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 6 Inch Length Using RG142 Coax, RoHS PE3385LF-6](#)



SMA Male to SMA Male Cable 6 Inch  
Length Using RG142 Coax, RoHS

**RF Cable Assemblies Technical Data Sheet**

**PE3385LF-6**

**Connectors**

| Description                   | Connector 1        | Connector 2        |
|-------------------------------|--------------------|--------------------|
| Type                          | SMA Male           | SMA Male           |
| Specification                 | MIL-STD-348A       | MIL-STD-348A       |
| Impedance                     | 50 Ohms            | 50 Ohms            |
| Contact Material and Plating  | Brass, Gold        | Brass, Gold        |
| Contact Plating Specification | 50μ in. minimum    | 50μ in. minimum    |
| Dielectric Type               | Teflon             | Teflon             |
| Body Material and Plating     | Brass, Nickel      | Brass, Nickel      |
| Body Plating Specification    | 100μ in. minimum   | 100μ in. minimum   |
| Hex Size                      | 5/16 in            | 5/16 in            |
| Torque                        | 5 in-lbs [0.57 Nm] | 5 in-lbs [0.57 Nm] |

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 6 Inch Length Using RG142 Coax, RoHS PE3385LF-6](#)



## SMA Male to SMA Male Cable 6 Inch Length Using RG142 Coax, RoHS

### RF Cable Assemblies Technical Data Sheet

**PE3385LF-6**

#### How to Order

Part Number Configuration:

**PE3385LF**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3385LF-12 = 12 inches long cable  
PE3385LF-100cm = 100 cm long cable

SMA Male to SMA Male Cable 6 Inch Length Using RG142 Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 6 Inch Length Using RG142 Coax, RoHS PE3385LF-6](#)


URL: <https://www.pasternack.com/sma-male-sma-male-rg142bu-cable-assembly-pe3385lf-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3385LF-6 CAD Drawing

SMA Male to SMA Male Cable 6 Inch Length Using RG142 Coax, RoHS

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in Inches |
|                  |                         |

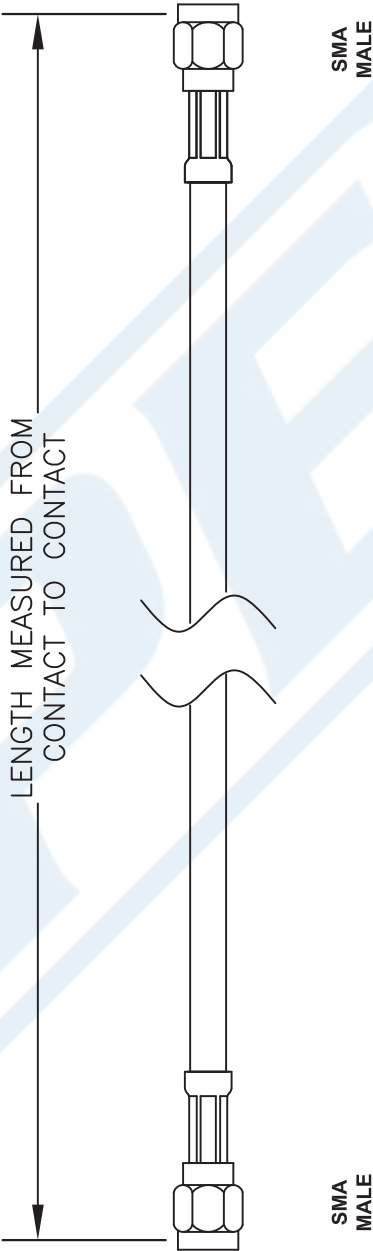

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].  
4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

DWG TITLE  
**PE3385LF-XX**

**PASTERNACK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

|        |                |                 |           |        |     |
|--------|----------------|-----------------|-----------|--------|-----|
| REV. A | FSCM NO. 53919 | CAD FILE 021308 | SCALE N/A | SIZE A | 127 |
|--------|----------------|-----------------|-----------|--------|-----|