



SMA Male to SMB Plug Cable 6 Inch Length Using PE-B100 Coax

RF Cable Assemblies Technical Data Sheet


PE34455LF-6

Configuration

- Connector 1: SMA Male
- Connector 2: SMB Plug
- Cable Type: PE-B100

Features

- Max Frequency 4 GHz
- 62% Phase Velocity
- Double Shielded
- PVC Jacket

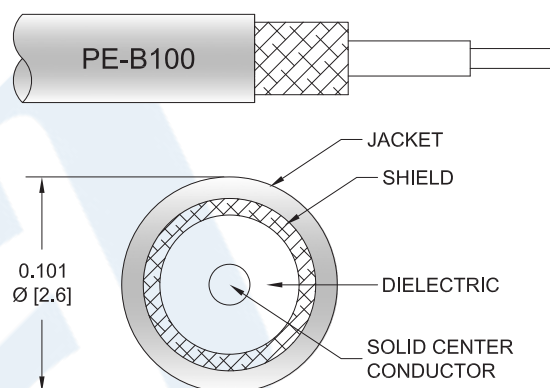

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE34455LF-6 SMA male to SMB plug 6 inch cable using PE-B100 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMA to SMB cable assembly has a male to plug gender configuration with 50 ohm flexible PE-B100 coax. The PE34455LF-6 SMA male to SMB plug cable assembly operates to 4 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMB Plug Cable 6 Inch Length Using PE-B100 Coax PE34455LF-6](#)



SMA Male to SMB Plug Cable 6 Inch Length Using PE-B100 Coax

RF Cable Assemblies Technical Data Sheet

PE34455LF-6

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		4	GHz
VSWR			1.4:1	
Velocity of Propagation		62		%
Capacitance		38 [124.67]		pF/ft [pF/m]
Operating Voltage (AC)			335	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	4	GHz
VSWR (Max.)	1.4:1	1.4:1	1.4:1	1.4:1		
Return Loss (Max.)	15.56	15.563	15.563	15.563		dB

Mechanical Specifications

Cable Assembly

Weight 0.013 lbs [5.9 g]

Cable

Cable Type PE-B100
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper Clad Steel
 Dielectric Type PE
 Number of Shields 2
 Shield Layer 1 PVC
 Shield Layer 2 Tinned Copper Braid
 Jacket Material PVC, Black
 Jacket Diameter 0.101 in [2.57 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMB Plug Cable 6 Inch Length Using PE-B100 Coax PE34455LF-6](#)



SMA Male to SMB Plug Cable 6 Inch Length Using PE-B100 Coax

RF Cable Assemblies Technical Data Sheet

PE34455LF-6

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMB Plug
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification	30μ in. Min	30μ in. minimum
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100μ in. Minimum	100μ in. minimum
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100μ in. Minimum	
Hex Size	5/16 in	
Torque	5 in-lbs [0.57 Nm]	

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMB Plug Cable 6 Inch Length Using PE-B100 Coax PE34455LF-6](#)



SMA Male to SMB Plug Cable 6 Inch Length Using PE-B100 Coax

RF Cable Assemblies Technical Data Sheet

PE34455LF-6

How to Order

Part Number Configuration:

PE34455LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE34455LF-12 = 12 inches long cable
PE34455LF-100cm = 100 cm long cable

SMA Male to SMB Plug Cable 6 Inch Length Using PE-B100 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMB Plug Cable 6 Inch Length Using PE-B100 Coax PE34455LF-6](#)

URL: <https://www.pasternack.com/sma-male-smb-plug-pe-b100-cable-assembly-pe34455lf-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE34455LF-6 CAD Drawing

SMA Male to SMB Plug Cable 6 Inch Length Using PE-B100 Coax

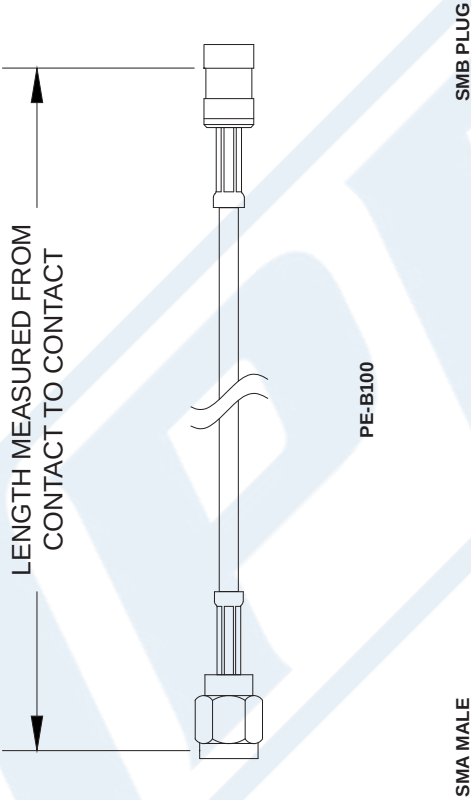

How To Order				Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
Part Number Configuration		Examples		-12	12"	-25CM	25Cm
		PE3000LF-100		-24	24"	-50CM	50Cm
00 - 99999		PE3000-100		-36	36"	-75CM	75Cm
		PE3000LF-100CM		-48	48"	-100CM	100Cm
LF = RoHS Compliant		PE3000-100CM		-60	60"	-125CM	125Cm
		Note: LF applies only to RF cables		-xx	Custom Length	-xxCM	Custom Length

PE3

zzz

yv

xx

uu

00 - 99999

LF = RoHS Compliant

< Blank > = Standard

Note: LF applies only to RF cables

Examples

PE3000LF-100

PE3000-100

PE3000LF-100CM

PE3000-100CM

CM = Centimeters

< Blank > = Inches

Length

PE PASTERNAK®

Pasternack Enterprises, Inc.

P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE34455LF

FSCM NO. 53919

CAD FILE 41613

SCALE N/A

SIZE A

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.

3. DIMENSIONS ARE IN INCHES [mm].

4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

© 2020 Pasternack Enterprises All Rights Reserved

PE34455LF-6 REV 1.1

5