



75 Ohm TNC Male to 75 Ohm TNC Male Cable  
60 Inch Length Using 75 Ohm RG6 Coax

## RF Cable Assemblies Technical Data Sheet

**PE35348-60**

### Configuration

- Connector 1: TNC Male
- Connector 2: TNC Male
- Cable Type: RG6

### Features

- Max Frequency 1 GHz
- Shielding Effectivity > 90 dB
- 65.9% Phase Velocity
- Double Shielded
- PVC (NC) Jacket

### Applications

- General Purpose
- Laboratory Use

### Description

Pasternack's PE35348-60 75 ohm TNC male to 75 ohm TNC male 60 inch cable using 75 ohm RG6 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to TNC cable assembly has a male to male gender configuration with 75 ohm flexible RG6 coax. The PE35348-60 TNC male to TNC male cable assembly operates to 1 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

### Electrical Specifications

| Description             | Minimum | Typical      | Maximum | Units        |
|-------------------------|---------|--------------|---------|--------------|
| Frequency Range         | DC      |              | 1       |              |
| Velocity of Propagation |         | 65.9         |         | %            |
| RF Shielding            | 90      |              |         | dB           |
| Capacitance             |         | 20.6 [67.59] |         | pF/ft [pF/m] |

### Mechanical Specifications

#### Cable Assembly

Weight 0.481 lbs [218.18 g]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm TNC Male to 75 Ohm TNC Male Cable 60 Inch Length Using 75 Ohm RG6 Coax PE35348-60](#)



75 Ohm TNC Male to 75 Ohm TNC Male Cable  
60 Inch Length Using 75 Ohm RG6 Coax

## RF Cable Assemblies Technical Data Sheet

**PE35348-60**

### Cable

|                                      |                            |
|--------------------------------------|----------------------------|
| Cable Type                           | RG6                        |
| Impedance                            | 75 Ohms                    |
| Inner Conductor Type                 | Solid                      |
| Inner Conductor Material and Plating | Copper Clad Steel          |
| Dielectric Type                      | PE                         |
| Number of Shields                    | 2                          |
| Shield Layer 1                       | Silver Plated Copper Braid |
| Shield Layer 2                       | Copper Braid               |
| Jacket Material                      | PVC (NC), Black            |
| Jacket Diameter                      | 0.332 in [8.43 mm]         |
| One Time Minimum Bend Radius         | 3.5 in [88.9 mm]           |

### Connectors

| Description                        | Connector 1      | Connector 2      |
|------------------------------------|------------------|------------------|
| Type                               | TNC Male         | TNC Male         |
| Impedance                          | 75 Ohms          | 75 Ohms          |
| Contact Material and Plating       | Brass, Gold      | Brass, Gold      |
| Contact Plating Specification      | 30μ in. minimum  | 30μ in. minimum  |
| Dielectric Type                    | Teflon           | Teflon           |
| Body Material and Plating          | Brass, Nickel    | Brass, Nickel    |
| Body Plating Specification         | 100μ in. minimum | 100μ in. minimum |
| Coupling Nut Material and Plating  | Brass, Nickel    | Brass, Nickel    |
| Coupling Nut Plating Specification | 100μ in. minimum | 100μ in. minimum |

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm TNC Male to 75 Ohm TNC Male Cable 60 Inch Length Using 75 Ohm RG6 Coax PE35348-60](#)



75 Ohm TNC Male to 75 Ohm TNC Male Cable  
60 Inch Length Using 75 Ohm RG6 Coax

## RF Cable Assemblies Technical Data Sheet

**PE35348-60**

### How to Order

Part Number Configuration:

**PE35348**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE35348-12 = 12 inches long cable  
PE35348-100cm = 100 cm long cable

75 Ohm TNC Male to 75 Ohm TNC Male Cable 60 Inch Length Using 75 Ohm RG6 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [75 Ohm TNC Male to 75 Ohm TNC Male Cable 60 Inch Length Using 75 Ohm RG6 Coax PE35348-60](https://www.pasternack.com/tnc-male-tnc-male-rg6au-cable-assembly-pe35348-60-p.aspx)


URL: <https://www.pasternack.com/tnc-male-tnc-male-rg6au-cable-assembly-pe35348-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE35348-60 CAD Drawing

75 Ohm TNC Male to 75 Ohm TNC Male Cable 60 Inch Length Using 75 Ohm RG6 Coax

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in Inches |

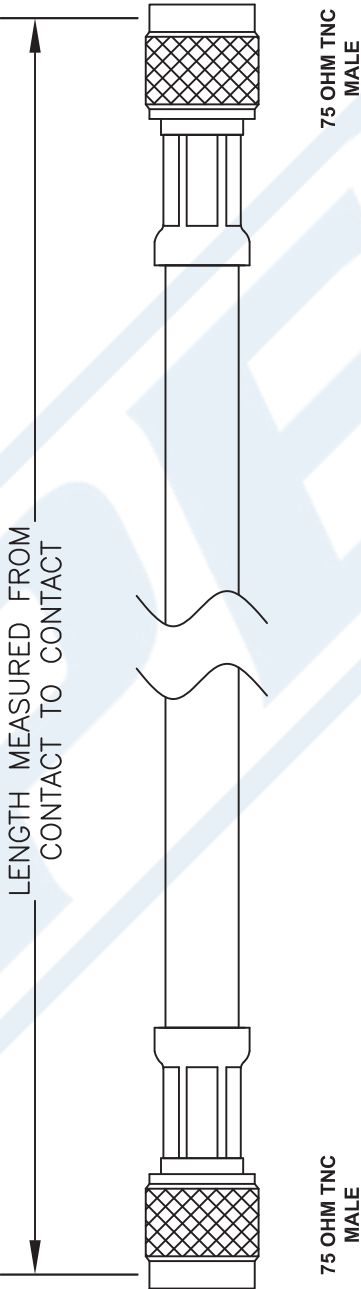

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES (mm).
  4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

DWG TITLE  
**PE35348-XX**

**PE PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
**Phone:** (949) 261-1920 | **Fax:** (949) 261-7451  
**Website:** [www.pasternack.com](http://www.pasternack.com) | **E-Mail:** [sales@pasternack.com](mailto:sales@pasternack.com)

FSCM NO. 53919

REV. A

CAD FILE 020608

SCALE N/A

SIZE A

127