


| COMPONENTS | IMPEDANCE |
|------------|-----------|
| BNC MALE   | 50 OHM    |
| BNC MALE   | 50 OHM    |
| RG316/U    | 50 OHM    |
|            |           |

| Standard Lengths |                         |
|------------------|-------------------------|
| -12              | 12"                     |
| -24              | 24"                     |
| -36              | 36"                     |
| -48              | 48"                     |
| -60              | 60"                     |
| -XXX             | Custom Length in inches |
|                  |                         |



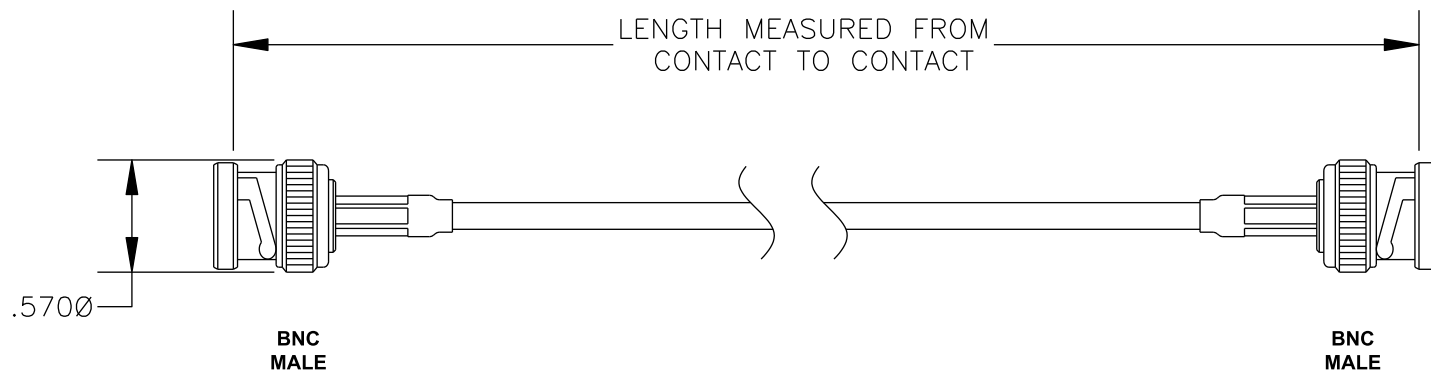

**PASTERNAK ENTERPRISES**  
ESTABLISHED 1972

**PASTERNAK ENTERPRISES, INC.**  
P.O BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)

**COAXIAL & FIBER OPTICS**

|                  |                |   |                      |
|------------------|----------------|---|----------------------|
| DWG TITLE        |                | DES.  |                      |
| <b>PE3584-XX</b> |                | CABLE ASSEMBLY, RG316/U, BNC MALE TO BNC MALE |                      |
| REV. A           | FSCM NO. 53919 | CAD FILE 021308                               | SCALE N/A SIZE A 127 |

- NOTES:**
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES.
  4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $\pm 3/8"$ , WHICHEVER IS GREATER.