



7/16 DIN Male to 7/16 DIN Male Cable 36 Inch
Length Using RG217 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE36134LF-36

Configuration

- Connector 1: 7/16 DIN Male
- Connector 2: 7/16 DIN Male
- Cable Type: RG217

Features

- 66% Phase Velocity
- Double Shielded
- PVC Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE36134LF-36 7/16 DIN male to 7/16 DIN male 36 inch cable using RG217 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack 7/16 DIN to 7/16 DIN cable assembly has a male to male gender configuration with 50 ohm flexible RG217 coax. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Velocity of Propagation		66		%
Capacitance		30.8 [101.05]		pF/ft [pF/m]

Mechanical Specifications

Cable Assembly

Length*	36 in [914.4 mm]
Diameter	1.25 in [31.75 mm]
Weight	1.485 lbs [673.58 g]

Cable

Cable Type	RG217
Impedance	50 Ohms
Inner Conductor Type	Solid

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to 7/16 DIN Male Cable 36 Inch Length Using RG217 Coax, RoHS PE36134LF-36](#)



7/16 DIN Male to 7/16 DIN Male Cable 36 Inch
Length Using RG217 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE36134LF-36

Inner Conductor Material and Plating	Copper
Dielectric Type	PE
Number of Shields	2
Shield Layer 1	Copper Braid
Shield Layer 2	Copper Braid
Jacket Material	PVC, Black
Jacket Diameter	0.545 in [13.84 mm]

Connectors

Description	Connector 1	Connector 2
Type	7/16 DIN Male	7/16 DIN Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Silver	Silver
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Nickel	Brass, Nickel
Coupling Nut Material and Plating	Brass, Nickel	Brass, Nickel
Hex Size	1 1/4 in	1 1/4 in
Torque	18.417 ft-lbs [24.97 Nm]	18.417 ft-lbs [24.97 Nm]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to 7/16 DIN Male Cable 36 Inch Length Using RG217 Coax, RoHS PE36134LF-36](#)



7/16 DIN Male to 7/16 DIN Male Cable 36 Inch
Length Using RG217 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE36134LF-36

How to Order

Part Number Configuration:

PE36134LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE36134LF-12 = 12 inches long cable
PE36134LF-100cm = 100 cm long cable

7/16 DIN Male to 7/16 DIN Male Cable 36 Inch Length Using RG217 Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to 7/16 DIN Male Cable 36 Inch Length Using RG217 Coax, RoHS PE36134LF-36](https://www.pasternack.com/7-16-male-7-16-male-rg217u-cable-assembly-pe36134lf-36-p.aspx)


URL: <https://www.pasternack.com/7-16-male-7-16-male-rg217u-cable-assembly-pe36134lf-36-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE36134LF-36 CAD Drawing

7/16 DIN Male to 7/16 DIN Male Cable 36 Inch Length Using RG217 Coax, RoHS

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	PCR PE36134	9/10/2020	S. ELLIS

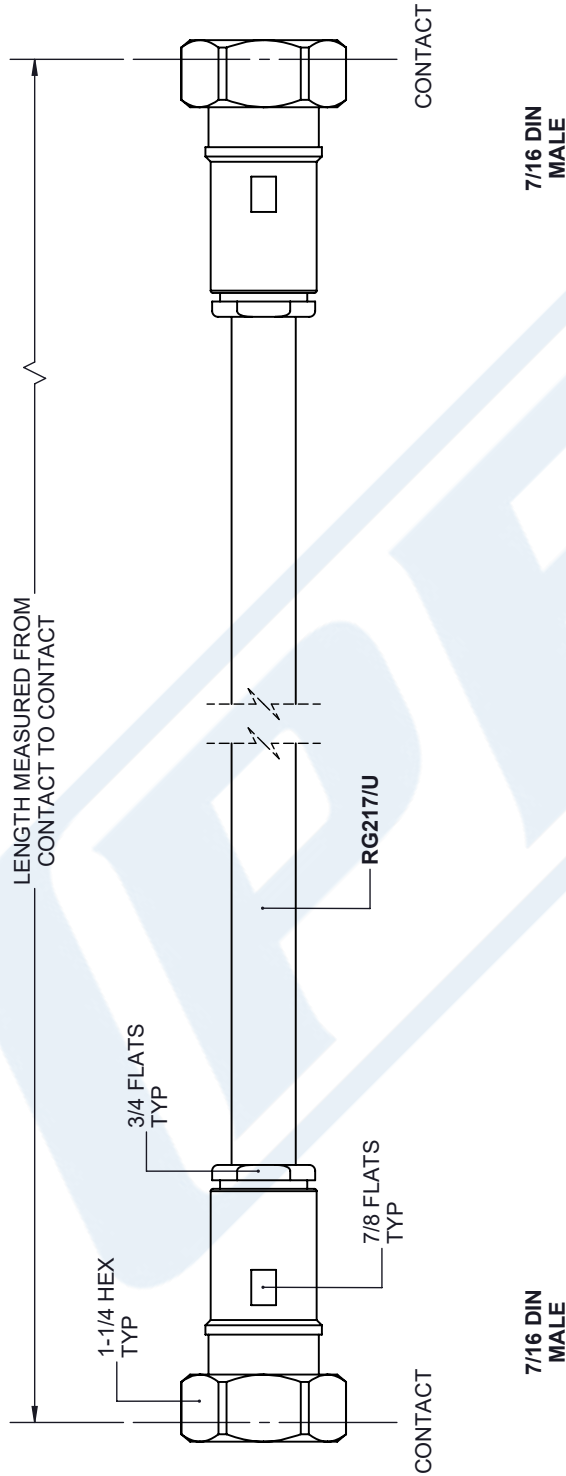

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS		 PASTERNAK® an INFINITE brand Pasternack Enterprises, Inc. P.O Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com		THIRD-ANGLE PROJECTION  THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED. SHEET 1 OF 1 SCALE N/A			
TOLERANCES: X = ± .2 [.008] FRACTIONS .XX = ± .02 [.51] ± 1/32 XXX = ± .005 [.13] ANGLES ± 1° CABLE LENGTH (L) TOLERANCES: L ≤ 12 [305] = ± .1 [25] / -0 12 [305] < L ≤ 60 [1524] = ± .2 [51] / -0 60 [1524] < L ≤ 120 [3048] = ± .4 [102] / -0 120 [3048] < L ≤ 300 [7620] = ± .6 [152] / -0 300 [7620] < L = +5% L / -0		SIZE A		CAGE CODE 53919	DRAWN BY K.DANG	ITEM NO. PE36134LF	REV A
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.							

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.