




2.4mm Male to 2.4mm Male Test Cable 48 Inch Length Using PE-P160 Coax

RF Cable Assemblies Technical Data Sheet

PE363-48

Configuration

- Connector 1: 2.4mm Male
- Connector 2: 2.4mm Male
- Cable Type: PE-P160

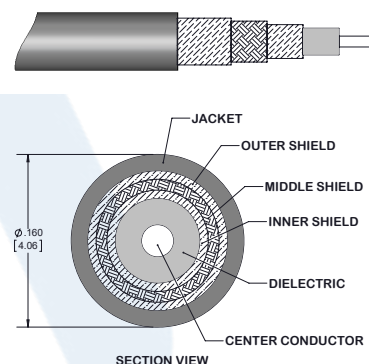

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR			1.4:1	
Velocity of Propagation		78		%
RF Shielding	90			dB
Capacitance		26 [85.3]		pF/ft [pF/m]
Inductance		66 [216.54]		uH/ft [uH/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	2.5	5	10	20	40	GHz
Insertion Loss (Max.)	0.97	1.38	2.05	2.97	4.47	dB
Insertion Loss (Typ.)	0.8	1.22	1.81	2.69	4.07	dB

Mechanical Specifications

Cable Assembly

Length*	48 in [121.92 cm]
Diameter	0.33 in [8.38 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Male to 2.4mm Male Test Cable 48 Inch Length Using PE-P160 Coax PE363-48](#)



2.4mm Male to 2.4mm Male Test Cable 48 Inch Length Using PE-P160 Coax

RF Cable Assemblies Technical Data Sheet

PE363-48

Weight 0.15 lbs [68.04 g]

Cable

Cable Type PE-P160
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper, Silver
Dielectric Type PTFE
Number of Shields 3
Shield Layer 1 Silver Plated Copper
Shield Layer 2 Aluminum Tape
Shield Layer 3 Silver Plated Copper
Jacket Material ETFE, Gray
Jacket Diameter 0.16 in [4.06 mm]

One Time Minimum Bend Radius 0.8 in [20.32 mm]
Typical Flex Cycles 10,000

Connectors

Description	Connector 1	Connector 2
Type	2.4mm Male	2.4mm Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	ASTM-B488 50µ In. Minimum	ASTM-B488 50µ In. Minimum
Dielectric Type	PEI	PEI
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Coupling Nut Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Hex Size	5/16 Inch	5/16 Inch
Torque	8 in-lbs [0.9 Nm]	8 in-lbs [0.9 Nm]

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Environmental Specifications

Temperature

Operating Range -45 to +125 deg C

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Male to 2.4mm Male Test Cable 48 Inch Length Using PE-P160 Coax PE363-48](#)



2.4mm Male to 2.4mm Male Test Cable
48 Inch Length Using PE-P160 Coax

RF Cable Assemblies Technical Data Sheet

PE363-48

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

How to Order

Part Number Configuration:

PE363

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE363-12 = 12 inches long cable
PE363-100cm = 100 cm long cable

2.4mm Male to 2.4mm Male Test Cable 48 Inch Length Using PE-P160 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Male to 2.4mm Male Test Cable 48 Inch Length Using PE-P160 Coax PE363-48](#)

URL: <https://www.pasternack.com/2.4mm-male-2.4mm-male-pe-p160-cable-assembly-pe363-48-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE363-48 CAD Drawing

2.4mm Male to 2.4mm Male Test Cable 48 Inch Length Using PE-P160 Coax

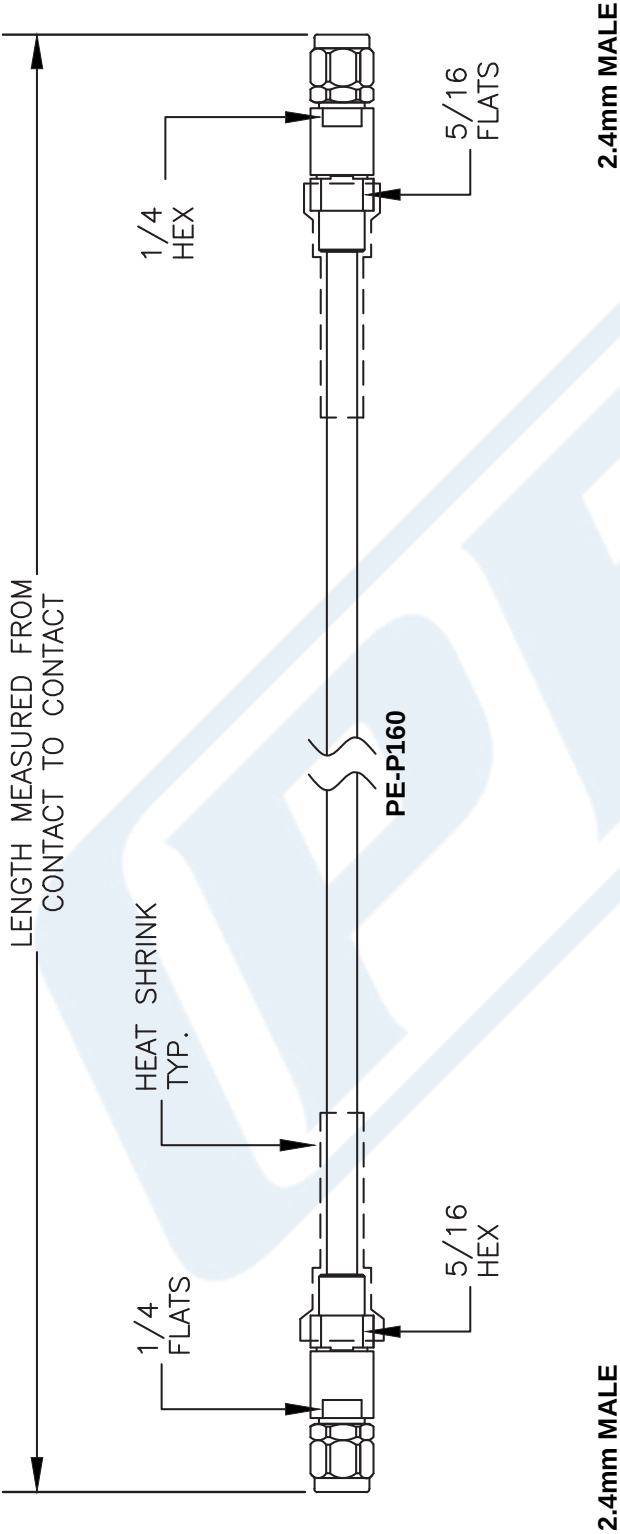

How To Order			Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
Part Number Configuration		Examples	-12	12"	-25CM	25Cm
PE3	zzz	yy	-24	24"	-50CM	50Cm
		xx	-36	36"	-75CM	75Cm
		uu	-48	48"	-100CM	100Cm
00 - 99999	CM = Centimeters		-60	60"	-125CM	125Cm
LF = RoHS Compliant	< Blank > = Inches		-xx	Custom Length	-xxCM	Custom Length
Note: LF applies only to RF cables		Length				

**PASTERNAK®**
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE
PE363

FSCM NO. 53919

CAD FILE 061013

SCALE N/A

SIZE A

2233