



2.92mm Male to 2.92mm Male Test Cable 60 Inch
Length Using PE-P102 Coax, RoHS

TECHNICAL DATA SHEET

PE371-60

Configuration

Connector 1	2.92mm Male
Connector 2	2.92mm Male
Cable Type	PE-P102

Electrical Specifications

Frequency Range	DC to 40 GHz
Impedance	50 Ohms
Maximum VSWR	1.4:1
Velocity of Propagation	76 %
RF Shielding	90 dB
Peak Power	550 Watts

Typical Performance by Frequency

Frequency 1

Frequency	6 GHz
VSWR	1.25:1
Insertion Loss	3.75 dB
Power Handling, Watts	160

Frequency 2

Frequency	12 GHz
VSWR	1.25:1
Insertion Loss	5.4 dB
Power Handling	110 Watts

Frequency 3

Frequency	18 GHz
VSWR	1.25:1
Insertion Loss	6.8 dB
Power Handling	89 Watts

Frequency 4

Frequency	26.5 GHz
VSWR	1.4:1
Insertion Loss	8.35 dB
Power Handling	73 Watts

Frequency 5

Frequency	40 GHz
VSWR	1.4:1
Insertion Loss	10.65 dB
Power Handling	58 Watts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Test Cable 60 Inch Length Using PE-P102 Coax, RoHS PE371-60](#)



2.92mm Male to 2.92mm Male Test Cable 60 Inch
Length Using PE-P102 Coax, RoHS

TECHNICAL DATA SHEET

PE371-60

Mechanical Specifications

Temperature

Temperature Operating Range -65 to +165 deg C

Size

Length 60 in [152.4 cm]
Diameter 0.38 in [9.65 mm]
Cable Color Gray
One Time Minimum Bend Radius 0.32 in [8.13 mm]

Cable

Cable Type PE-P102
Inner Conductor Type Stranded
Cable Inner Conductor Copper, Silver
No of Shields 3
Dielectric Type PTFE
Jacket Material ETFE
Jacket Diameter 0.102 in [2.59 mm]

Connector 1

Type 2.92mm Male
Configuration Straight
Inner Conductor Material and Plating Beryllium Copper, Gold
Inner Conductor Plating Specification ASTM-B488 50µ In. Minimum
Coupling Nut Material and Plating Passivated Stainless Steel
Coupling Nut Plating Specification SAE-AMS-2700
Hex Size 5/16 Inch
Torque 8 in-lbs [0.9 Nm]
Body Material and Plating Passivated Stainless Steel
Body Plating Specification SAE-AMS-2700
Dielectric Type PPO

Connector 2

Type 2.92mm Male
Configuration Straight
Inner Conductor Material and Plating Beryllium Copper, Gold
Inner Conductor Plating Specification ASTM-B488 50µ In. Minimum
Coupling Nut Material and Plating Passivated Stainless Steel
Coupling Nut Plating Specification SAE-AMS-2700
Hex Size 5/16 Inch
Torque 8 in-lbs [0.9 Nm]
Body Material and Plating Passivated Stainless Steel
Body Plating Specification SAE-AMS-2700
Dielectric Type PPO

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Test Cable 60 Inch Length Using PE-P102 Coax, RoHS PE371-60](#)



2.92mm Male to 2.92mm Male Test Cable 60 Inch
Length Using PE-P102 Coax, RoHS

TECHNICAL DATA SHEET

PE371-60

Compliance Certifications (visit www.Pasternack.com for current document)
RoHS Compliant Yes

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

2.92mm Male to 2.92mm Male Test Cable 60 Inch Length Using PE-P102 Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Test Cable 60 Inch Length Using PE-P102 Coax, RoHS PE371-60](http://www.pasternack.com/2.92mm-male-2.92mm-male-pe-p102-cable-assembly-pe371-60-p.aspx)

URL: <http://www.pasternack.com/2.92mm-male-2.92mm-male-pe-p102-cable-assembly-pe371-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE371-60 CAD Drawing

2.92mm Male to 2.92mm Male Test Cable 60 Inch Length Using PE-P102 Coax, RoHS

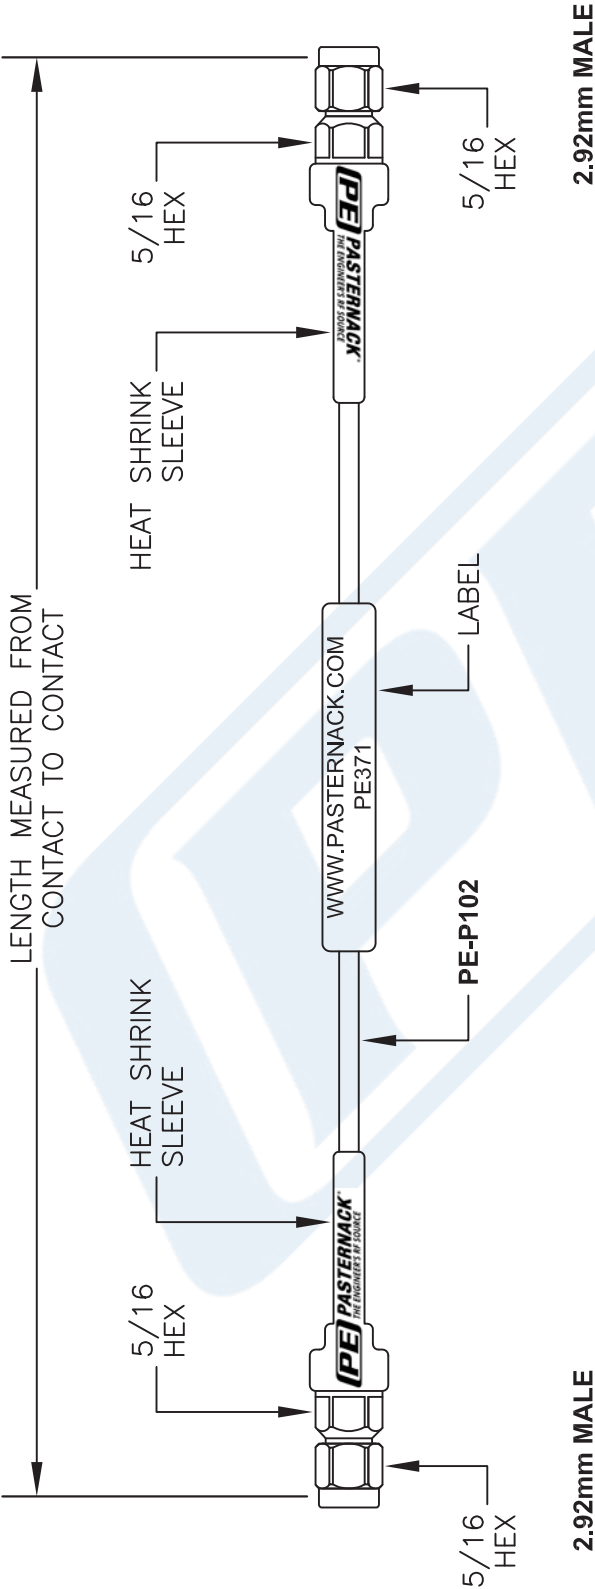

NOTE:
LABEL FOR CABLE LENGTHS 48" OR SHORTER TO BE CENTERED. 48" OR LONGER WILL BE 12" AWAY FROM CONNECTOR.

How To Order					
Part Number Configuration		Examples			
PE3zzzzz YV - xx uu		PE3000LF-100		-12	
		PE3000-100		-24	
		PE3000LF-100CM		-36	
		PE3000-100CM		-48	
				-60	
				-xx	
LF = RoHS Compliant < Blank > = Standard		CM = Centimeters < Blank > = Inches		Length	
Note: LF applies only to RF cables					
				Part # Ext.	Length In Inches
				Part # Ext.	Length In Centimeters
				-25CM	25Cm
				-50CM	50Cm
				-75CM	75Cm
				-100CM	100Cm
				-125CM	125Cm
				-xxCM	Custom Length

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE
PE371

PE PASTERNAK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 110414

SCALE N/A

SIZE A

2233