



1.85mm Male to 1.85mm Male Test Cable 100 cm
Length Using PE-P102 Coax, RoHS

TECHNICAL DATA SHEET

PE372-100CM

Configuration

Connector 1	1.85mm Male
Connector 2	1.85mm Male
Cable Type	PE-P102

Electrical Specifications

Frequency Range	DC to 65 GHz
Impedance	50 Ohms
Velocity of Propagation	76 %
RF Shielding	90 dB

Typical Performance by Frequency

Frequency 1

Frequency	6 GHz
VSWR	1.25:1
Insertion Loss,	2.5 dB
Power Handling, Watts	160

Frequency 2

Frequency	12 GHz
VSWR	1.25:1
Insertion Loss	3.55 dB
Power Handling	110 Watts

Frequency 3

Frequency	18 GHz
VSWR	1.25:1
Insertion Loss	4.5 dB
Power Handling	89 Watts

Frequency 4

Frequency	26.5 GHz
VSWR	1.4:1
Insertion Loss	5.47 dB
Power Handling	73 Watts

Frequency 5

Frequency	40 GHz
VSWR	1.4:1
Insertion Loss	7 dB
Power Handling	58 Watts

Frequency 6

Frequency	50 GHz
VSWR	1.4:1
Insertion Loss	8 dB

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: 1.85mm Male to 1.85mm Male Test Cable 100 cm Length Using PE-P102 Coax, RoHS PE372-100CM



1.85mm Male to 1.85mm Male Test Cable 100 cm
Length Using PE-P102 Coax, RoHS

TECHNICAL DATA SHEET

PE372-100CM

Power Handling 52 Watts

Frequency 7

Frequency 65 GHz
VSWR 1.4:1
Insertion Loss 9.35 dB

Mechanical Specifications

Size

Length 39.37 in [100 cm]
Diameter 0.375 in [9.53 mm]
Cable Color Gray
One Time Minimum Bend Radius 0.32 in [8.13 mm]
Repeated Minimum Bend Radius 0.96 in [24.38 mm]

Cable

Cable Type PE-P102
Inner Conductor Type Stranded
Cable Inner Conductor Copper, Silver
No of Shields 3
Dielectric Type PTFE
Jacket Material ETFE
Jacket Diameter 0.102 in [2.59 mm]

Connector 1

Type 1.85mm Male
Configuration Straight
Inner Conductor Material and Plating Beryllium Copper, Gold
Inner Conductor Plating Specification ASTM-B488 50µ In. Minimum
Coupling Nut Material and Plating Passivated Stainless Steel
Coupling Nut Plating Specification SAE-AMS-2700
Hex Size 5/16 Inch
Torque 8 in-lbs [0.9 Nm]
Body Material and Plating Passivated Stainless Steel
Body Plating Specification SAE-AMS-2700
Dielectric Type PPO

Connector 2

Type 1.85mm Male
Configuration Straight
Inner Conductor Material and Plating Beryllium Copper, Gold
Inner Conductor Plating Specification ASTM-B488 50µ In. Minimum
Coupling Nut Material and Plating Passivated Stainless Steel
Coupling Nut Plating Specification SAE-AMS-2700
Hex Size 5/16 Inch
Torque 8 in-lbs [0.9 Nm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.85mm Male to 1.85mm Male Test Cable 100 cm Length Using PE-P102 Coax, RoHS PE372-100CM](#)



1.85mm Male to 1.85mm Male Test Cable 100 cm
Length Using PE-P102 Coax, RoHS

TECHNICAL DATA SHEET

PE372-100CM

Body Material and Plating
Body Plating Specification
Dielectric Type

Passivated Stainless Steel
SAE-AMS-2700
PPO

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Yes

Notes:

- Values at +25 °C, sea level

1.85mm Male to 1.85mm Male Test Cable 100 cm Length Using PE-P102 Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [1.85mm Male to 1.85mm Male Test Cable 100 cm Length Using PE-P102 Coax, RoHS PE372-100CM](http://www.pasternack.com/1.85mm-male-1.85mm-male-pe-p102-cable-assembly-pe372-100cm-p.aspx)

URL: <http://www.pasternack.com/1.85mm-male-1.85mm-male-pe-p102-cable-assembly-pe372-100cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE372-100CM CAD Drawing

1.85mm Male to 1.85mm Male Test Cable 100 cm Length Using PE-P102 Coax, RoHS

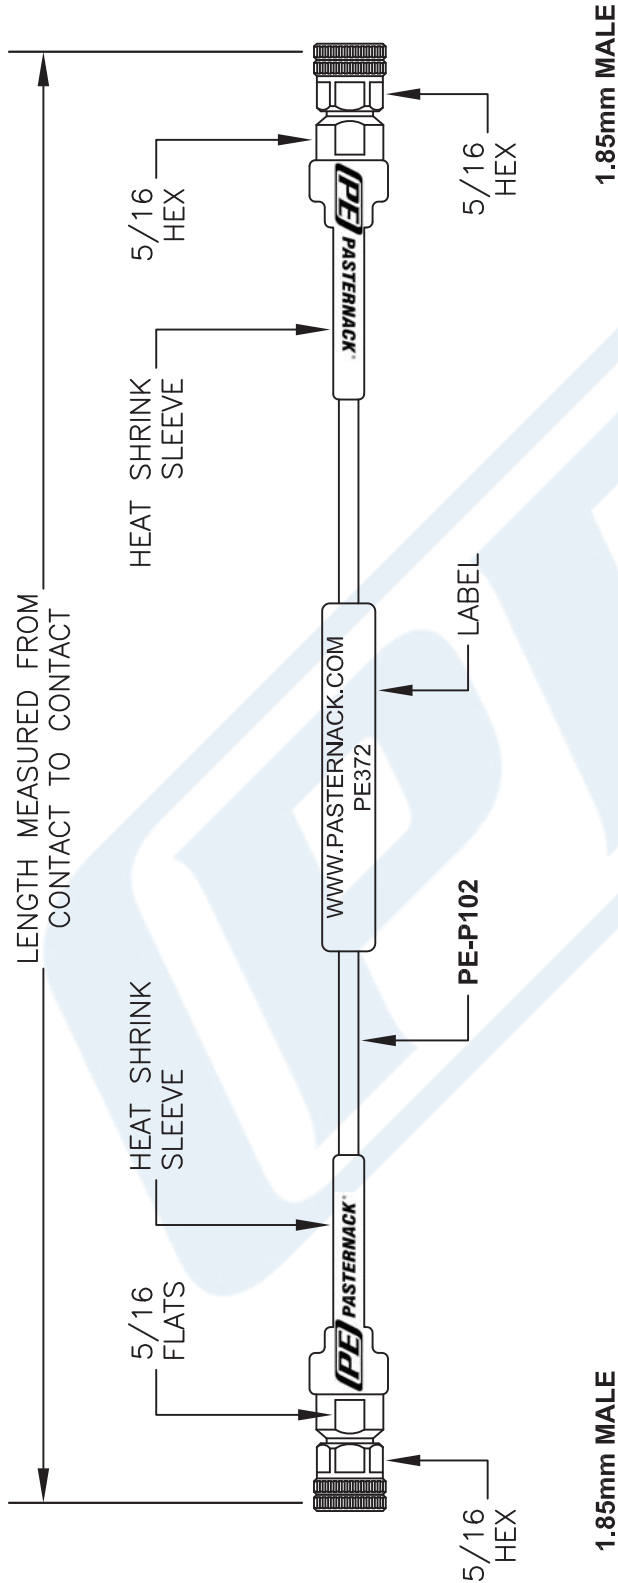

NOTE:
LABEL FOR CABLE LENGTHS 48" OR SHORTER TO BE CENTERED. 48" OR LONGER WILL BE 12" AWAY FROM CONNECTOR.

How To Order		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
Part Number Configuration PE3 [zzz] - [xx] [uu] 00 - 99999 CM = Centimeters < Blank > = Inches Length	Examples PE3000-100 PE3000-100CM	-12	12"	-25CM	25Cm
		-24	24"	-50CM	50Cm
		-36	36"	-75CM	75Cm
		-48	48"	-100CM	100Cm
		-60	60"	-125CM	125Cm
		-xx	Custom Length	-xxCM	Custom Length

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].
 4. LENGTH TOLERANCE IS $\pm 1.5\%$ OR $3/8"$, WHICHEVER IS GREATER.

DWG TITLE

PE372

PE PASTERNAK®
 Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

FSCM NO. 53919

CAD FILE 091713

SCALE N/A

SIZE A

2233