



TNC Male to TNC Male Cable Using RG316 Coax, RoHS

RF Cable Assemblies Technical Data Sheet


PE3747LF

Configuration

- Connector 1: TNC Male
- Connector 2: TNC Male
- Cable Type: RG316

Features

- Max Frequency 3 GHz
- FEP Jacket

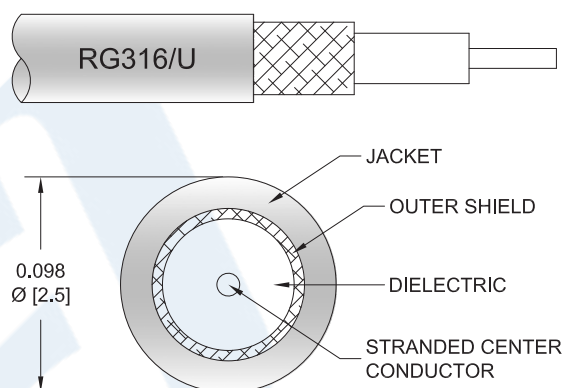

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3747LF TNC male to TNC male cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to TNC cable assembly has a male to male gender configuration with 50 ohm flexible RG316 coax. The PE3747LF TNC male to TNC male cable assembly operates to 3 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Cable Using RG316 Coax, RoHS PE3747LF](#)



TNC Male to TNC Male Cable Using RG316 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3747LF

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-----------------|---------|-------------|---------|--------------|
| Frequency Range | DC | | 3 | GHz |
| VSWR | | | 1.4:1 | |
| Capacitance | | 32 [104.99] | | pF/ft [pF/m] |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|------|------|-------|------|------|-------|
| Frequency | 0.1 | 0.25 | 0.5 | 1 | 3 | GHz |
| Insertion Loss (Typ.) | 0.31 | 0.36 | 0.438 | 0.58 | 0.78 | dB/ft |
| | 1.02 | 1.18 | 1.44 | 1.9 | 2.56 | dB/m |

Mechanical Specifications

Cable Assembly

Weight 0.066 lbs [29.94 g]

Cable

Cable Type RG316
 Impedance 50 Ohms
 Inner Conductor Type Stranded
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 1
 Shield Layer 1 Silver Plated Copper Braid
 Jacket Material FEP, Tan
 Jacket Diameter 0.098 in [2.49 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Cable Using RG316 Coax, RoHS PE3747LF](#)



TNC Male to TNC Male Cable Using RG316 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3747LF

Connectors

| Description | Connector 1 | Connector 2 |
|-------------------------------|------------------|------------------|
| Type | TNC Male | TNC Male |
| Specification | MIL-STD-348A | MIL-STD-348A |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Brass, Gold | Brass, Gold |
| Contact Plating Specification | 30μ in. minimum | 30μ in. minimum |
| Dielectric Type | Teflon | Teflon |
| Body Material and Plating | Brass, Nickel | Brass, Nickel |
| Body Plating Specification | 100μ in. minimum | 100μ in. minimum |

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Cable Using RG316 Coax, RoHS PE3747LF](#)



TNC Male to TNC Male Cable Using RG316 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3747LF

How to Order

Part Number Configuration:

PE3747LF

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3747LF-12 = 12 inches long cable
PE3747LF-100cm = 100 cm long cable

TNC Male to TNC Male Cable Using RG316 Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male to TNC Male Cable Using RG316 Coax, RoHS PE3747LF](https://www.pasternack.com/tnc-male-tnc-male-rg316u-cable-assembly-pe3747lf-p.aspx)

URL: <https://www.pasternack.com/tnc-male-tnc-male-rg316u-cable-assembly-pe3747lf-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

TNC Male to TNC Male Cable Using RG316 Coax, RoHS

Technical drawing of a TNC Male Coaxial Cable Assembly. The drawing shows a central coaxial cable with a braided shield, labeled "RG316/U". The cable is terminated at both ends with TNC Male connectors. The connectors consist of a central pin and an outer contact sleeve. The drawing includes dimension lines indicating the length of the cable and the distance from the contact to the contact. The text "TNC MALE" is written at both ends of the assembly.

TNC MALE

CONTACT

TNC MALE

CONTACT

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.