



SMA Female Bulkhead to UMCX Plug Cable 6 Inch Length Using 1.13mm Coax

TECHNICAL DATA SHEET

PE38297-6

SMA Female Bulkhead to UMCX Plug Cable 6 Inch Length Using 1.13mm Coax

Configuration

Connector 1	SMA Female Bulkhead
Connector 1 Specification	MIL-STD-348A
Connector 2	UMCX Plug Right Angle
Cable Type	1.13mm

Electrical Specifications

Frequency Range, GHz	DC to 3
Impedance, Ohms	50
Maximum VSWR	1.5:1
Maximum Operating Voltage, Vrms	100
Dielectric Withstanding Voltage (AC), Vrms	200

Mechanical Specifications

Cable Assembly

Cable Type	1.13mm
------------	--------

Temperature

Temperature Operating Range, deg C	-40 to +90
------------------------------------	------------

Size

Length, in [mm]	6 [152.4]
Diameter, in [mm]	0.044 [1.12]
Weight, lbs [g]	0.1 [45.36]

Cable

No of Shields	1
Jacket Material	FEP
Jacket Diameter, in [mm]	0.044 [1.12]

Connector 1

Type	SMA Female Bulkhead
Configuration	Straight
Mount Method	Bulkhead
Inner Conductor Material and Plating	Beryllium Copper, Gold
Body Material and Plating	Brass, Gold
Dielectric Type	Teflon

Connector 2

Type	UMCX Plug Right Angle
Configuration	Right Angle

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Bulkhead to UMCX Plug Cable 6 Inch Length Using 1.13mm Coax PE38297-6](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SMA Female Bulkhead to UMCX Plug Cable
6 Inch Length Using 1.13mm Coax

TECHNICAL DATA SHEET

PE38297-6

Inner Conductor Material and Plating
Body Material and Plating
Dielectric Type

Phosphor Bronze, Gold
Phosphor Bronze, Gold
PBT

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data

Notes:

Values at 25 °C, sea level

SMA Female Bulkhead to UMCX Plug Cable 6 Inch Length Using 1.13mm Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female Bulkhead to UMCX Plug Cable 6 Inch Length Using 1.13mm Coax PE38297-6](#)

URL: <http://www.pasternack.com/sma-female-umcx-plug-1.13mm-cable-assembly-pe38297-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE38297-6 CAD Drawing

SMA Female Bulkhead to UMCX Plug Cable 6 Inch Length Using 1.13mm Coax

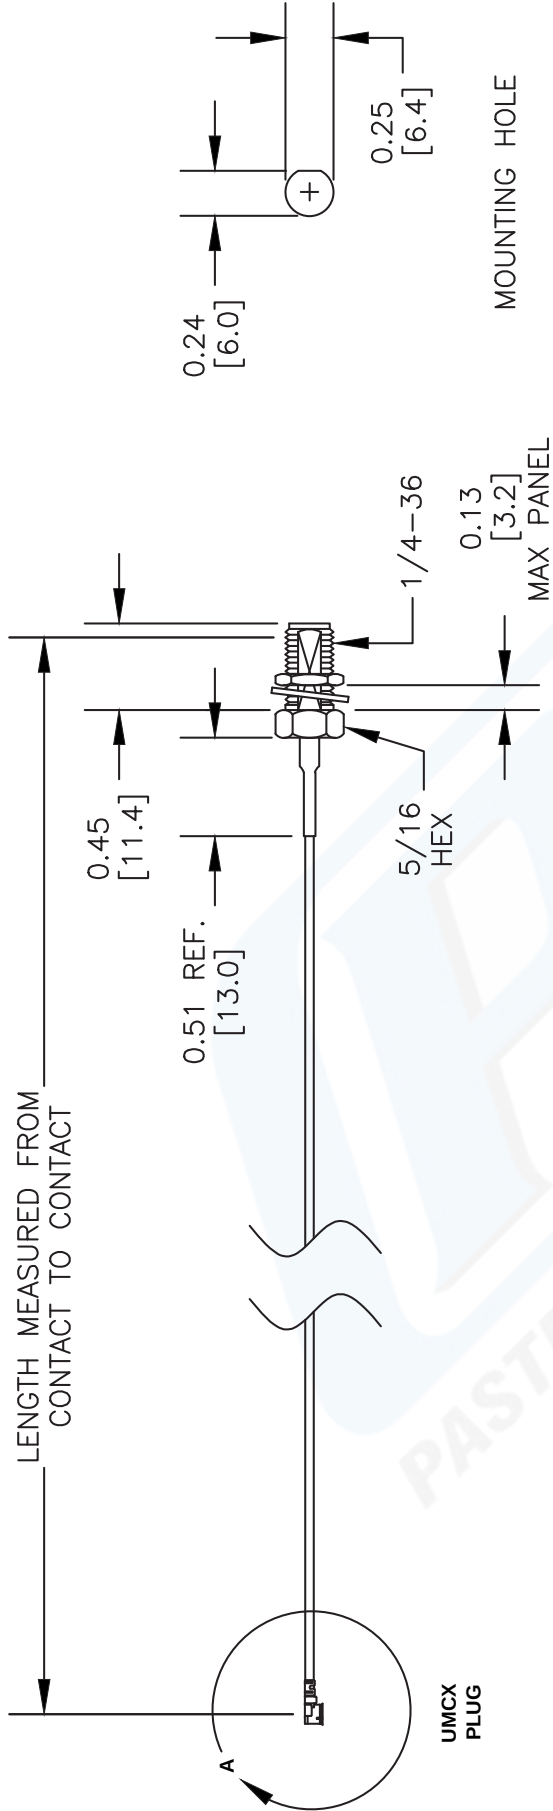

SMA FEMALE
BULKHEAD

MOUNTING HOLE

MAX PANEL

View A

UMCX connectors are similar to U.F.L.*
*U.F.L. is a Registered Trademark of
Hirose Electronic Group

How To Order						
Part Number Configuration		Examples PE3000LF-100 PE3000-100 PE3000LF-100CM PE3000-100CM	Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
PE3 [zzz] [yy] - [xx] [uu]			-6	6"	-	-
LF = Lead Free < Blank > = Standard			-12	12"	-	-
CM = Centimeters < Blank > = Inches			-18	18"	-	-
Length			-XX	Custom Length	-	-
00 - 99999			24" Max Length	-	-	
Note: LF applies only to RF cables				-xxCM	Custom Length	

PE PASTERNAK®

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE38297

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm]
4. LENGTH TOLERANCE IS ±1.5% OR 3/8", WHICHEVER IS GREATER.

REV. C FSCM NO. 53919 CAD FILE 040512 SCALE N/A SIZE A 2233