



7/16 DIN Male to 7/16 DIN Male Low PIM Cable
192 Inch Length Using 1/2 inch Superflexible Coax
with HeatShrink, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE39803-192

Configuration

- Connector 1: 7/16 DIN Male
- Connector 2: 7/16 DIN Male
- Cable Type: 1/2" Superflexible

Features

- 1/2" Flexible and 1/2" Superflexible cable
- 100% RF and PIM Tested
- Low Insertion Loss
- Low Return Loss at 2.7 GHz
- -160 dBc PIM Rating
- Velocity of Propagation at 82%

Applications


- General Purpose
- Laboratory Use
- Low PIM Applications

Description

Pasternack's corrugated cable assemblies are ideal for applications where durability and high power are needed. These high quality 50 ohm cable assemblies are constructed with a solid copper clad aluminum inner conductor, a foam dielectric, corrugated copper tube, and a tough polyethylene jacket. The solid inner and outer conductors are designed to help minimize intermodulation distortion (IMD) in communications applications. Durability is ensured thanks to the injection molded boot on the connectors for added strain relief. Our carefully selected assemblies provide the highest quality on the market with PIM ratings of -160 dBc and low return loss. Available in 1/2" flexible and 1/2" superflexible cable types in 7/16 DIN and type N connector configurations.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		2.7	GHz
Return Loss			-26	dB
Velocity of Propagation		82		%
Passive Intermodulation			-160	dBc
Capacitance		24.4 [80.05]		pF/ft [pF/m]
Inductance		0.06 [0.2]		uH/ft [uH/m]
DC Resistance Inner Conductor		0.92 [3.02]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		1.13 [3.71]		Ω/1000ft [Ω/Km]

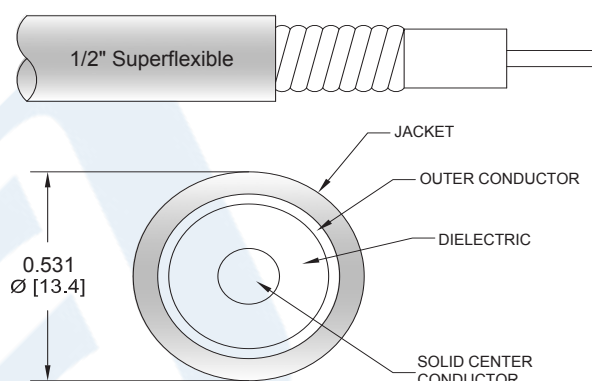

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to 7/16 DIN Male Low PIM Cable 192 Inch Length Using 1/2 inch Superflexible Coax with HeatShrink, LF Solder, RoHS PE39803-192](#)



7/16 DIN Male to 7/16 DIN Male Low PIM Cable
192 Inch Length Using 1/2 inch Superflexible Coax
with HeatShrink, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE39803-192

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2.2	2.7			GHz
Insertion Loss (Typ.)	0.512	0.8	0.896			dB
Return Loss (Max.)	-30	-28	-26			dB

Electrical Specification Notes:

Insertion loss does not include the loss of the connectors.

Insertion loss is estimated as $0.05 \times \sqrt{f(\text{GHz})}$ dB per connector.

Passive intermodulation is measured with two 20W tones.

Mechanical Specifications

Cable Assembly

Length*	192 in [487.68 cm]
Diameter	0.535 in [13.59 mm]
Weight	2.141 lbs [971.14 g]

Cable

Cable Type	1/2" Superflexible
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Aluminum
Dielectric Type	PE (F)
Outer Conductor Material and Plating	Helically Corrugated Copper Tube
Outer Conductor Diameter	0.484 in [12.29 mm]
Jacket Material	PE, Black
Jacket Diameter	0.531 in [13.49 mm]
One Time Minimum Bend Radius	0.59 in [14.99 mm]
Repeated Minimum Bend Radius	1.18 in [29.97 mm]
Typical Flex Cycles	20
Flat Plate Crush	85.6 lbs/in [1.53 Kg/mm]
Tensile Strength	225 lbs [102.06 Kg]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to 7/16 DIN Male Low PIM Cable 192 Inch Length Using 1/2 inch Superflexible Coax with HeatShrink, LF Solder, RoHS PE39803-192](#)



7/16 DIN Male to 7/16 DIN Male Low PIM Cable
192 Inch Length Using 1/2 inch Superflexible Coax
with HeatShrink, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE39803-192

Connectors

Description	Connector 1	Connector 2
Type	7/16 DIN Male	7/16 DIN Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Silver	Brass, Silver
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Hex Size	32 mm	32 mm
Torque	18.417 ft-lbs [24.97 Nm]	18.417 ft-lbs [24.97 Nm]

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8$ ", whichever is greater.

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to 7/16 DIN Male Low PIM Cable 192 Inch Length Using 1/2 inch Superflexible Coax with HeatShrink, LF Solder, RoHS PE39803-192](#)



7/16 DIN Male to 7/16 DIN Male Low PIM Cable
192 Inch Length Using 1/2 inch Superflexible Coax
with HeatShrink, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE39803-192

How to Order

Part Number Configuration:

PE39803

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE39803-12 = 12 inches long cable
PE39803-100cm = 100 cm long cable

7/16 DIN Male to 7/16 DIN Male Low PIM Cable 192 Inch Length Using 1/2 inch Superflexible Coax with HeatShrink, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [7/16 DIN Male to 7/16 DIN Male Low PIM Cable 192 Inch Length Using 1/2 inch Superflexible Coax with HeatShrink, LF Solder, RoHS PE39803-192](https://www.pasternack.com/7-16-MALE-7-16-MALE-1-2-Super-Flexible-Cable-PE39803-192-p.aspx)

URL: <https://www.pasternack.com/7-16-MALE-7-16-MALE-1-2-Super-Flexible-Cable-PE39803-192-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE39803-192 CAD Drawing

7/16 DIN Male to 7/16 DIN Male Low PIM Cable 192 Inch Length Using
1/2 inch Superflexible Coax with HeatShrink, LF Solder, RoHS

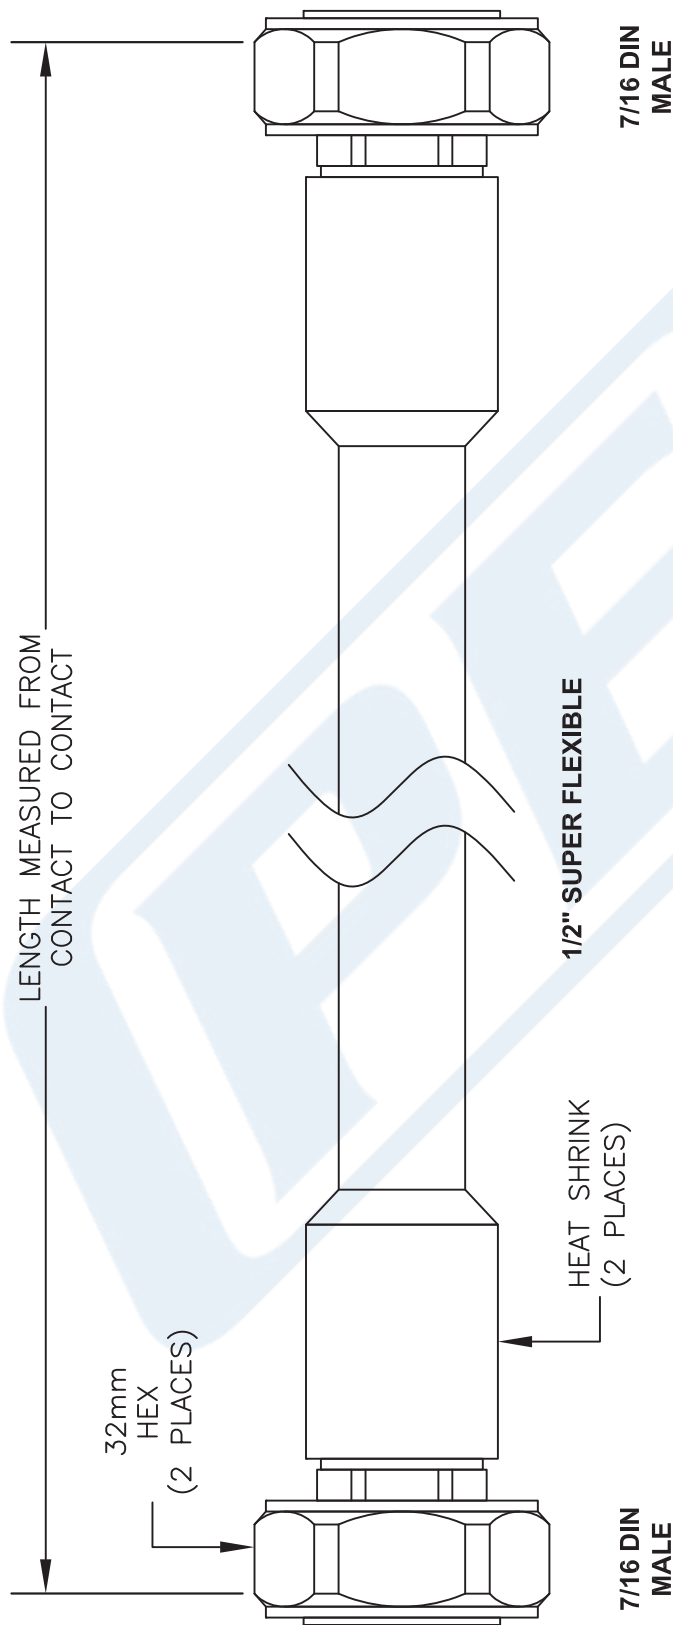

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.1
.XXX	±0.05

*STANDARD TOLERANCES APPLY
ONLY TO DIMENSIONS IN INCHES



PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
 P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE
PE39803

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919		CAD FILE	110916	SCALE	N/A	SIZE	A	41742
----------------	--	----------	--------	-------	-----	------	---	-------