



SMA Female to SMA Female Cable 60 Inch  
Length Using LMR-100 Coax

TECHNICAL DATA SHEET

PE3C0045-60

**SMA Female to SMA Female Cable 60 Inch Length Using LMR-100 Coax**

**Configuration**

Connector 1	SMA Female
Connector 1 Specification	MIL-STD-348
Connector 2	SMA Female
Connector 2 Specification	MIL-STD-348
Cable Type	LMR-100A
Impedance, Ohms	50

**Mechanical Specifications**

**Cable Assembly**

Cable Type	LMR-100A
------------	----------

**Temperature**

Temperature Operating Range, deg C	-40 to +85
Temperature Storage Range, deg C	-70 to +85

**Size**

Length, in [cm]	60 [152.4]
Diameter, in [mm]	0.312 [7.92]
Weight, lbs [g]	0.04 [18.14]
Cable Color	Black
One Time Minimum Bend Radius, in [mm]	0.25 [6.35]
Repeated Minimum Bend Radius, in [mm]	1 [25.4]

**Cable**

No of Shields	2
Dielectric Type	PE
Jacket Material	PVC
Jacket Diameter, in [mm]	0.11 [2.79]

**Connector 1**

Type	SMA Female
Configuration	Straight
Mating Cycles	100
Inner Conductor Material and Plating	Beryllium Copper, Gold
Body Material and Plating	Brass, Nickel
Dielectric Type	Teflon

**Connector 2**

Type	SMA Female
Configuration	Straight
Mating Cycles	100

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to SMA Female Cable 60 Inch Length Using LMR-100 Coax PE3C0045-60](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



SMA Female to SMA Female Cable 60 Inch  
Length Using LMR-100 Coax

TECHNICAL DATA SHEET

PE3C0045-60

Inner Conductor Material and Plating  
Body Material and Plating  
Dielectric Type

Beryllium Copper, Gold  
Brass, Nickel  
Teflon

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

SMA Female to SMA Female Cable 60 Inch Length Using LMR-100 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Female to SMA Female Cable 60 Inch Length Using LMR-100 Coax PE3C0045-60](http://www.pasternack.com/sma-female-sma-female-lmr100-cable-assembly-pe3c0045-60-p.aspx)

URL: <http://www.pasternack.com/sma-female-sma-female-lmr100-cable-assembly-pe3c0045-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

# PE3C0045-60 CAD Drawing

SMA Female to SMA Female Cable 60 Inch Length Using LMR-100 Coax

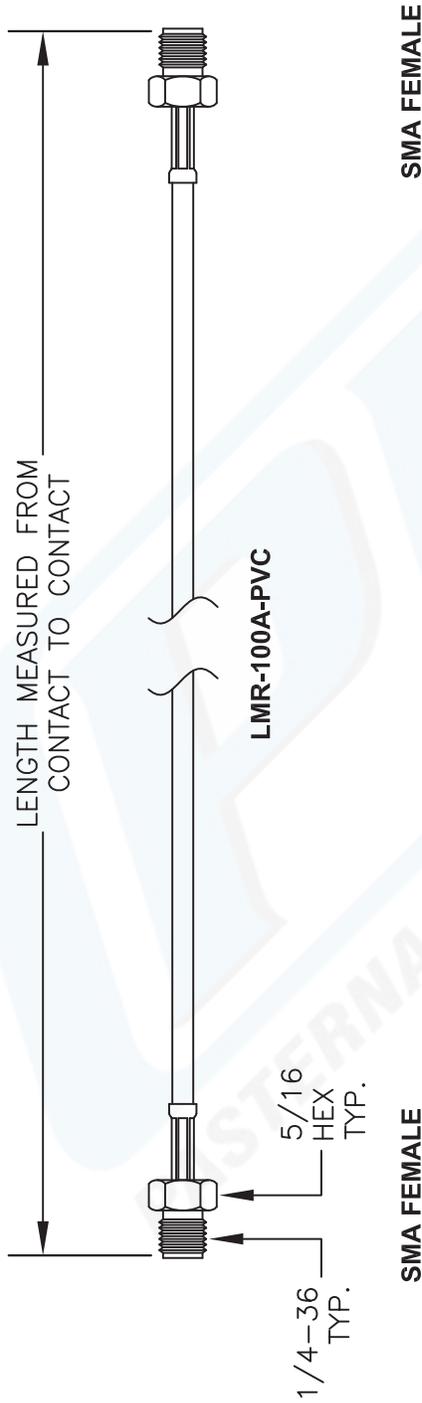

How To Order		Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
<b>Part Number Configuration</b> PE3 [zzz] [yy] - [xx] [uu] 00 - 99999 ————— LF = RoHS Compliant < Blank > = Standard Note: LF applies only to RF cables		-12	12"	-25CM	25Cm
Examples PE3000LF-100 PE3000-100 PE3000LF-100CM PE3000-100CM CM = Centimeters < Blank > = Inches _____ Length		-24	24"	-50CM	50Cm
		-36	36"	-75CM	75Cm
		-48	48"	-100CM	100Cm
		-60	60"	-125CM	125Cm
		-xx	Custom Length	-xxCM	Custom Length

**PE3C0045**

Notes:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].  
 4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

DWG TITLE: **PE3C0045**

FSCM NO. 53919

CAD FILE 013113

SCALE N/A

SIZE A

2233

---

**PE PASTERNAK®**  
 Pasternack Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623  
 Phone: (949) 261-1920 | Fax: (949) 261-7451  
 Website: www.pasternack.com | E-Mail: sales@pasternack.com