



2.92mm Male to 2.92mm Male Cable 12 Inch
Length Using PE-SR405FL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C1377LF-12

Configuration

- Connector 1: 2.92mm Male
- Connector 2: 2.92mm Male
- Cable Type: PE-SR405FL

Features

- Max Frequency 40 GHz
- 69.5% Phase Velocity


Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C1377LF-12 2.92mm male to 2.92mm male 12 inch cable using PE-SR405FL coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack 2.92mm to 2.92mm cable assembly has a male to male gender configuration with 50 ohm formable PE-SR405FL coax. The PE3C1377LF-12 2.92mm male to 2.92mm male cable assembly operates to 40 GHz.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

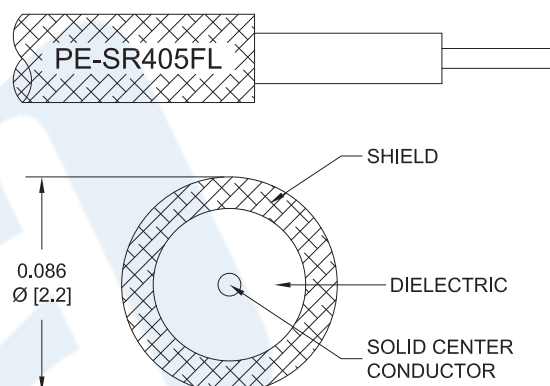

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Cable 12 Inch Length Using PE-SR405FL Coax, RoHS PE3C1377LF-12](#)



2.92mm Male to 2.92mm Male Cable 12 Inch
Length Using PE-SR405FL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C1377LF-12

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		40	GHz
VSWR			1.4:1	
Return Loss			-15.563	dB
Velocity of Propagation		69.5		%
Capacitance		29 [95.14]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	5	10	20		GHz
Insertion Loss (Typ.)	0.43	0.75	1.04	1.54		dB

Mechanical Specifications

Cable Assembly

Length*	12 in [304.8 mm]
Diameter	0.312 in [7.92 mm]
Weight	0.038 lbs [17.24 g]

Cable

Cable Type	PE-SR405FL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Outer Conductor Diameter	0.086 in [2.18 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Cable 12 Inch Length Using PE-SR405FL Coax, RoHS PE3C1377LF-12](#)



2.92mm Male to 2.92mm Male Cable 12 Inch
Length Using PE-SR405FL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C1377LF-12

Connectors

Description	Connector 1	Connector 2
Type	2.92mm Male	2.92mm Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper
Contact Plating Specification	50μ in. minimum	50μ in. minimum
Dielectric Type	Ultem 1000	Ultem 1000
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Body Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Coupling Nut Plating Specification	SAE-AMS-2700	SAE-AMS-2700
Hex Size	5/16 Inch	5/16 Inch

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Cable 12 Inch Length Using PE-SR405FL Coax, RoHS PE3C1377LF-12](#)




2.92mm Male to 2.92mm Male Cable 12 Inch
Length Using PE-SR405FL Coax, RoHS

RF Cable Assemblies Technical Data Sheet


PE3C1377LF-12

Typical Performance Data

PE3C1377-36 VSWR

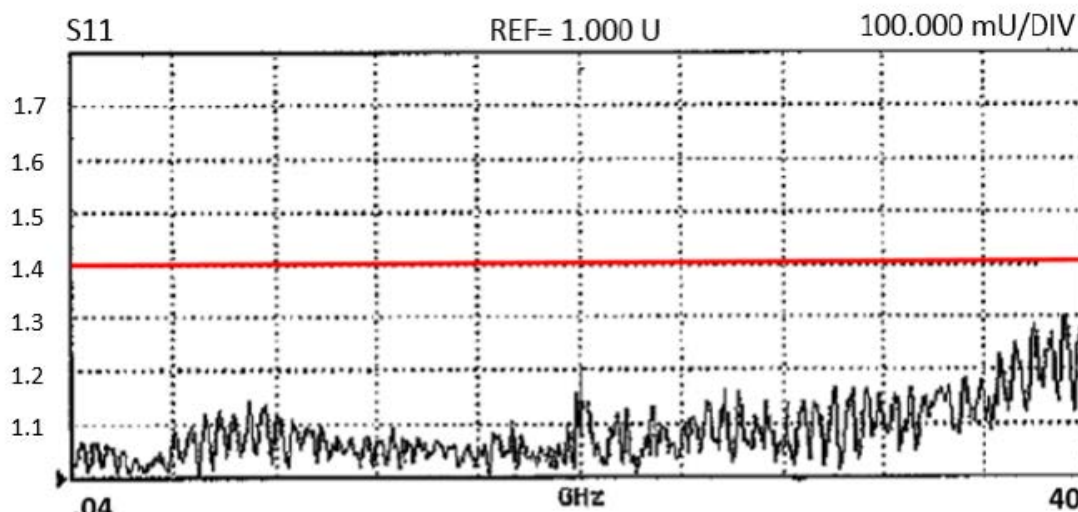

PE3C1377-36 Insertion Loss (dB)

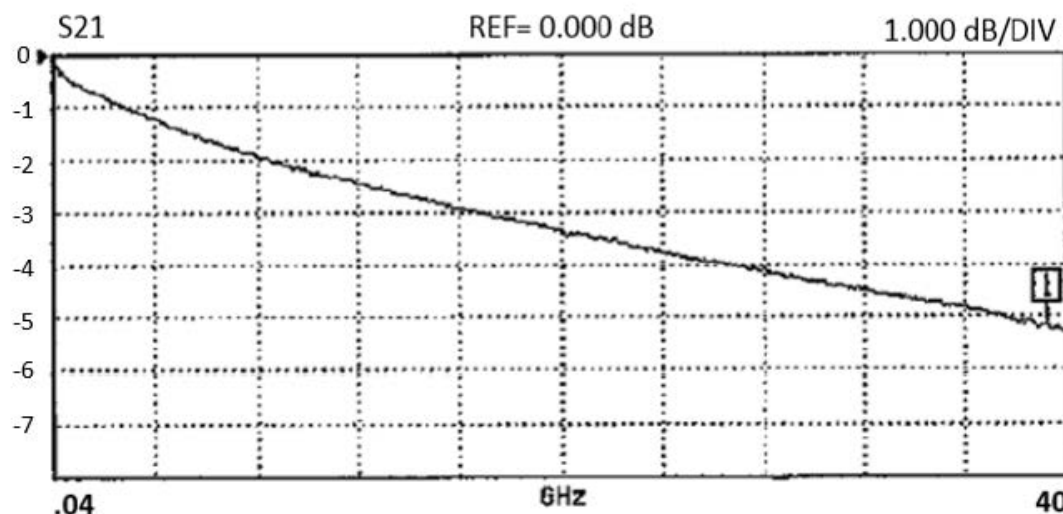

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Cable 12 Inch Length Using PE-SR405FL Coax, RoHS PE3C1377LF-12](#)



2.92mm Male to 2.92mm Male Cable 12 Inch
Length Using PE-SR405FL Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3C1377LF-12

How to Order

Part Number Configuration:

PE3C1377LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C1377LF-12 = 12 inches long cable
PE3C1377LF-100cm = 100 cm long cable

2.92mm Male to 2.92mm Male Cable 12 Inch Length Using PE-SR405FL Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.92mm Male to 2.92mm Male Cable 12 Inch Length Using PE-SR405FL Coax, RoHS PE3C1377LF-12](https://www.pasternack.com/2.92mm-male-2.92mm-male-pe-sr405fl-cable-assembly-pe3c1377lf-12-p.aspx)


URL: <https://www.pasternack.com/2.92mm-male-2.92mm-male-pe-sr405fl-cable-assembly-pe3c1377lf-12-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C1377LF-12 CAD Drawing

2.92mm Male to 2.92mm Male Cable 12 Inch Length Using PE-SR405FL Coax, RoHS

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	PCR PE3C1377LF	3/16/2021	SELLIS

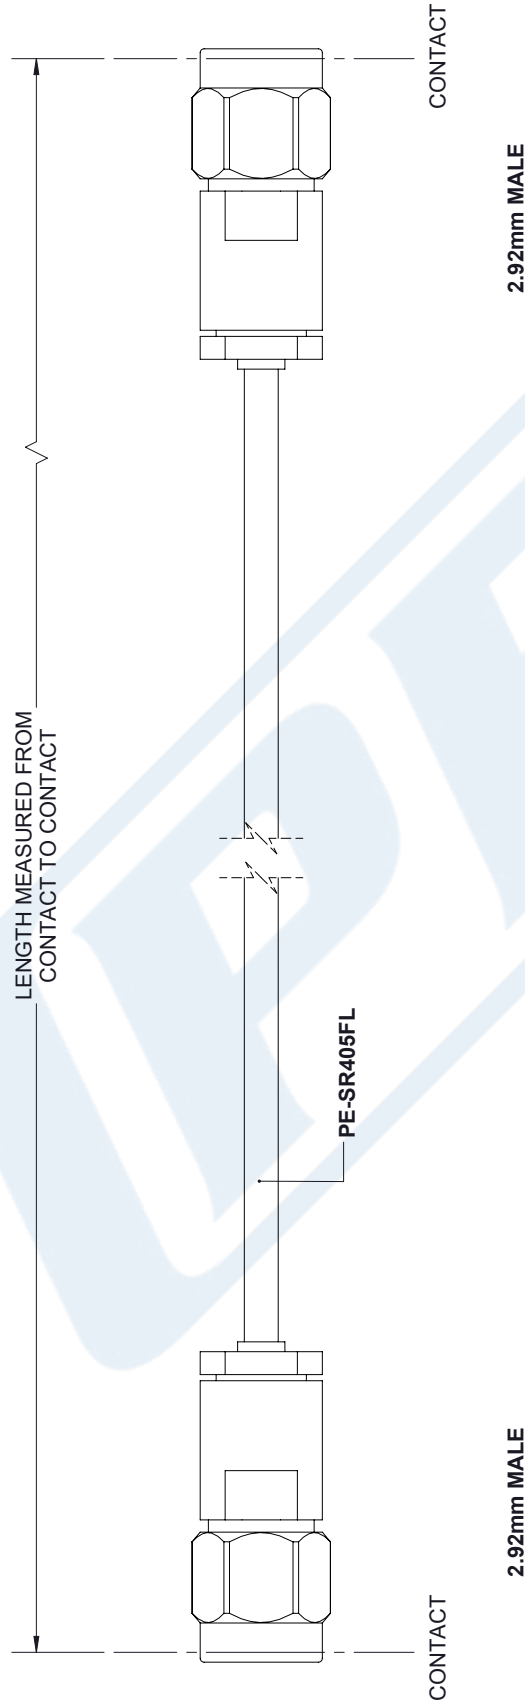

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

.X = ± .2	[.08]	FRACTIONS	± 1/32
.XX = ± .02	[.51]	ANGLES ± 1°	
.XXX = ± .005	[.13]		

CABLE LENGTH (L) TOLERANCES:

L ≤ 12 [305]	= +1 [25] / -0
12 [305] < L ≤ 60 [1524]	= +2 [51] / -0
60 [1524] < L ≤ 120 [3048]	= +4 [102] / -0
120 [3048] < L ≤ 300 [7620]	= +6 [152] / -0
300 [7620] < L	= +5% L / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

PASTERNAK®
an INFINITI® brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

SIZE	CAGE CODE	DRAWN BY	ITEM NO.
A	53919	K.DANG	PE3C1377LF
REV			A

THIRD-ANGLE PROJECTION

THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET	1	OF	1
SCALE	N/A		

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.