

Push-On SMP Female Right Angle to Push-On
SMP Female Right Angle Cable 200 cm Length
Using RG316 Coax with 180 Deg. Clock



RF Cable Assemblies Technical Data Sheet

PE3C3584/PH180-200CM

Configuration

- Connector 1: Push-OnSMP Female Right Angle
- Connector 2: Push-OnSMP Female Right Angle
- Cable Type: RG316

Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C3584/PH180-200CM SMP female push-on right angle to SMP female push-on right angle 200 cm cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMP to SMP cable assembly has a female to female gender configuration with 50 ohm flexible RG316 coax. The PE3C3584/PH180-200CM SMP female to SMP female cable assembly operates to 3 GHz. The right angle SMP interfaces on the RG316 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable 200 cm Length Using RG316 Coax with 180 Deg. Clock PE3C3584/PH180-200CM](#)

Push-On SMP Female Right Angle to Push-On
 SMP Female Right Angle Cable 200 cm Length
 Using RG316 Coax with 180 Deg. Clock



RF Cable Assemblies Technical Data Sheet

PE3C3584/PH180-200CM

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69		%
Operating Voltage (AC)			350	Vrms
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	1.12	1.25	1.52	2.9	4.2	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. Insertion Loss is estimated as 0.2 dB per connector.

Mechanical Specifications

Cable Assembly

Length*	78.74 in [200 cm]
Diameter	0.157 in [3.99 mm]

Cable

Cable Type	RG316
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.102 in [2.59 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable 200 cm Length Using RG316 Coax with 180 Deg. Clock PE3C3584/PH180-200CM](#)

Push-On SMP Female Right Angle to Push-On
SMP Female Right Angle Cable 200 cm Length
Using RG316 Coax with 180 Deg. Clock



RF Cable Assemblies Technical Data Sheet

PE3C3584/PH180-200CM

Connectors

Description	Connector 1	Connector 2
Type	SMP Female Right Angle	SMP Female Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Connection Method	Push-On	Push-On
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	30μ in. minimum	30μ in. minimum
Dielectric Type	Teflon	Teflon
Outer Conductor Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Outer Conductor Plating Specification	3μ in. minimum	3μ in. minimum
Body Material and Plating	Brass, Gold	Brass, Gold
Body Plating Specification	3μ in. minimum	3μ in. minimum

Environmental Specifications

Temperature

Operating Range -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable 200 cm Length Using RG316 Coax with 180 Deg. Clock PE3C3584/PH180-200CM](#)

Push-On SMP Female Right Angle to Push-On
SMP Female Right Angle Cable 200 cm Length
Using RG316 Coax with 180 Deg. Clock



RF Cable Assemblies Technical Data Sheet

PE3C3584/PH180-200CM

How to Order

Part Number Configuration:

PE3C3584/PH180

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C3584/PH180-12 = 12 inches long cable
PE3C3584/PH180-100cm = 100 cm long cable

Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable 200 cm Length Using RG316 Coax with 180 Deg. Clock from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable 200 cm Length Using RG316 Coax with 180 Deg. Clock PE3C3584/PH180-200CM](#)

URL:


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C3584/PH180-200CM CAD Drawing

Push-On SMP Female Right Angle to Push-On SMP Female Right Angle
Cable 200 cm Length Using RG316 Coax with 180 Deg. Clock

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	8/25/2020	S.ELLIS

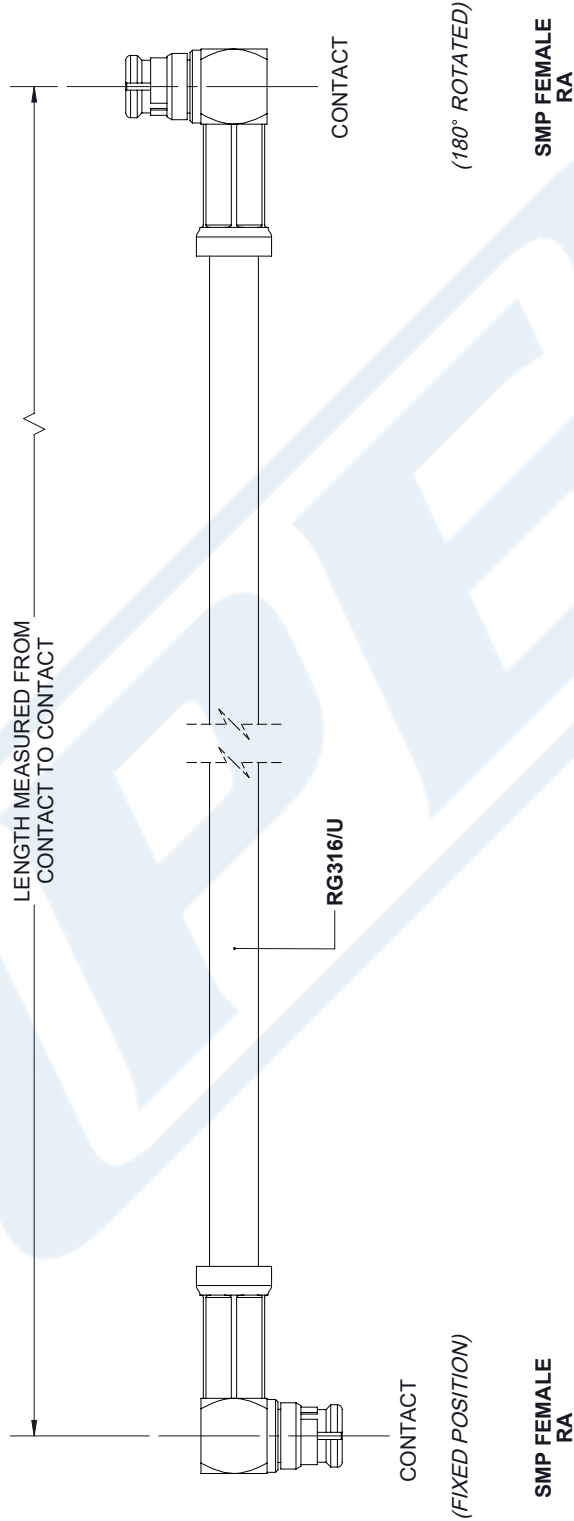

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

$X = \pm .2$	[.08]	FRACTIONS	$\pm 1/32$
$.XX = \pm .02$	[.51]	ANGLES	$\pm 1^\circ$
$.XXX = \pm .005$	[.13]	CABLE LENGTH (L) TOLERANCES:	
		$L \leq 12$ [305]	$= +1 [25] / -0$
		$12 [305] < L \leq 60$ [1524]	$= +2 [51] / -0$
		$60 [1524] < L \leq 120$ [3048]	$= +4 [102] / -0$
		$120 [3048] < L \leq 300$ [7620]	$= +6 [152] / -0$
		$300 [7620] < L = +5\%$	$/ -0$
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.			



Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com



THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET 1 OF 1
SCALE N/A

SIZE	CAGE CODE	DRAWN BY	ITEM NO.	REV
A	53919	K.DANG	PE3C3584/PH180	A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.