

Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable 48 Inch Length Using RG316 Coax with 180 Deg. Clock



RF Cable Assemblies Technical Data Sheet



PE3C3584/PH180-48

Configuration

- Connector 1: Push-OnSMP Female Right Angle
- Connector 2: Push-OnSMP Female Right Angle
- Cable Type: RG316

Features

- Max Frequency 3 GHz
- 69% Phase Velocity
- FEP Jacket

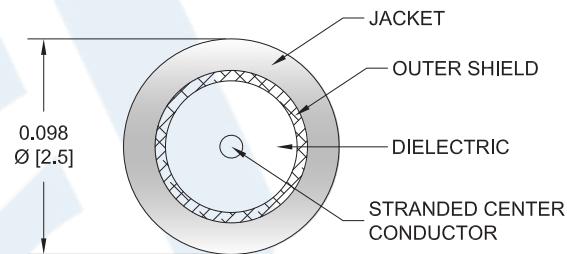

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C3584/PH180-48 SMP female push-on right angle to SMP female push-on right angle 48 inch cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack SMP to SMP cable assembly has a female to female gender configuration with 50 ohm flexible RG316 coax. The PE3C3584/PH180-48 SMP female to SMP female cable assembly operates to 3 GHz. The right angle SMP interfaces on the RG316 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable 48 Inch Length Using RG316 Coax with 180 Deg. Clock PE3C3584/PH180-48](#)

Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable 48 Inch Length Using RG316 Coax with 180 Deg. Clock



RF Cable Assemblies Technical Data Sheet

PE3C3584/PH180-48

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.4:1	
Velocity of Propagation		69		%
Operating Voltage (AC)			350	Vrms
Jacket Spark			2,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	0.84	0.92	1.08	1.92	2.72	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. Insertion Loss is estimated as 0.2 dB per connector.

Mechanical Specifications

Cable Assembly

Length*
Diameter

48 in [121.92 cm]
0.157 in [3.99 mm]

Cable

Cable Type
Impedance
Inner Conductor Type
Inner Conductor Material and Plating
Dielectric Type
Number of Shields
Shield Layer 1
Jacket Material
Jacket Diameter

RG316
50 Ohms
Stranded
Copper Clad Steel, Silver
PTFE
1
Silver Plated Copper Braid
FEP, Tan
0.102 in [2.59 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable 48 Inch Length Using RG316 Coax with 180 Deg. Clock PE3C3584/PH180-48](#)

Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable 48 Inch Length Using RG316 Coax with 180 Deg. Clock



RF Cable Assemblies Technical Data Sheet

PE3C3584/PH180-48

Connectors

Description	Connector 1	Connector 2
Type	SMP Female Right Angle	SMP Female Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Connection Method	Push-On	Push-On
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	30 μ in. minimum	30 μ in. minimum
Dielectric Type	Teflon	Teflon
Outer Conductor Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Outer Conductor Plating Specification	3 μ in. minimum	3 μ in. minimum
Body Material and Plating	Brass, Gold	Brass, Gold
Body Plating Specification	3 μ in. minimum	3 μ in. minimum

Environmental Specifications

Temperature

Operating Range

-55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable 48 Inch Length Using RG316 Coax with 180 Deg. Clock PE3C3584/PH180-48](#)

Push-On SMP Female Right Angle to Push-On
SMP Female Right Angle Cable 48 Inch Length
Using RG316 Coax with 180 Deg. Clock



RF Cable Assemblies Technical Data Sheet

PE3C3584/PH180-48

How to Order

Part Number Configuration:

PE3C3584/PH180

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C3584/PH180-12 = 12 inches long cable
PE3C3584/PH180-100cm = 100 cm long cable

Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable 48 Inch Length Using RG316 Coax with 180 Deg. Clock from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female Right Angle to Push-On SMP Female Right Angle Cable 48 Inch Length Using RG316 Coax with 180 Deg. Clock PE3C3584/PH180-48](#)

URL:

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C3584/PH180-48 CAD Drawing

Push-On SMP Female Right Angle to Push-On SMP Female Right Angle
Cable 48 Inch Length Using RG316 Coax with 180 Deg. Clock

