



## SSMC Plug Right Angle to SSMC Jack Bulkhead Cable 24 Inch Length Using PE-SR405FLJ Coax

### RF Cable Assemblies Technical Data Sheet


PE3C4483-24

#### Configuration

- Connector 1: SSMC Plug Right Angle
- Connector 2: SSMC Jack Bulkhead
- Cable Type: PE-SR405FLJ

#### Features

- SSMC Cable Assembly Max. Operating Frequency of 12.4 GHz
- Small SSMC cable connection form factor (50% smaller than SMA, radially)
- Reliable threaded coupling
- In stock and ready to ship

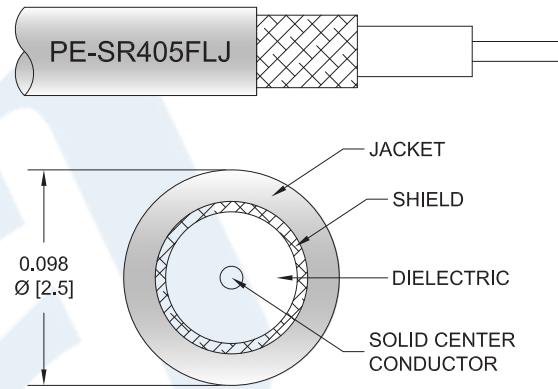

#### Applications

- SSMC Cable General Purpose Test
- Data Acquisition Systems
- A/D Conversion Systems
- Ultra Wideband Digital Receivers
- Software defined radio (SDR)

#### Description

Pasternack's SSMC cable assemblies are part of our full line of RF components available for same-day shipping. These SSMC cable assemblies are designed to connect SSMC system components and test connections, delivering signal frequencies as high as 12.4 GHz. Our family of SSMC cables can also be used to connect SSMC ports on data acquisition systems, A/D modules or SSMC coax patch panels. If none of our standard options fit your application, you can specify your own custom SSMC cable assembly using Pasternack's online Cable Creator.

Our SSMC cable assembly datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave cable assemblies allow designers to configure and customize their signal connections however they like. Whether the need is to provide SSMC cabling for a data acquisition system, or simply create a custom cable assembly configuration, Pasternack has the right cable assemblies for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same day.

#### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
VSWR			1.5:1	
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		10.2 [33.46]		Ω/1000ft [Ω/Km]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMC Plug Right Angle to SSMC Jack Bulkhead Cable 24 Inch Length Using PE-SR405FLJ Coax PE3C4483-24](#)



## SSMC Plug Right Angle to SSMC Jack Bulkhead Cable 24 Inch Length Using PE-SR405FLJ Coax

### RF Cable Assemblies Technical Data Sheet

PE3C4483-24

Operating Voltage (AC)	250	Vrms
------------------------	-----	------

#### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	5	10	12.4	GHz
Insertion Loss (Max.)	0.5	0.65	1.3	1.83	2.02	dB

#### Mechanical Specifications

##### Cable Assembly

Length\*  
Diameter

24 in [609.6 mm]  
0.156 in [3.96 mm]

##### Cable

Cable Type  
Impedance  
Inner Conductor Type  
Inner Conductor Material and Plating  
Dielectric Type  
Number of Shields  
Outer Conductor Material and Plating  
Jacket Material  
Jacket Diameter

PE-SR405FLJ  
50 Ohms  
Solid  
Copper Clad Steel, Silver  
PTFE  
1  
Tinned Copper Composite Braid  
FEP, Black  
0.105 in [2.67 mm]

One Time Minimum Bend Radius  
Repeated Minimum Bend Radius

0.5 in [12.7 mm]  
0.787 in [19.99 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMC Plug Right Angle to SSMC Jack Bulkhead Cable 24 Inch Length Using PE-SR405FLJ Coax PE3C4483-24](#)



## SSMC Plug Right Angle to SSMC Jack Bulkhead Cable 24 Inch Length Using PE-SR405FLJ Coax

### RF Cable Assemblies Technical Data Sheet

PE3C4483-24

#### Connectors

Description	Connector 1	Connector 2
Type	SSMC Plug Right Angle	SSMC Jack Bulkhead
Impedance	50 Ohms	50 Ohms
Mating Cycles	500	500
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	MIL-G-45204	MIL-G-45204
Dielectric Type	Teflon	Teflon
Outer Conductor Material and Plating		Beryllium Copper, Gold
Outer Conductor Plating Specification		MIL-G-45204
Body Material and Plating	Brass, Gold	Beryllium Copper, Gold
Body Plating Specification	MIL-G-45204	MIL-G-45204
Coupling Nut Material and Plating	Beryllium Copper, Gold	
Coupling Nut Plating Specification	MIL-G-45204	
Torque	1.75 in-lbs [0.2 Nm]	1.75 in-lbs [0.2 Nm]

#### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

#### Environmental Specifications

##### Temperature

Operating Range

-55 to +125 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMC Plug Right Angle to SSMC Jack Bulkhead Cable 24 Inch Length Using PE-SR405FLJ Coax PE3C4483-24](#)



## SSMC Plug Right Angle to SSMC Jack Bulkhead Cable 24 Inch Length Using PE-SR405FLJ Coax

### RF Cable Assemblies Technical Data Sheet

PE3C4483-24

#### How to Order

Part Number Configuration:

**PE3C4483**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3C4483-12 = 12 inches long cable  
PE3C4483-100cm = 100 cm long cable


SSMC Plug Right Angle to SSMC Jack Bulkhead Cable 24 Inch Length Using PE-SR405FLJ Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SSMC Plug Right Angle to SSMC Jack Bulkhead Cable 24 Inch Length Using PE-SR405FLJ Coax PE3C4483-24](https://www.pasternack.com/ssmc-plug-ssmc-jack-pe-sr405flj-cable-assembly-pe3c4483-24-p.aspx)

URL: <https://www.pasternack.com/ssmc-plug-ssmc-jack-pe-sr405flj-cable-assembly-pe3c4483-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3C4483-24 CAD Drawing**  
 SSMC Plug Right Angle to SSMC Jack Bulkhead Cable  
 24 Inch Length Using PE-SR405FLJ Coax

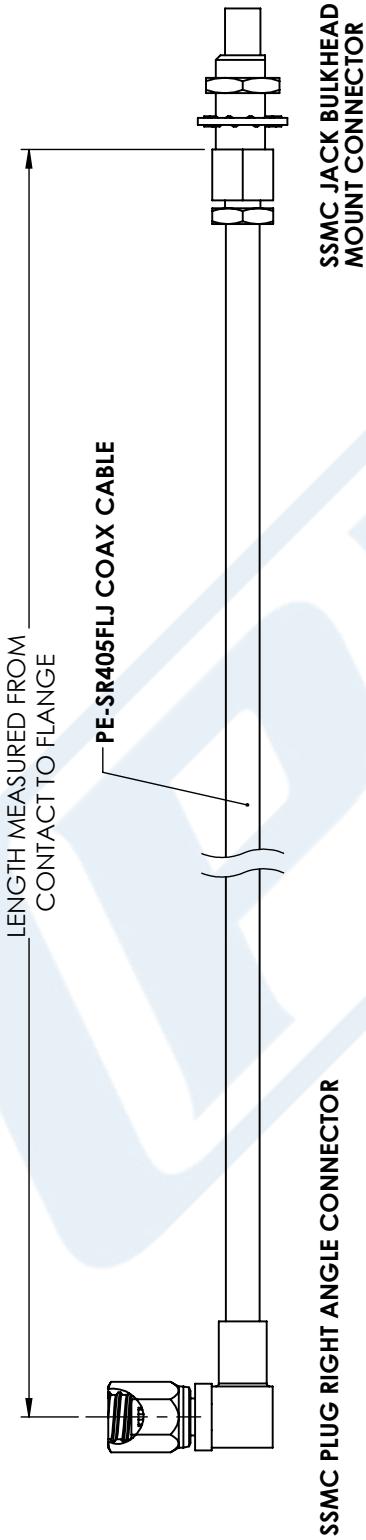

STANDARD TOLERANCES	
X	±0.2
.XX	±0.01
.XXX	±0.005

ONLY TO DIMENSIONS IN INCHES

**PE PASTERNACK®**  
 THE ENGINEER'S RF SOURCE

Pasterнак Enterprises, Inc.  
 P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: [www.pasterнак.com](http://www.pasterнак.com) | E-Mail: [sales@pasterнак.com](mailto:sales@pasterнак.com)

NOTES:  
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE	CAGE CODE	CAD FILE	SCALE	SIZE	REV
PE3C4483	53919	09/07/17	N/A	A	CN2245