



Plenum 4.1/9.5 Mini DIN Male Right Angle to
4.3-10 Female Low PIM Cable 50 cm Length Using
SPP-250-LLPL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C5950-50CM

Configuration

- Connector 1: 4.1/9.5 Mini DIN Male Right Angle
- Connector 2: 4.3-10 Female
- Cable Type: SPP-250-LLPL

Features

- Max Frequency 5.8 GHz
- Low PIM: -160 dBc Max
- Shielding Effectivity > 100 dB
- 76% Phase Velocity
- FEP Jacket
- 100% Tested with PIM Test Results Marked on Cable
- UL910 Plenum Rated Cable
- Lightweight and Extremely Flexible
- Low Loss with Excellent VSWR
- IP67 (when mated)


Applications

- General Purpose
- Laboratory Use
- Low PIM Applications
- Distributed Antenna Systems (DAS)
- Plenum Installations
- Multi-Carrier Communication Systems
- PIM Testing

Description

Pasternack's PE3C5950-50CM 4.1/9.5 Mini DIN male right angle to 4.3-10 female 50 cm cable using SPP-250-LLPL coax is part of our full line of RF components available for same-day shipping. Pasternack's corrugated RF cable assemblies are ideal for applications where durability and high power are needed. This Pasternack 4.1/9.5 Mini DIN to 4.3-10 cable assembly has a male to female gender configuration with 50 ohm corrugated SPP-250-LLPL coax. The PE3C5950-50CM 4.1/9.5 Mini DIN male to 4.3-10 female cable assembly operates to 5.8 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -160 dBc. The right angle 4.1/9.5 Mini DIN interface on the SPP-250-LLPL cable allows for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

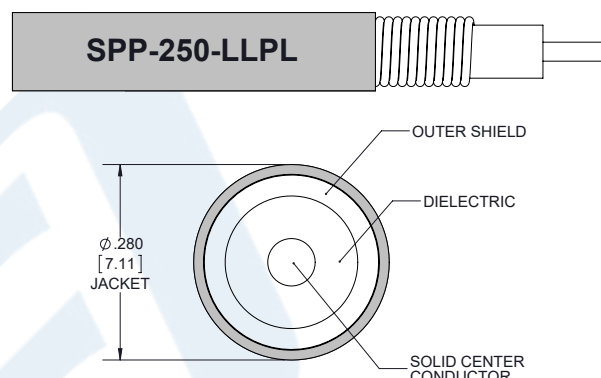

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum 4.1/9.5 Mini DIN Male Right Angle to 4.3-10 Female Low PIM Cable 50 cm Length Using SPP-250-LLPL Coax , LF Solder PE3C5950-50CM](#)



Plenum 4.1/9.5 Mini DIN Male Right Angle to
4.3-10 Female Low PIM Cable 50 cm Length Using
SPP-250-LLPL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C5950-50CM

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.4:1	
Velocity of Propagation		76		%
RF Shielding	100			dB
Passive Intermodulation			-160	dBc
Capacitance		27 [88.58]		pF/ft [pF/m]
Inductance		0.067 [0.22]		uH/ft [uH/m]
DC Resistance Inner Conductor		3 [9.84]		Ω/1000ft [Ω/Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Max.)	0.07	0.12	0.17	0.28	0.44	dB

Electrical Specification Notes:

The insertion loss data above is based on the performance specifications of the coax cable used in this assembly. The insertion loss includes an estimated insertion loss of 0.04*SQRT(FGHz) dB maximum per connector.

Mechanical Specifications

Cable Assembly

Length* 19.685 in [500 mm]

Cable

Cable Type SPP-250-LLPL
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper
Dielectric Type PTFE
Number of Shields 1
Outer Conductor Material and Plating Copper
Jacket Material FEP, Blue
Jacket Diameter 0.28 in [7.11 mm]

One Time Minimum Bend Radius 1.25 in [31.75 mm]
Bending Moment 0.8 lbs-ft [1.08 N-m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum 4.1/9.5 Mini DIN Male Right Angle to 4.3-10 Female Low PIM Cable 50 cm Length Using SPP-250-LLPL Coax , LF Solder PE3C5950-50CM](#)



Plenum 4.1/9.5 Mini DIN Male Right Angle to
4.3-10 Female Low PIM Cable 50 cm Length Using
SPP-250-LLPL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C5950-50CM

Connectors

Description	Connector 1	Connector 2
Type	4.1/9.5 Mini DIN Male Right Angle	4.3-10 Female
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Silver	Phosphor Bronze, Silver
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating		Phosphor Bronze, Tri-Metal
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating	Brass, Tri-Metal	

Mechanical Specification Notes:

*All cable assemblies have a length tolerance of 1.5% or $\pm 3/8"$, whichever is greater.

Environmental Specifications

Temperature

Operating Range -55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum 4.1/9.5 Mini DIN Male Right Angle to 4.3-10 Female Low PIM Cable 50 cm Length Using SPP-250-LLPL Coax , LF Solder PE3C5950-50CM](#)



Plenum 4.1/9.5 Mini DIN Male Right Angle to
4.3-10 Female Low PIM Cable 50 cm Length Using
SPP-250-LLPL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C5950-50CM

Typical Performance Data



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum 4.1/9.5 Mini DIN Male Right Angle to 4.3-10 Female Low PIM Cable 50 cm Length Using SPP-250-LLPL Coax , LF Solder PE3C5950-50CM](#)



Plenum 4.1/9.5 Mini DIN Male Right Angle to
4.3-10 Female Low PIM Cable 50 cm Length Using
SPP-250-LLPL Coax , LF Solder

RF Cable Assemblies Technical Data Sheet

PE3C5950-50CM

How to Order

Part Number Configuration:

PE3C5950

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C5950-12 = 12 inches long cable
PE3C5950-100cm = 100 cm long cable

Plenum 4.1/9.5 Mini DIN Male Right Angle to 4.3-10 Female Low PIM Cable 50 cm Length Using SPP-250-LLPL Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum 4.1/9.5 Mini DIN Male Right Angle to 4.3-10 Female Low PIM Cable 50 cm Length Using SPP-250-LLPL Coax , LF Solder PE3C5950-50CM](https://www.pasternack.com/4.1-9.5-mini-din-male-4.3-10-female-spp250llpl-cable-assembly-pe3c5950-50cm-p.aspx)

URL: <https://www.pasternack.com/4.1-9.5-mini-din-male-4.3-10-female-spp250llpl-cable-assembly-pe3c5950-50cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Plenum 4.1/9.5 Mini DIN Male Right Angle to 4.3-10 Female Low PIM
Cable 50 cm Length Using SPP-250-LLPL Coax , LF Solder

Technical drawing of a cable assembly. The drawing shows a cable with various components and labels. Key features include:

- Labels:**
 - PE LABEL:** Located on the left side of the cable.
 - PIM LABEL:** Located on the right side of the cable.
- Dimensions and Measurements:**
 - LENGTH MEASURED FROM CONTACT TO END:** Indicated by a dimension line at the top.
 - 6" FROM CABLE END 1 PLACE:** Dimension from the left end to the PIM label.
 - 6" FROM CABLE END 1 PLACE:** Dimension from the right end to the PIM label.
 - 750 [19.0] HEX:** Dimension of the hexagonal part of the PIM label.
 - 866 [22.0] HEX:** Dimension of the hexagonal part of the contact.
- Components:**
 - HEAT SHRINK PROTECTOR (2X):** Two heat shrink protectors are shown on the cable.
 - SPP-250-LLPL:** A component labeled on the cable.
 - CONTACT:** The end of the cable assembly.
- Text and Markings:**
 - www.PASTERNAK.com PART #:** Text on the left side.
 - SERIAL # PIM LEVEL -zzzdBc:** Text on the right side.
 - 4.1 / 9.5 Mini:** Text at the bottom left.
 - 4.3-10 FEMALE:** Text at the bottom right.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.