



2.4mm Male to 2.4mm Male Right Angle Precision Cable 24 Inch Length Using High Flex VNA Test Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3TC0700-24

Configuration

- Connector 1: 2.4mm Male
- Connector 2: 2.4mm Male Right Angle
- Cable Type: PE-VNA-HF

Features

- Designed for use as VNA test port extenders
- Highly flexible armored cable construction
- 1.30:1 VSWR to 50 GHz
- Excellent amplitude and phase stability with flexure
- Non-conductive protective Nomex outer sleeve
- Each serialized assembly comes with test data
- In-stock and ready to ship same-day

Applications

- Vector Network analyzer test port extenders
- Semiconductor probe testing
- Lab and production testing
- Precise bench-top testing

Description

Pasternack high performance high flex VNA test cables are designed to provide customers repeatable and accurate VNA measurements. These Test cables have excellent electrical properties including low Insertion Loss, low VSWR and phase stability of $\pm 6^\circ$ with flexure. The braided stainless steel armoring provides a rugged, but flexible cable with a life exceeding 100,000 flex cycles. The rugged connectors provide up to 5,000 mating cycles when attached with proper care. The flexibility of these cables makes it easier and safer to test your Device Under Test (DUT). When used with the appropriate calibration kit, these test cables effectively extend the test port of the VNA allowing for accurate measurements of devices that cannot be directly connected to a network analyzer test port.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		50	GHz
VSWR			1.3:1	
Velocity of Propagation		78		%
RF Shielding	100			dB
Group Delay		1.34 [4.4]		ns/ft [ns/m]
Capacitance		25.9 [84.97]		pF/ft [pF/m]
Input Power (Average)			18	Watts
Phase Stability with Flexure		6		Degrees

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Male to 2.4mm Male Right Angle Precision Cable 24 Inch Length Using High Flex VNA Test Coax, RoHS PE3TC0700-24](#)



2.4mm Male to 2.4mm Male Right Angle Precision Cable 24 Inch Length Using High Flex VNA Test Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3TC0700-24

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	2.5	5	10	20	50	GHz
Insertion Loss (Max.)	1.1	1.36	1.76	2.4	3.7	dB
Power Handling (Max.)					18	Watts

Electrical Specification Notes:
Values at 25°C, sea level.

Mechanical Specifications

Cable Assembly

Length

24 in [609.6 mm]

Cable

Cable Type

PE-VNA-HF

Impedance

50 Ohms

Inner Conductor Type

Solid

Inner Conductor Material and Plating

Copper, Silver

Dielectric Type

PTFE

Number of Shields

3

Shield Layer 1

Silver Plated Copper Tape

Shield Layer 2

Silver Plated Copper Braid

Shield Layer 3

Silver Plated Copper Braid

Jacket Diameter

0.27 in [6.86 mm]

One Time Minimum Bend Radius

1 in [25.4 mm]

Flat Plate Crush

317 lbs/in [5.66 Kg/mm]

Connectors

Description	Connector 1	Connector 2
Type	2.4mm Male	2.4mm Male Right Angle
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Dielectric Type	ULTEM	ULTEM
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Torque	8 in-lbs [0.9 Nm]	8 in-lbs [0.9 Nm]
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Male to 2.4mm Male Right Angle Precision Cable 24 Inch Length Using High Flex VNA Test Coax, RoHS PE3TC0700-24](#)



2.4mm Male to 2.4mm Male Right Angle Precision Cable
24 Inch Length Using High Flex VNA Test Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3TC0700-24

Environmental Specifications

Temperature

Operating Range

-65 to +125 deg C

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

Yes

REACH Compliant

06/15/2015



Plotted and Other Data

Notes:


- Values at 25°C, sea level.

Typical Performance Data

PE3TC0700-24 VSWR

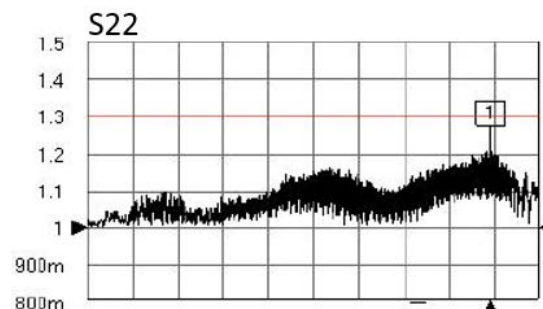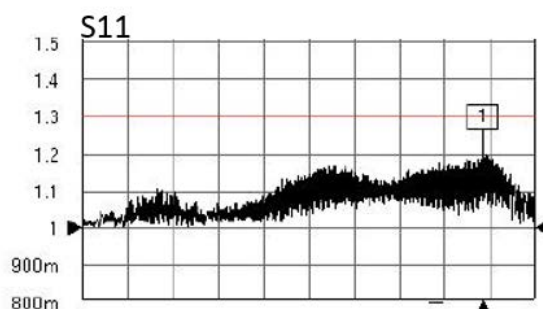

PE3TC0700-24 Insertion Loss (dB)

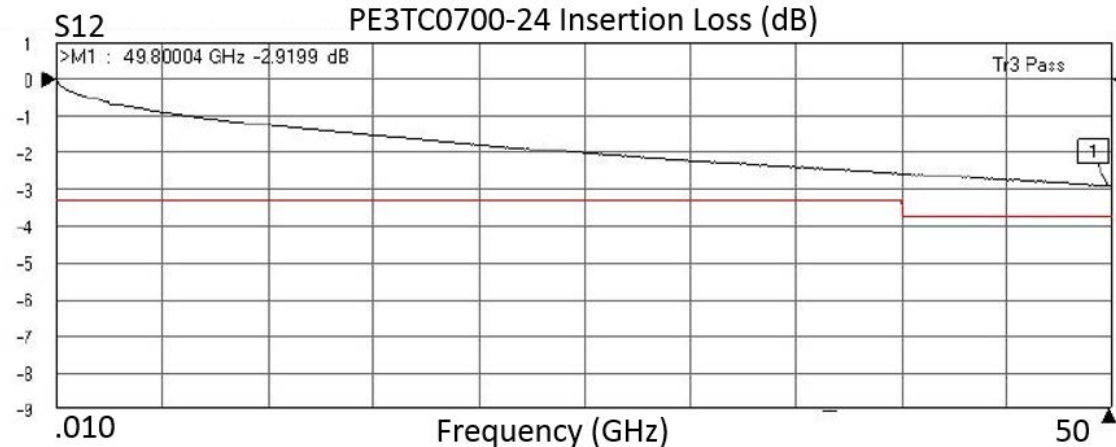

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Male to 2.4mm Male Right Angle Precision Cable 24 Inch Length Using High Flex VNA Test Coax, RoHS PE3TC0700-24](#)



2.4mm Male to 2.4mm Male Right Angle Precision Cable
24 Inch Length Using High Flex VNA Test Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE3TC0700-24

How to Order

Part Number Configuration:

PE3TC0700

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3TC0700-12 = 12 inches long cable
PE3TC0700-100cm = 100 cm long cable

2.4mm Male to 2.4mm Male Right Angle Precision Cable 24 Inch Length Using High Flex VNA Test Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4mm Male to 2.4mm Male Right Angle Precision Cable 24 Inch Length Using High Flex VNA Test Coax, RoHS PE3TC0700-24](http://www.pasternack.com/2.4mm-male-2.4mm-male-vna-cable-cable-assembly-pe3tc0700-24-p.aspx)

URL: <http://www.pasternack.com/2.4mm-male-2.4mm-male-vna-cable-cable-assembly-pe3tc0700-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3TC0700-24 CAD Drawing

2.4mm Male to 2.4mm Male Right Angle Precision Cable 24 Inch
Length Using High Flex VNA Test Coax, RoHS

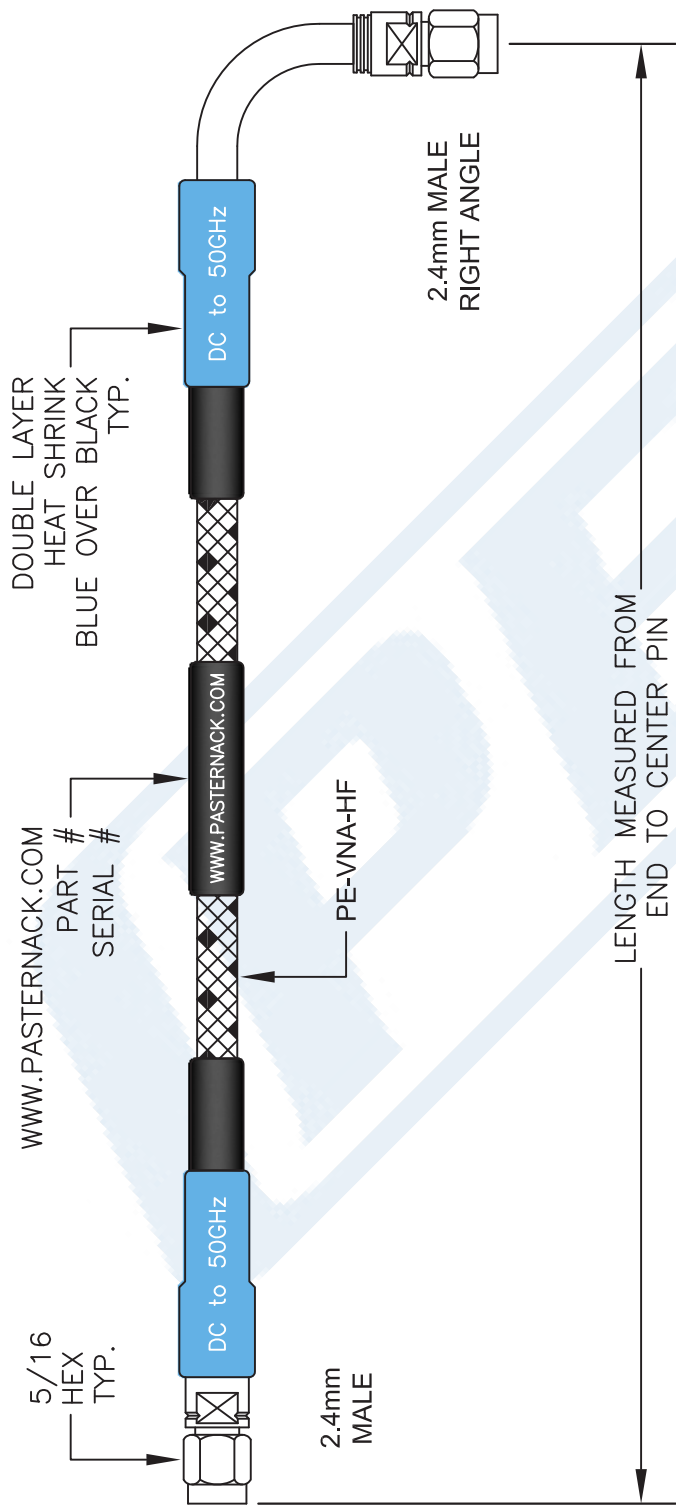

- NOTES:
- 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 - 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 - 3. DIMENSIONS ARE IN INCHES [mm].
 - 4. LENGTH TOLERANCE IS $\pm 2\%$

DWG TITLE
PE3TC0700

FSCM NO. 53919

CAD FILE 100815

SCALE N/A

SIZE A

2233

PE PASTERNAK
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com