



**TNC Male Right Angle to N Male Right Angle Cable  
150 cm Length Using LMR-240 Coax with HeatShrink**

**RF Cable Assemblies Technical Data Sheet**


**PE3W00815/HS-150CM**

**Configuration**

- Connector 1: TNC Male Right Angle
- Connector 2: N Male Right Angle
- Cable Type: LMR-240

**Features**

- Max Frequency 3 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

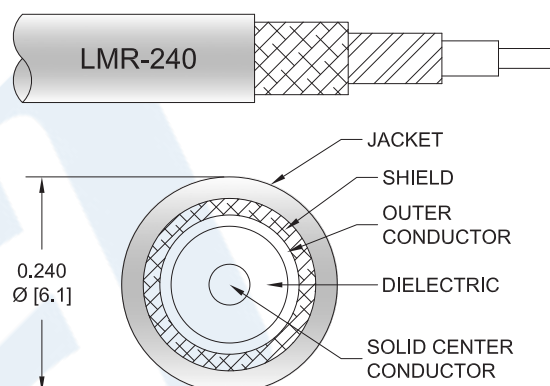

**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE3W00815/HS-150CM TNC male right angle to type N male right angle 150 cm cable using LMR-240 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack TNC to type N cable assembly has a male to male gender configuration with 50 ohm flexible LMR-240 coax. The PE3W00815/HS-150CM TNC male to type N male cable assembly operates to 3 GHz. The right angle TNC and right angle type N interfaces on the LMR-240 cable allow for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to N Male Right Angle Cable 150 cm Length Using LMR-240 Coax with HeatShrink PE3W00815/HS-150CM](#)



TNC Male Right Angle to N Male Right Angle Cable  
150 cm Length Using LMR-240 Coax with HeatShrink

## RF Cable Assemblies Technical Data Sheet

**PE3W00815/HS-150CM**

### Electrical Specifications

| Description                          | Minimum | Typical      | Maximum | Units              |
|--------------------------------------|---------|--------------|---------|--------------------|
| Frequency Range                      | DC      |              | 3       | GHz                |
| VSWR                                 |         |              | 1.5:1   |                    |
| Velocity of Propagation              |         | 84           |         | %                  |
| RF Shielding                         | 90      |              |         | dB                 |
| Group Delay                          |         | 1.21 [3.97]  |         | ns/ft [ns/m]       |
| Capacitance                          |         | 24.2 [79.4]  |         | pF/ft [pF/m]       |
| Inductance                           |         | 0.06 [0.2]   |         | uH/ft [uH/m]       |
| DC Resistance Inner Conductor<br>Km] |         | 3.2 [10.5]   |         | Ohms/1000ft [Ohms/ |
| DC Resistance Outer Conductor<br>Km] |         | 3.89 [12.76] |         | Ohms/1000ft [Ohms/ |
| Jacket Spark                         |         |              | 5,000   | Vrms               |

### Specifications by Frequency

| Description           | F1    | F2   | F3    | F4    | F5    | Units |
|-----------------------|-------|------|-------|-------|-------|-------|
| Frequency             | 0.25  | 0.5  | 1     | 2.5   | 3     | GHz   |
| Insertion Loss (Max.) | 0.591 | 0.67 | 0.788 | 1.034 | 1.064 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax use in this assembly. The Insertion Loss includes an estimated insertion loss of 0.4dB of connector Loss

### Mechanical Specifications

#### Cable Assembly

|          |                      |
|----------|----------------------|
| Length*  | 59.05 in [149.99 cm] |
| Diameter | 0.83 in [21.08 mm]   |

#### Cable

|                                      |                     |
|--------------------------------------|---------------------|
| Cable Type                           | LMR-240             |
| Impedance                            | 50 Ohms             |
| Inner Conductor Type                 | Solid               |
| Inner Conductor Material and Plating | Copper              |
| Dielectric Type                      | PE (F)              |
| Number of Shields                    | 2                   |
| Shield Layer 1                       | Aluminum Tape       |
| Shield Layer 2                       | Tinned Copper Braid |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to N Male Right Angle Cable 150 cm Length Using LMR-240 Coax with HeatShrink PE3W00815/HS-150CM](#)



## TNC Male Right Angle to N Male Right Angle Cable 150 cm Length Using LMR-240 Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet

**PE3W00815/HS-150CM**

|                              |                        |
|------------------------------|------------------------|
| Jacket Material              | PE, Black              |
| Jacket Diameter              | 0.24 in [6.1 mm]       |
| One Time Minimum Bend Radius | 0.75 in [19.05 mm]     |
| Repeated Minimum Bend Radius | 2.5 in [63.5 mm]       |
| Bending Moment               | 0.25 lbs-ft [0.34 N-m] |
| Flat Plate Crush             | 20 lbs/in [0.36 Kg/mm] |
| Tensile Strength             | 80 lbs [36.29 Kg]      |

#### Connectors

| Description                       | Connector 1          | Connector 2        |
|-----------------------------------|----------------------|--------------------|
| Type                              | TNC Male Right Angle | N Male Right Angle |
| Impedance                         | 50 Ohms              | 50 Ohms            |
| Contact Material and Plating      | Brass, Gold          | Brass, Gold        |
| Dielectric Type                   | PTFE                 | PTFE               |
| Body Material and Plating         | Brass, Nickel        | Brass, Tri-Metal   |
| Coupling Nut Material and Plating | Brass, Nickel        |                    |

#### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

#### Environmental Specifications

##### Temperature

Operating Range -40 to +85 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to N Male Right Angle Cable 150 cm Length Using LMR-240 Coax with HeatShrink PE3W00815/HS-150CM](#)



**TNC Male Right Angle to N Male Right Angle Cable  
150 cm Length Using LMR-240 Coax with HeatShrink**

**RF Cable Assemblies Technical Data Sheet**

**PE3W00815/HS-150CM**

**How to Order**

Part Number Configuration:

**PE3W00815/HS**

**- xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W00815/HS-12 = 12 inches long cable  
PE3W00815/HS-100cm = 100 cm long cable

TNC Male Right Angle to N Male Right Angle Cable 150 cm Length Using LMR-240 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [TNC Male Right Angle to N Male Right Angle Cable 150 cm Length Using LMR-240 Coax with HeatShrink PE3W00815/HS-150CM](https://www.pasternack.com/tnc-male-n-male-lmr240-cable-assembly-pe3w00815-hs-150cm-p.aspx)


URL: <https://www.pasternack.com/tnc-male-n-male-lmr240-cable-assembly-pe3w00815-hs-150cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE3W00815/HS-150CM CAD Drawing

TNC Male Right Angle to N Male Right Angle Cable 150 cm  
Length Using LMR-240 Coax with HeatShrink

| REVISIONS |                 |          |          |
|-----------|-----------------|----------|----------|
| REV.      | DESCRIPTION     | DATE     | APPROVED |
| A         | INITIAL RELEASE | 04/30/19 | SELLIS   |

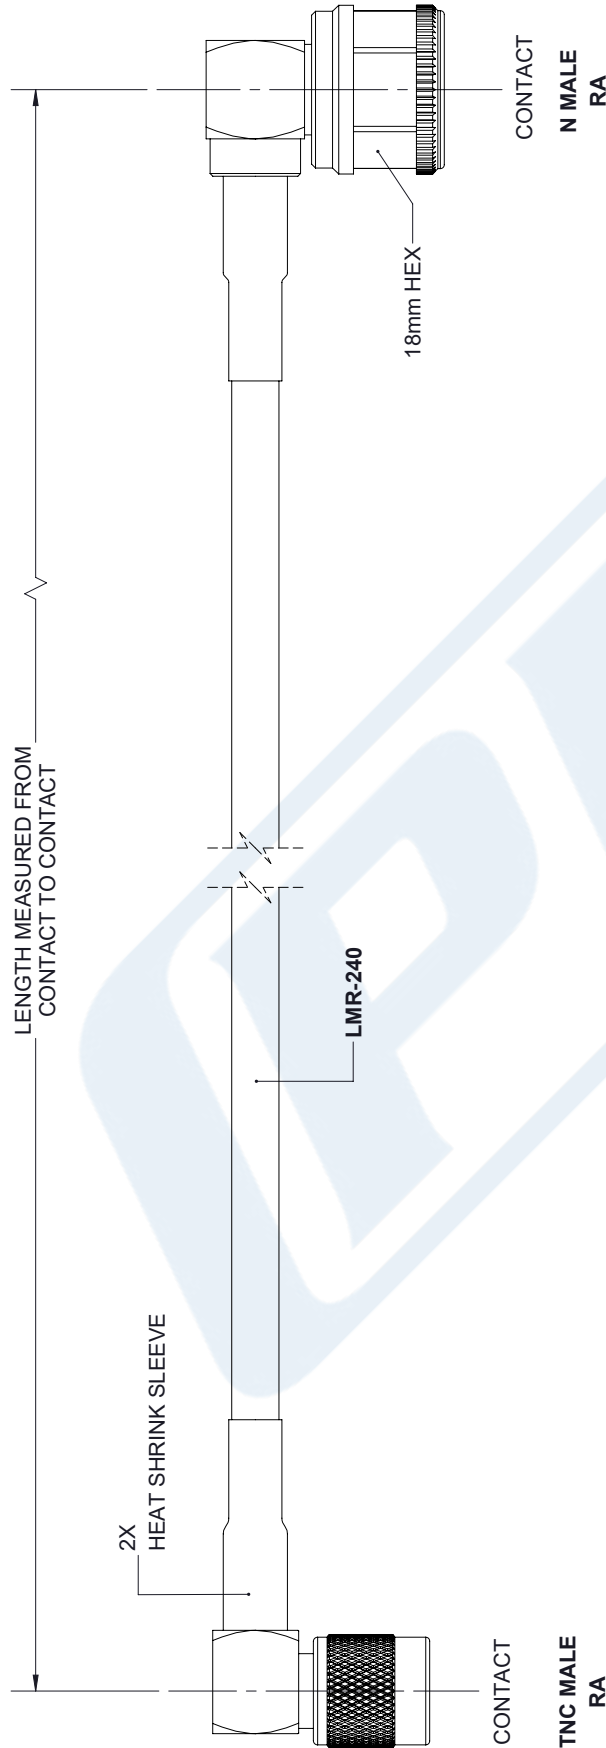

|                                                                                                  |           |
|--------------------------------------------------------------------------------------------------|-----------|
| UNLESS OTHERWISE SPECIFIED<br>LEADING DIMENSIONS ARE INCHES<br>DIMENSIONS IN [ ] ARE MILLIMETERS |           |
| TOLERANCES:                                                                                      | FRACTIONS |
| X±.2 [5.08]                                                                                      | ±.132     |
| .XX±.01 [.25]                                                                                    | ±.005     |
| .XXX±.005 [.13]                                                                                  | ±.001     |
| ALL DIMENSIONS SHOWN<br>ARE FOR REFERENCE ONLY.                                                  |           |
| THIRD-ANGLE PROJECTION                                                                           |           |

|                                                                                                                                                                                         |              |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| <b>PE PASTERNAK</b><br>an INFINITO brand                                                                                                                                                |              |
| Pasternack Enterprises, Inc.<br>P.O. Box 16759, Irvine, CA 92623.<br>Phone: 1.949.261.1920   1.866.727.8376<br>Fax: 1.949.261.7451<br>www.pasternack.com   e-mail: sales@pasternack.com |              |
| SIZE                                                                                                                                                                                    | A            |
| CAGE                                                                                                                                                                                    | 53919        |
| DRAWN BY                                                                                                                                                                                | K.DANG       |
| PART NUMBER                                                                                                                                                                             | PE3W00815/HS |
| REV                                                                                                                                                                                     | A            |

|                                                                                                                        |        |
|------------------------------------------------------------------------------------------------------------------------|--------|
| THE INFORMATION AND<br>DESIGN IN THIS DOCUMENT<br>IS THE PROPERTY OF<br>PASTERNAK CORPORATION.<br>ALL RIGHTS RESERVED. |        |
| SHEET                                                                                                                  | 1 OF 1 |
| SCALE                                                                                                                  | N/A    |

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.