



N Male to TNC Male Right Angle Cable 50 CM  
Length Using LMR-400 Coax with HeatShrink

**RF Cable Assemblies Technical Data Sheet**


**PE3W03073/HS-50CM**

**Configuration**

- Connector 1: N Male
- Connector 2: TNC Male Right Angle
- Cable Type: LMR-400

**Features**

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 85% Phase Velocity
- Double Shielded
- PE Jacket

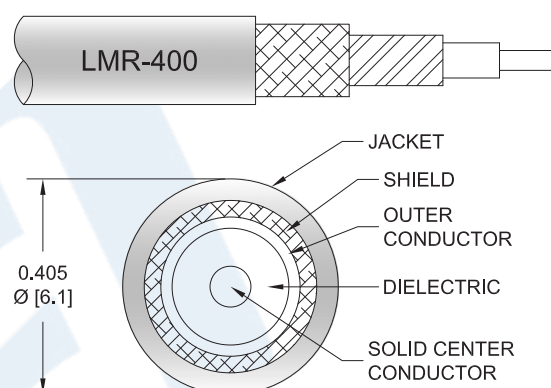

**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE3W03073/HS-50CM type N male to TNC male right angle 50 cm cable using LMR-400 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to TNC cable assembly has a male to male gender configuration with 50 ohm flexible LMR-400 coax. The PE3W03073/HS-50CM type N male to TNC male cable assembly operates to 5.8 GHz. The right angle TNC interface on the LMR-400 cable allows for easier connections in tight spaces. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Right Angle Cable 50 CM Length Using LMR-400 Coax with HeatShrink PE3W03073/HS-50CM](#)



## N Male to TNC Male Right Angle Cable 50 CM Length Using LMR-400 Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet

**PE3W03073/HS-50CM**

#### Electrical Specifications

| Description                   | Minimum | Typical      | Maximum | Units           |
|-------------------------------|---------|--------------|---------|-----------------|
| Frequency Range               | DC      |              | 5.8     | GHz             |
| VSWR                          |         |              | 1.5:1   |                 |
| Return Loss                   |         |              | -15.56  | dB              |
| Velocity of Propagation       |         | 85           |         | %               |
| RF Shielding                  | 90      |              |         | dB              |
| Group Delay                   |         | 1.2 [3.94]   |         | ns/ft [ns/m]    |
| Capacitance                   |         | 23.9 [78.41] |         | pF/ft [pF/m]    |
| Inductance                    |         | 0.06 [0.2]   |         | uH/ft [uH/m]    |
| DC Resistance Inner Conductor |         | 1.39 [4.56]  |         | Ω/1000ft [Ω/Km] |
| DC Resistance Outer Conductor |         | 1.65 [5.41]  |         | Ω/1000ft [Ω/Km] |
| Jacket Spark                  |         |              | 8,000   | Vrms            |

#### Specifications by Frequency

| Description           | F1   | F2   | F3   | F4   | F5   | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency             | 0.25 | 0.5  | 1    | 2.5  | 5.8  | GHz   |
| Insertion Loss (Max.) | 0.32 | 0.33 | 0.34 | 0.37 | 0.42 | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax used in this assembly. The Insertion Loss Includes an estimated insertion loss of 0.3dB of connector loss.

#### Mechanical Specifications

##### Cable Assembly

|          |                      |
|----------|----------------------|
| Length*  | 19.69 in [500.13 mm] |
| Diameter | 0.8 in [20.32 mm]    |

##### Cable

|                                      |                      |
|--------------------------------------|----------------------|
| Cable Type                           | LMR-400              |
| Impedance                            | 50 Ohms              |
| Inner Conductor Type                 | Solid                |
| Inner Conductor Material and Plating | Copper Clad Aluminum |
| Dielectric Type                      | PE (F)               |
| Number of Shields                    | 2                    |
| Shield Layer 1                       | Aluminum Tape        |
| Shield Layer 2                       | Tinned Copper Braid  |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Right Angle Cable 50 CM Length Using LMR-400 Coax with HeatShrink PE3W03073/HS-50CM](#)



## N Male to TNC Male Right Angle Cable 50 CM Length Using LMR-400 Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet

**PE3W03073/HS-50CM**

|                              |                        |
|------------------------------|------------------------|
| Jacket Material              | PE, Black              |
| Jacket Diameter              | 0.405 in [10.29 mm]    |
| One Time Minimum Bend Radius | 1 in [25.4 mm]         |
| Repeated Minimum Bend Radius | 4 in [101.6 mm]        |
| Bending Moment               | 0.5 lbs-ft [0.68 N-m]  |
| Flat Plate Crush             | 40 lbs/in [0.71 Kg/mm] |
| Tensile Strength             | 160 lbs [72.57 Kg]     |

#### Connectors

| Description                        | Connector 1       | Connector 2          |
|------------------------------------|-------------------|----------------------|
| Type                               | N Male            | TNC Male Right Angle |
| Impedance                          | 50 Ohms           | 50 Ohms              |
| Contact Material and Plating       | Brass, Gold       | Brass, Silver        |
| Contact Plating Specification      | 50 µ in. minimum  |                      |
| Dielectric Type                    | PTFE              | PTFE                 |
| Body Material and Plating          | Brass, Tri-Metal  | Brass, Silver        |
| Body Plating Specification         | 150 µ in. minimum |                      |
| Coupling Nut Material and Plating  | Brass, Tri-Metal  | Brass, Silver        |
| Coupling Nut Plating Specification | 150 µ in. minimum |                      |
| Hex Size                           | 13/16 inch        |                      |

#### Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

#### Environmental Specifications

##### Temperature

Operating Range -40 to +85 deg C

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Right Angle Cable 50 CM Length Using LMR-400 Coax with HeatShrink PE3W03073/HS-50CM](#)




N Male to TNC Male Right Angle Cable 50 CM  
Length Using LMR-400 Coax with HeatShrink

## RF Cable Assemblies Technical Data Sheet

**PE3W03073/HS-50CM**

### Typical Performance Data

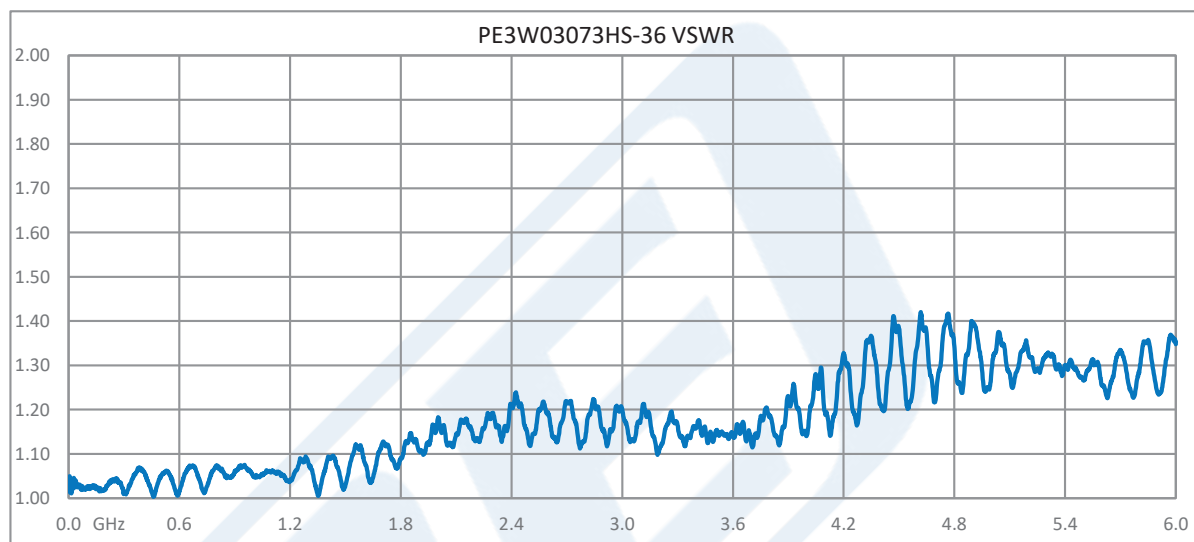

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Right Angle Cable 50 CM Length Using LMR-400 Coax with HeatShrink PE3W03073/HS-50CM](#)



N Male to TNC Male Right Angle Cable 50 CM  
Length Using LMR-400 Coax with HeatShrink

## RF Cable Assemblies Technical Data Sheet

**PE3W03073/HS-50CM**

### How to Order

Part Number Configuration:

**PE3W03073/HS**

**- xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W03073/HS-12 = 12 inches long cable  
PE3W03073/HS-100cm = 100 cm long cable

N Male to TNC Male Right Angle Cable 50 CM Length Using LMR-400 Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male to TNC Male Right Angle Cable 50 CM Length Using LMR-400 Coax with HeatShrink PE3W03073/HS-50CM](https://www.pasternack.com/n-male-tnc-male-lmr400-cable-assembly-pe3w03073-hs-50cm-p.aspx)


URL: <https://www.pasternack.com/n-male-tnc-male-lmr400-cable-assembly-pe3w03073-hs-50cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W03073/HS-50CM CAD Drawing

N Male to TNC Male Right Angle Cable 50 CM Length

Using LMR-400 Coax with HeatShrink

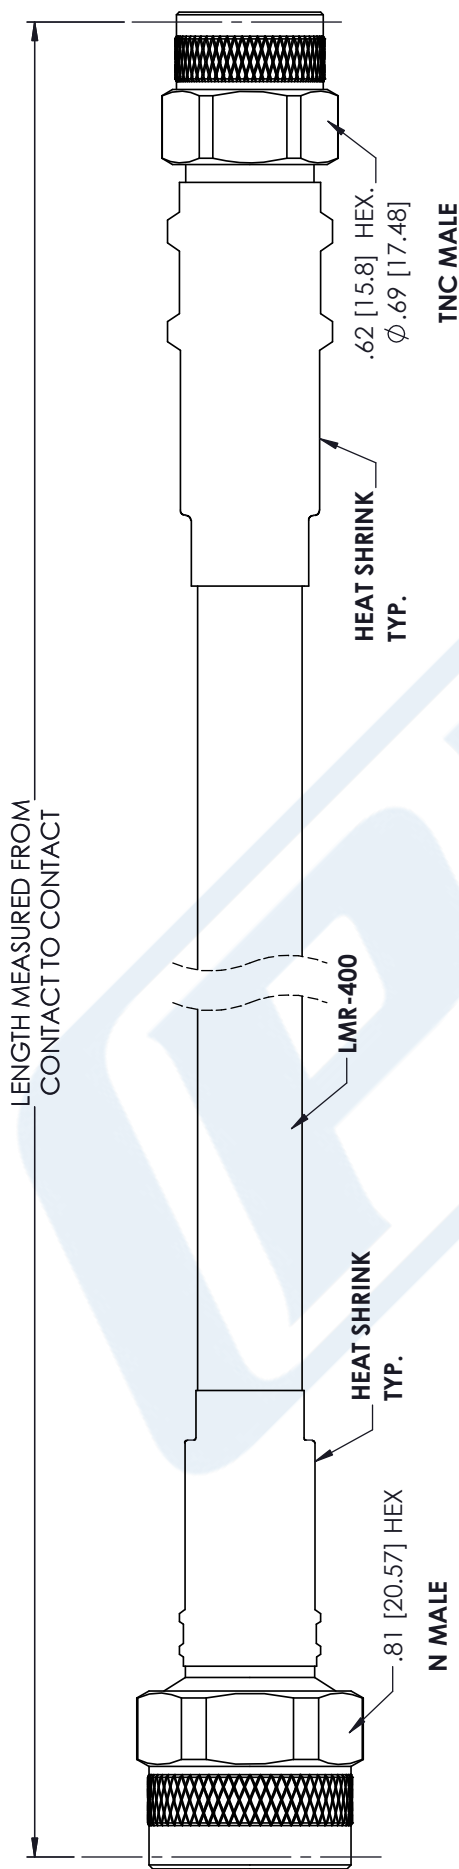

STANDARD TOLERANCES

.X ±0.2  
.XX ±0.01  
.XXX ±0.005

\*STANDARD TOLERANCES APPLY  
ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE

PE3W03073/HS

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE 09/26/18

SCALE N/A

SIZE A

CN2379