



## SMA Male Right Angle to SMA Male Right Angle Cable 150 cm Length Using PE-SR405FLJ Coax with HeatShrink

### RF Cable Assemblies Technical Data Sheet


**PE3W03174/HS-150CM**

#### Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Male Right Angle
- Cable Type: PE-SR405FLJ

#### Features

- Max Frequency 10 GHz
- Shielding Effectivity > 100 dB
- 69.5% Phase Velocity
- FEP Jacket

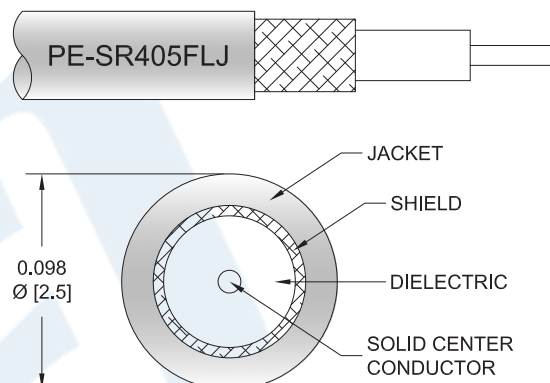

#### Applications

- General Purpose
- Laboratory Use

#### Description

Pasternack's PE3W03174/HS-150CM SMA male right angle to SMA male right angle 150 cm cable using PE-SR405FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMA cable assembly has a male to male gender configuration with 50 ohm formable PE-SR405FLJ coax. The PE3W03174/HS-150CM SMA male to SMA male cable assembly operates to 10 GHz. The right angle SMA interfaces on the PE-SR405FLJ cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

#### Electrical Specifications

| Description             | Minimum | Typical     | Maximum | Units        |
|-------------------------|---------|-------------|---------|--------------|
| Frequency Range         | DC      |             | 10      | GHz          |
| VSWR                    |         |             | 1.5:1   |              |
| Velocity of Propagation |         | 69.5        |         | %            |
| RF Shielding            | 100     |             |         | dB           |
| Group Delay             |         | 1.43 [4.69] |         | ns/ft [ns/m] |
| Capacitance             |         | 29 [95.14]  |         | pF/ft [pF/m] |
| Operating Voltage (AC)  |         |             | 335     | Vrms         |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable 150 cm Length Using PE-SR405FLJ Coax with HeatShrink PE3W03174/HS-150CM](#)



SMA Male Right Angle to SMA Male Right Angle Cable  
150 cm Length Using PE-SR405FLJ Coax with HeatShrink

**RF Cable Assemblies Technical Data Sheet**

**PE3W03174/HS-150CM**

**Specifications by Frequency**

| Description           | F1   | F2   | F3   | F4   | F5  | Units |
|-----------------------|------|------|------|------|-----|-------|
| Frequency             | 0.5  | 1    | 2.5  | 5    | 10  | GHz   |
| Insertion Loss (Max.) | 1.14 | 1.51 | 2.11 | 3.11 | 4.4 | dB    |

**Electrical Specification Notes:**

The Insertion Loss data above is based on the performance specifications of the coax use in this assembly. The Insertion Loss includes an estimated insertion loss of 0.4dB of connector Loss

**Mechanical Specifications**

**Cable Assembly**

|          |                      |
|----------|----------------------|
| Length*  | 59.05 in [149.99 cm] |
| Diameter | 0.315 in [8 mm]      |

**Cable**

|                                      |                           |
|--------------------------------------|---------------------------|
| Cable Type                           | PE-SR405FLJ               |
| Impedance                            | 50 Ohms                   |
| Inner Conductor Type                 | Solid                     |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver |
| Dielectric Type                      | PTFE                      |
| Number of Shields                    | 1                         |
| Outer Conductor Material and Plating | Tinned Copper Braid       |
| Jacket Material                      | FEP, Black                |
| Jacket Diameter                      | 0.098 in [2.49 mm]        |
| One Time Minimum Bend Radius         | 0.236 in [5.99 mm]        |
| Repeated Minimum Bend Radius         | 0.787 in [19.99 mm]       |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable 150 cm Length Using PE-SR405FLJ Coax with HeatShrink PE3W03174/HS-150CM](#)



SMA Male Right Angle to SMA Male Right Angle Cable  
150 cm Length Using PE-SR405FLJ Coax with HeatShrink

## RF Cable Assemblies Technical Data Sheet

**PE3W03174/HS-150CM**

### Connectors

| Description                        | Connector 1           | Connector 2           |
|------------------------------------|-----------------------|-----------------------|
| Type                               | SMA Male Right Angle  | SMA Male Right Angle  |
| Specification                      | MIL-STD-348A          | MIL-STD-348A          |
| Impedance                          | 50 Ohms               | 50 Ohms               |
| Contact Material and Plating       | Brass, Gold           | Brass, Gold           |
| Contact Plating Specification      | 50 µin minimum        | 50 µin minimum        |
| Dielectric Type                    | PTFE                  | PTFE                  |
| Body Material and Plating          | Stainless Steel, Gold | Stainless Steel, Gold |
| Body Plating Specification         | 30 µin minimum        | 30 µin minimum        |
| Coupling Nut Material and Plating  | Brass, Nickel         | Brass, Nickel         |
| Coupling Nut Plating Specification | 100 µin minimum       | 100 µin minimum       |
| Hex Size                           | 5/16 inch             | 5/16 inch             |
| Torque                             | 3 in-lbs [0.34 Nm]    | 3 in-lbs [0.34 Nm]    |

Mechanical Specification Notes:

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

### Environmental Specifications

#### Temperature

Operating Range -55 to +125 deg C

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable 150 cm Length Using PE-SR405FLJ Coax with HeatShrink PE3W03174/HS-150CM](#)



SMA Male Right Angle to SMA Male Right Angle Cable  
150 cm Length Using PE-SR405FLJ Coax with HeatShrink

**RF Cable Assemblies Technical Data Sheet**

**PE3W03174/HS-150CM**

**How to Order**

Part Number Configuration:

**PE3W03174/HS**

**- xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W03174/HS-12 = 12 inches long cable  
PE3W03174/HS-100cm = 100 cm long cable

SMA Male Right Angle to SMA Male Right Angle Cable 150 cm Length Using PE-SR405FLJ Coax with HeatShrink from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Male Right Angle Cable 150 cm Length Using PE-SR405FLJ Coax with HeatShrink PE3W03174/HS-150CM](#)


URL: <https://www.pasternack.com/sma-male-sma-male-pe-sr405flj-cable-assembly-pe3w03174-hs-150cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3W03174/HS-150CM CAD Drawing**  
SMA Male Right Angle to SMA Male Right Angle Cable 150 cm  
Length Using PE-SR405FLJ Coax with HeatShrink

REVISIONS

| REV. | DESCRIPTION     | DATE     | APPROVED |
|------|-----------------|----------|----------|
| A    | INITIAL RELEASE | 04/23/19 | SELLIS   |

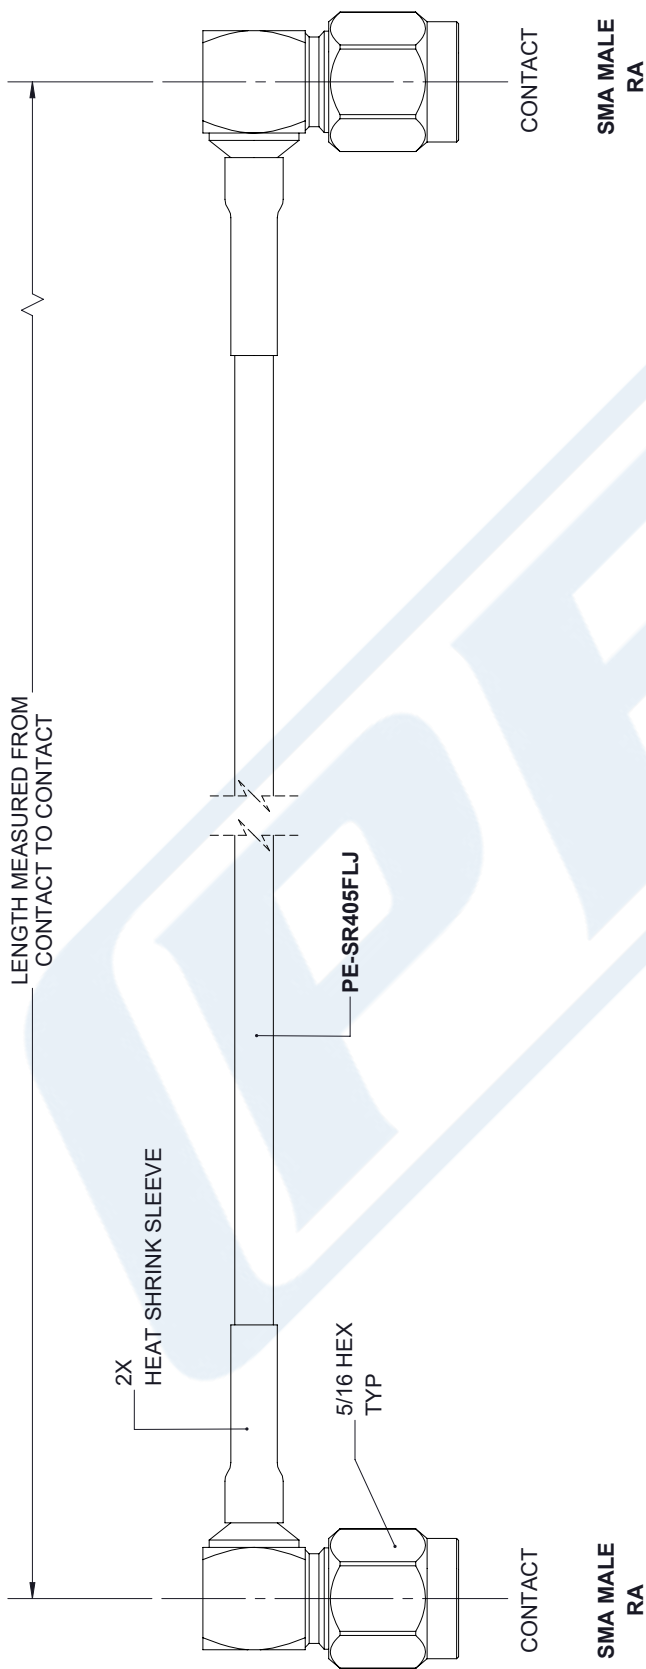

|                                                                                                  |             |
|--------------------------------------------------------------------------------------------------|-------------|
| UNLESS OTHERWISE SPECIFIED<br>LEADING DIMENSIONS ARE INCHES<br>DIMENSIONS IN [ ] ARE MILLIMETERS |             |
| TOLERANCES:                                                                                      | FRACTIONS   |
| X±.2 [5.08]                                                                                      | ±.132       |
| .XX±.01 [.25]                                                                                    | ±.13        |
| .XXX±.005 [.13]                                                                                  | ANGLES ± 1° |
| ALL DIMENSIONS SHOWN<br>ARE FOR REFERENCE ONLY.                                                  |             |
| THIRD-ANGLE PROJECTION                                                                           |             |



Pasternack Enterprises, Inc.  
P.O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
www.pasternack.com | e-mail: sales@pasternack.com

THE INFORMATION AND  
DESIGN IN THIS DOCUMENT  
IS THE PROPERTY OF  
PASTERNAK CORPORATION.  
ALL RIGHTS RESERVED.

SHEET 1 OF 1  
SCALE N/A

| SIZE | CAGE  | DRAWN BY | PART NUMBER  | REV |
|------|-------|----------|--------------|-----|
| A    | 53919 | K.DANG   | PE3W03174/HS | A   |

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT  
ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.