



SMP Female Right Angle to SMP Female Right Angle
Cable 24 Inch Length Using PE-047SR Coax

RF Cable Assemblies Technical Data Sheet

PE3W04802-24

Configuration

- Connector 1: SMP Female Right Angle
- Connector 2: SMP Female Right Angle
- Cable Type: PE-047SR

Features

- Max Frequency 8 GHz

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W04802-24 SMP female right angle to SMP female right angle 24 inch cable using PE-047SR coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack SMP to SMP cable assembly has a female to female gender configuration with 50 ohm semi-rigid PE-047SR coax. The PE3W04802-24 SMP female to SMP female cable assembly operates to 8 GHz. The right angle SMP interfaces on the PE-047SR cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.5:1	

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4	8		GHz
Insertion Loss (Max.)	1.2	1.36	1.68	2.31		dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax use in this assembly. The Insertion Loss includes an estimated insertion loss of 0.4dB of connector Loss

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Female Right Angle to SMP Female Right Angle Cable 24 Inch Length Using PE-047SR Coax PE3W04802-24](#)



SMP Female Right Angle to SMP Female Right Angle
Cable 24 Inch Length Using PE-047SR Coax

RF Cable Assemblies Technical Data Sheet

PE3W04802-24

Mechanical Specifications

Cable Assembly

Length* 24 in [609.6 mm]
Diameter 0.187 in [4.75 mm]

Cable

Cable Type PE-047SR
Impedance 50 Ohms
Inner Conductor Type Solid
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 1
Outer Conductor Material and Plating Copper

Repeated Minimum Bend Radius 0.05 in [1.27 mm]

Connectors

Description	Connector 1	Connector 2
Type	SMP Female Right Angle	SMP Female Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	MIL-DTL-45204	MIL-DTL-45204
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Body Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Body Plating Specification	MIL-DTL-45204	MIL-DTL-45204

Environmental Specifications

Temperature

Operating Range -55 to +100 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Female Right Angle to SMP Female Right Angle Cable 24 Inch Length Using PE-047SR Coax PE3W04802-24](#)



SMP Female Right Angle to SMP Female Right Angle Cable 24 Inch Length Using PE-047SR Coax

RF Cable Assemblies Technical Data Sheet

PE3W04802-24

How to Order

Part Number Configuration:

PE3W04802

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W04802-12 = 12 inches long cable
PE3W04802-100cm = 100 cm long cable

SMP Female Right Angle to SMP Female Right Angle Cable 24 Inch Length Using PE-047SR Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMP Female Right Angle to SMP Female Right Angle Cable 24 Inch Length Using PE-047SR Coax PE3W04802-24](https://www.pasternack.com/smp-female-smp-female-pe-047sr-cable-assembly-pe3w04802-24-p.aspx)

URL: <https://www.pasternack.com/smp-female-smp-female-pe-047sr-cable-assembly-pe3w04802-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W04802-24 CAD Drawing
SMP Female Right Angle to SMP Female Right Angle
Cable 24 Inch Length Using PE-047SR Coax

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	05/13/19	SELLIS

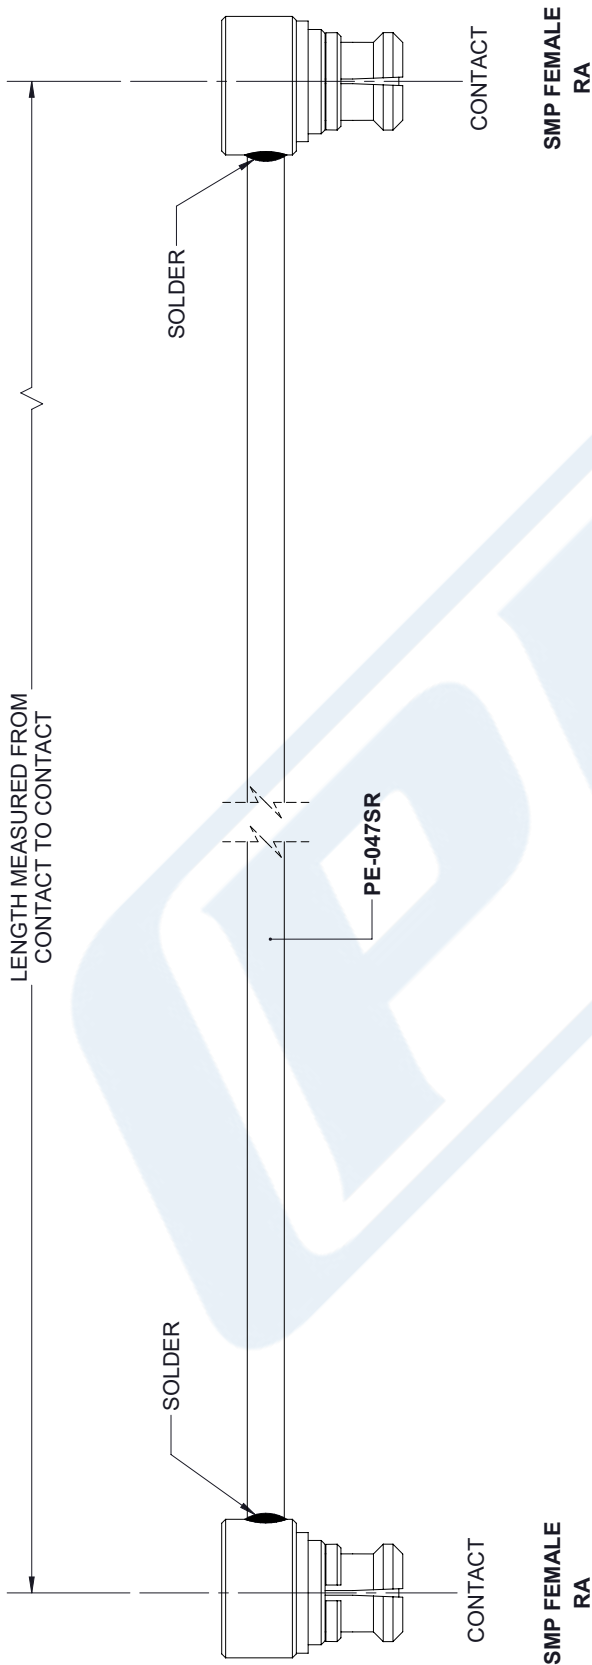

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS	
TOLERANCES:	FRACTIONS
X±.2 [5.08]	±.132
.XX±.01 [.25]	±.132
.XXX±.005 [.13]	±.132
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.	
THIRD-ANGLE PROJECTION	

PE PASTERNAK an INFINITI brand	
Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 www.pasternack.com e-mail: sales@pasternack.com	
SIZE	PART NUMBER
A	PE3W04802
CAGE	DRAWN BY
53919	K.DANG

THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION. ALL RIGHTS RESERVED.	
SHEET	OF
1	1
SCALE	
N/A	
REV	
A	

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT
ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.