



N Female to Reverse Polarity TNC Female Cable  
200 cm Length Using LMR-195 Coax , LF Solder

**RF Cable Assemblies Technical Data Sheet**


**PE3W05123LF-200CM**

**Configuration**

- Connector 1: N Female
- Connector 2: TNC Female Reverse Polarity
- Cable Type: LMR-195

**Features**

- Max Frequency 5 GHz
- Shielding Effectivity > 90 dB
- 80% Phase Velocity
- Double Shielded
- PE Jacket

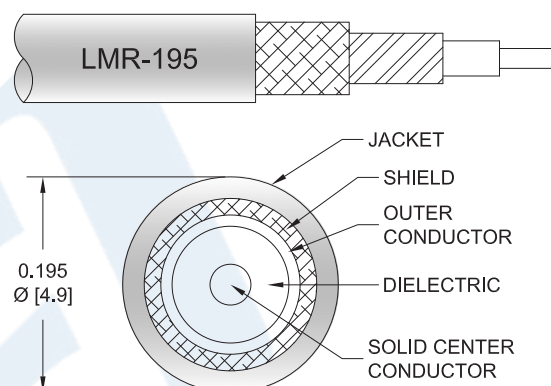

**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE3W05123LF-200CM type N female to reverse polarity TNC female 200 cm cable using LMR-195 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to reverse polarity TNC cable assembly has a female to female gender configuration with 50 ohm flexible LMR-195 coax. The PE3W05123LF-200CM type N female to reverse polarity TNC female cable assembly operates to 5 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to Reverse Polarity TNC Female Cable 200 cm Length Using LMR-195 Coax , LF Solder PE3W05123LF-200CM](#)



N Female to Reverse Polarity TNC Female Cable  
200 cm Length Using LMR-195 Coax , LF Solder

**RF Cable Assemblies Technical Data Sheet**

**PE3W05123LF-200CM**

**Electrical Specifications**

| Description                          | Minimum | Typical      | Maximum | Units              |
|--------------------------------------|---------|--------------|---------|--------------------|
| Frequency Range                      | DC      |              | 5       | GHz                |
| VSWR                                 |         |              | 1.5:1   |                    |
| Velocity of Propagation              |         | 80           |         | %                  |
| RF Shielding                         | 90      |              |         | dB                 |
| Group Delay                          |         | 1.27 [4.17]  |         | ns/ft [ns/m]       |
| Capacitance                          |         | 25.4 [83.33] |         | pF/ft [pF/m]       |
| Inductance                           |         | 0.064 [0.21] |         | uH/ft [uH/m]       |
| DC Resistance Inner Conductor<br>Km] |         | 7.6 [24.93]  |         | Ohms/1000ft [Ohms/ |
| DC Resistance Outer Conductor<br>Km] |         | 4.9 [16.08]  |         | Ohms/1000ft [Ohms/ |
| Jacket Spark                         |         |              | 3,000   | Vrms               |

**Specifications by Frequency**

| Description           | F1   | F2   | F3   | F4   | F5   | Units |
|-----------------------|------|------|------|------|------|-------|
| Frequency             | 0.25 | 0.5  | 1    | 2.5  | 5    | GHz   |
| Insertion Loss (Max.) | 0.56 | 0.64 | 0.78 | 1.45 | 1.93 | dB    |

**Electrical Specification Notes:**

The Insertion Loss data above is based on the performance specifications of the coax use in this assembly. The Insertion Loss includes an estimated insertion loss of 0.2dB of connector Loss

**Mechanical Specifications**

**Cable Assembly**

Length\* 78.74 in [200 cm]

**Cable**

|                                      |                     |
|--------------------------------------|---------------------|
| Cable Type                           | LMR-195             |
| Impedance                            | 50 Ohms             |
| Inner Conductor Type                 | Solid               |
| Inner Conductor Material and Plating | Copper              |
| Dielectric Type                      | PE (F)              |
| Number of Shields                    | 2                   |
| Shield Layer 1                       | Aluminum Tape       |
| Shield Layer 2                       | Tinned Copper Braid |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to Reverse Polarity TNC Female Cable 200 cm Length Using LMR-195 Coax , LF Solder PE3W05123LF-200CM](#)



N Female to Reverse Polarity TNC Female Cable  
200 cm Length Using LMR-195 Coax , LF Solder

**RF Cable Assemblies Technical Data Sheet**

**PE3W05123LF-200CM**

|                              |                        |
|------------------------------|------------------------|
| Jacket Material              | PE, Black              |
| Jacket Diameter              | 0.195 in [4.95 mm]     |
| One Time Minimum Bend Radius | 0.5 in [12.7 mm]       |
| Repeated Minimum Bend Radius | 2 in [50.8 mm]         |
| Bending Moment               | 0.2 lbs-ft [0.27 N-m]  |
| Flat Plate Crush             | 15 lbs/in [0.27 Kg/mm] |
| Tensile Strength             | 40 lbs [18.14 Kg]      |

**Connectors**

| Description                   | Connector 1   | Connector 2                 |
|-------------------------------|---------------|-----------------------------|
| Type                          | N Female      | TNC Female Reverse Polarity |
| Impedance                     | 50 Ohms       | 50 Ohms                     |
| Contact Material and Plating  |               | Brass, Gold                 |
| Contact Plating Specification |               | 30 µin minimum              |
| Dielectric Type               |               | PTFE                        |
| Body Material and Plating     | Brass, Nickel | Brass, Nickel               |
| Body Plating Specification    |               | 100 µin minimum             |

**Mechanical Specification Notes:**

\*All cable assemblies have a length tolerance of 1.5% or  $\pm 3/8"$ , whichever is greater.

**Compliance Certifications** (see [product page](#) for current document)

**Plotted and Other Data**

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to Reverse Polarity TNC Female Cable 200 cm Length Using LMR-195 Coax , LF Solder PE3W05123LF-200CM](#)



**N Female to Reverse Polarity TNC Female Cable  
200 cm Length Using LMR-195 Coax , LF Solder**

**RF Cable Assemblies Technical Data Sheet**

**PE3W05123LF-200CM**

**How to Order**

Part Number Configuration:

**PE3W05123LF**

**- xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE3W05123LF-12 = 12 inches long cable  
PE3W05123LF-100cm = 100 cm long cable

N Female to Reverse Polarity TNC Female Cable 200 cm Length Using LMR-195 Coax , LF Solder from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Female to Reverse Polarity TNC Female Cable 200 cm Length Using LMR-195 Coax , LF Solder PE3W05123LF-200CM](https://www.pasternack.com/n-female-tnc-female-lmr195-cable-assembly-pe3w05123lf-200cm-p.aspx)

URL: <https://www.pasternack.com/n-female-tnc-female-lmr195-cable-assembly-pe3w05123lf-200cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

**PE3W05123LF-200CM CAD Drawing**  
N Female to Reverse Polarity TNC Female Cable 200 cm  
Length Using LMR-195 Coax , LF Solder

| REVISIONS |                 |          |          |
|-----------|-----------------|----------|----------|
| REV.      | DESCRIPTION     | DATE     | APPROVED |
| A         | INITIAL RELEASE | 04/23/19 | SELLIS   |

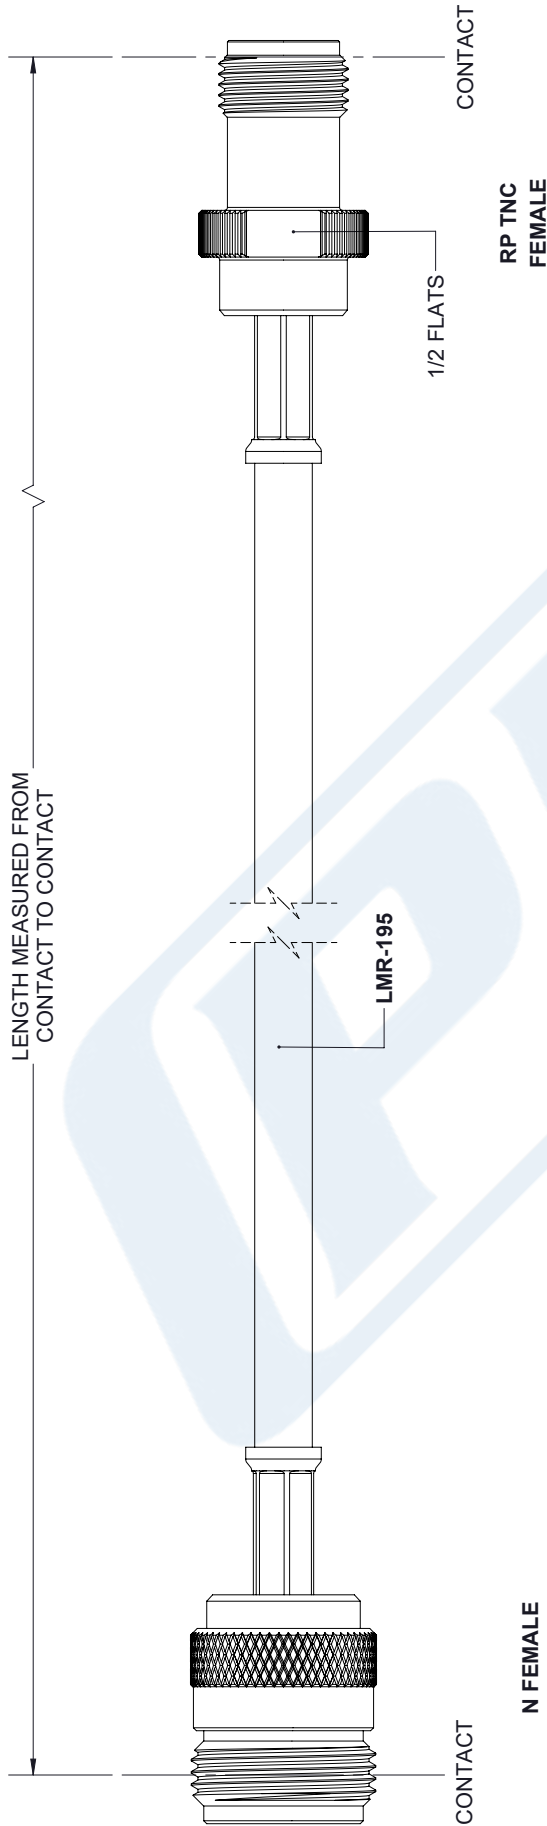

|                                                                                                  |             |
|--------------------------------------------------------------------------------------------------|-------------|
| UNLESS OTHERWISE SPECIFIED<br>LEADING DIMENSIONS ARE INCHES<br>DIMENSIONS IN [ ] ARE MILLIMETERS |             |
| TOLERANCES:                                                                                      | FRACTIONS   |
| X±.2 [5.08]                                                                                      | ±.132       |
| .XX±.01 [.25]                                                                                    | ±.132       |
| .XXX±.005 [.13]                                                                                  | ANGLES ± 1° |
| ALL DIMENSIONS SHOWN<br>ARE FOR REFERENCE ONLY.                                                  |             |
| THIRD-ANGLE PROJECTION                                                                           |             |



Pasternack Enterprises, Inc.  
P.O. Box 16759, Irvine, CA 92623.  
Phone: 1.949.261.1920 | 1.866.727.8376  
Fax: 1.949.261.7451  
www.pasternack.com | e-mail: sales@pasternack.com

THE INFORMATION AND  
DESIGN IN THIS DOCUMENT  
IS THE PROPERTY OF  
PASTERNAK CORPORATION.  
ALL RIGHTS RESERVED.

SHEET 1 OF 1  
SCALE N/A

|      |       |          |             |     |
|------|-------|----------|-------------|-----|
| SIZE | CAGE  | DRAWN BY | PART NUMBER | REV |
| A    | 53919 | K.DANG   | PE3W05123LF | A   |

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT  
ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.