



BNC Male to SMA Male Low Loss Cable
200 CM Length Using PE-C240 Coax

RF Cable Assemblies Technical Data Sheet


PE3W07719-200CM

Configuration

- Connector 1: BNC Male
- Connector 2: SMA Male
- Cable Type: PE-C240

Features

- Max Frequency 5.8 GHz
- Shielding Effectivity > 90 dB
- 84% Phase Velocity
- Double Shielded
- PE Jacket

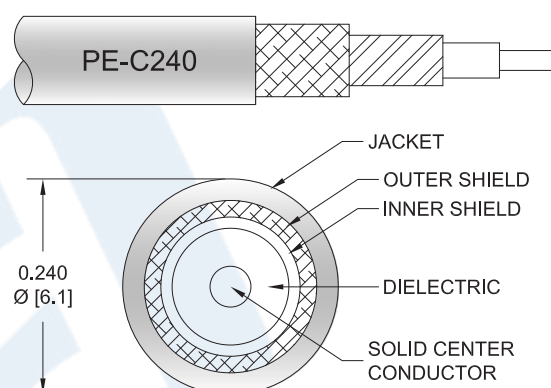

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W07719-200CM BNC male to SMA male 200 cm cable using PE-C240 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack BNC to SMA cable assembly has a male to male gender configuration with 50 ohm flexible PE-C240 coax. The PE3W07719-200CM BNC male to SMA male cable assembly operates to 5.8 GHz. The double shielding of this Pasternack cable assembly provides excellent shielding effectiveness of better than 90 dB.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMA Male Low Loss Cable 200 CM Length Using PE-C240 Coax PE3W07719-200CM](#)



BNC Male to SMA Male Low Loss Cable 200 CM Length Using PE-C240 Coax

RF Cable Assemblies Technical Data Sheet

PE3W07719-200CM

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
Velocity of Propagation		84		%
RF Shielding	90			dB
Capacitance		24.2 [79.4]		pF/ft [pF/m]
Jacket Spark			5,000	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.47	0.6	0.79	1.15	1.7	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Length*	78.74 in [200 cm]
Diameter	0.58 in [14.73 mm]

Cable

Cable Type	PE-C240
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PE (F)
Number of Shields	2
Shield Layer 1	Aluminum Tape
Shield Layer 2	Tinned Copper Braid
Jacket Material	PE, Black
Jacket Diameter	0.24 in [6.1 mm]
One Time Minimum Bend Radius	0.75 in [19.05 mm]
Repeated Minimum Bend Radius	2.5 in [63.5 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMA Male Low Loss Cable 200 CM Length Using PE-C240 Coax PE3W07719-200CM](#)



BNC Male to SMA Male Low Loss Cable
200 CM Length Using PE-C240 Coax

RF Cable Assemblies Technical Data Sheet

PE3W07719-200CM

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	SMA Male
Specification	MIL-STD-348	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Contact Plating Specification		ASTM B488
Dielectric Type	PTFE	Teflon
Body Material and Plating	Brass, Nickel	Passivated Stainless Steel
Body Plating Specification		SAE-AMS-2700
Coupling Nut Material and Plating	Brass, Nickel	Passivated Stainless Steel
Coupling Nut Plating Specification		SAE-AMS-2700

Environmental Specifications

Temperature

Operating Range

-40 to +85 deg C

Storage Range

-40 to +85 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMA Male Low Loss Cable 200 CM Length Using PE-C240 Coax PE3W07719-200CM](#)



BNC Male to SMA Male Low Loss Cable
200 CM Length Using PE-C240 Coax

RF Cable Assemblies Technical Data Sheet

PE3W07719-200CM

How to Order

Part Number Configuration:

PE3W07719

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W07719-12 = 12 inches long cable
PE3W07719-100cm = 100 cm long cable

BNC Male to SMA Male Low Loss Cable 200 CM Length Using PE-C240 Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [BNC Male to SMA Male Low Loss Cable 200 CM Length Using PE-C240 Coax PE3W07719-200CM](https://www.pasternack.com/bnc-male-sma-male-pe-c240-cable-assembly-pe3w07719-200cm-p.aspx)


URL: <https://www.pasternack.com/bnc-male-sma-male-pe-c240-cable-assembly-pe3w07719-200cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W07719-200CM CAD Drawing

BNC Male to SMA Male Low Loss Cable 200 CM Length Using PE-C240 Coax

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	3/10/2020	SELLIS

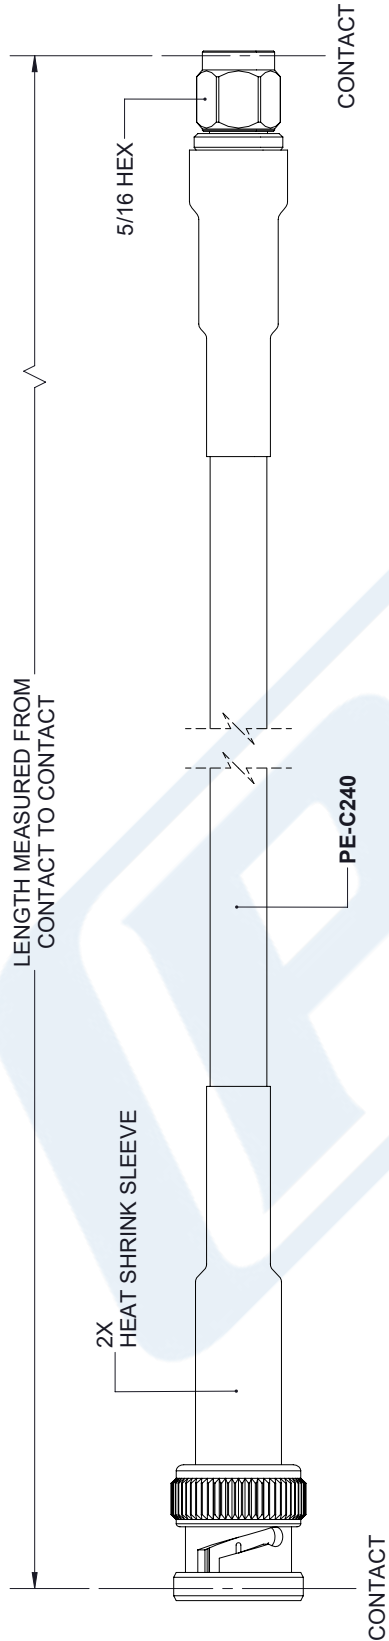

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: <table border="1"> <tr> <td>.X = ± .2</td><td>[5.08]</td><td>FRACTIONS</td><td>± 1/32</td></tr> <tr> <td>.XX = ± .02</td><td>[.51]</td><td>ANGLES ± 1°</td><td></td></tr> <tr> <td>.XXX = ± .005</td><td>[.13]</td><td>CABLE LENGTH (L) TOLERANCES:</td><td></td></tr> <tr> <td colspan="4">L ≤ 12 [305] = +1 [25] / -0</td></tr> <tr> <td colspan="4">12 [305] < L ≤ 60 [1524] = +2 [51] / -0</td></tr> <tr> <td colspan="4">60 [1524] < L ≤ 120 [3048] = +4 [102] / -0</td></tr> <tr> <td colspan="4">120 [3048] < L ≤ 300 [7620] = +6 [152] / -0</td></tr> <tr> <td colspan="4">300 [7620] < L = +5% L / -0</td></tr> </table> ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.		.X = ± .2	[5.08]	FRACTIONS	± 1/32	.XX = ± .02	[.51]	ANGLES ± 1°		.XXX = ± .005	[.13]	CABLE LENGTH (L) TOLERANCES:		L ≤ 12 [305] = +1 [25] / -0				12 [305] < L ≤ 60 [1524] = +2 [51] / -0				60 [1524] < L ≤ 120 [3048] = +4 [102] / -0				120 [3048] < L ≤ 300 [7620] = +6 [152] / -0				300 [7620] < L = +5% L / -0				THIRD-ANGLE PROJECTION THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED. SHEET 1 OF 1 SCALE N/A	
.X = ± .2	[5.08]	FRACTIONS	± 1/32																																
.XX = ± .02	[.51]	ANGLES ± 1°																																	
.XXX = ± .005	[.13]	CABLE LENGTH (L) TOLERANCES:																																	
L ≤ 12 [305] = +1 [25] / -0																																			
12 [305] < L ≤ 60 [1524] = +2 [51] / -0																																			
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0																																			
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0																																			
300 [7620] < L = +5% L / -0																																			
PE PASTERNAK an INFINITI brand Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com		SIZE A CAGE CODE 53919 DRAWN BY K.DANG ITEM NO. PE3W07719 REV A																																	

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.