



Plenum Rated SMA Female to SMA Male Low PIM Cable
Using SPP-250-LLPL Coax , LF Solder in 60 Inch

RF Cable Assemblies Technical Data Sheet


PE3W13535LF-60

Configuration

- Connector 1: SMA Female
- Connector 2: SMA Male
- Cable Type: SPP-250-LLPL

Features

- Max Frequency 5.8 GHz
- Low PIM: -155 dBc Max
- Shielding Effectivity > 100 dB
- 76% Phase Velocity
- FEP Jacket

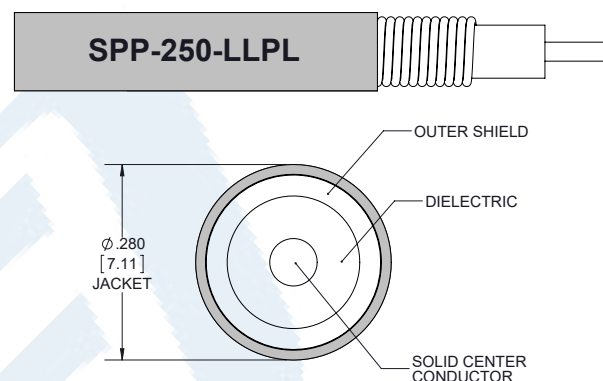

Applications

- General Purpose
- Laboratory Use
- Low PIM Applications

Description

Pasternack's PE3W13535LF-60 SMA female to SMA male cable using SPP-250-LLPL coax is part of our full line of RF components available for same-day shipping. Pasternack's corrugated RF cable assemblies are ideal for applications where durability and high power are needed. This Pasternack SMA to SMA cable assembly has a female to male gender configuration with 50 ohm corrugated SPP-250-LLPL coax. The PE3W13535LF-60 SMA female to SMA male cable assembly operates to 5.8 GHz. Our low PIM design also offers excellent passive intermodulation performance with PIM levels better than -155 dBc.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		5.8	GHz
VSWR			1.5:1	
Velocity of Propagation		76		%
RF Shielding	100			dB
Passive Intermodulation			-155	dBc

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum Rated SMA Female to SMA Male Low PIM Cable Using SPP-250-LLPL Coax , LF Solder in 60 Inch PE3W13535LF-60](#)



Plenum Rated SMA Female to SMA Male Low PIM Cable
Using SPP-250-LLPL Coax , LF Solder in 60 Inch

RF Cable Assemblies Technical Data Sheet

PE3W13535LF-60

Capacitance	27 [88.58]	pF/ft [pF/m]
Inductance	0.067 [0.22]	uH/ft [uH/m]
DC Resistance Inner Conductor	3 [9.84]	Ω/1000ft [Ω/Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.25	0.5	1	2.5	5.8	GHz
Insertion Loss (Typ.)	0.14	0.26	0.35	0.6	0.94	dB/ft
	0.46	0.85	1.15	1.97	3.08	dB/m

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.04*SQRT(FGHz) dB per connector.

Mechanical Specifications

Cable Assembly

Length*	60 in [152.4 cm]
Weight	0.326 lbs [147.87 g]

Cable

Cable Type	SPP-250-LLPL
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper
Dielectric Type	PTFE
Number of Shields	1
Outer Conductor Material and Plating	Copper
Jacket Material	FEP, Blue
Jacket Diameter	0.28 in [7.11 mm]
One Time Minimum Bend Radius	1.25 in [31.75 mm]
Bending Moment	0.8 lbs-ft [1.08 N-m]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum Rated SMA Female to SMA Male Low PIM Cable Using SPP-250-LLPL Coax , LF Solder in 60 Inch PE3W13535LF-60](#)



Plenum Rated SMA Female to SMA Male Low PIM Cable
Using SPP-250-LLPL Coax , LF Solder in 60 Inch

RF Cable Assemblies Technical Data Sheet

PE3W13535LF-60

Connectors

Description	Connector 1	Connector 2
Type	SMA Female	SMA Male
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Beryllium Copper, Silver	Brass, Silver
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Brass, Tri-Metal	
Body Material and Plating	Brass, Tri-Metal	Brass, Tri-Metal
Coupling Nut Material and Plating		Brass, Tri-Metal

Environmental Specifications

Temperature

Operating Range

-55 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum Rated SMA Female to SMA Male Low PIM Cable Using SPP-250-LLPL Coax , LF Solder in 60 Inch PE3W13535LF-60](#)



Plenum Rated SMA Female to SMA Male Low PIM Cable
Using SPP-250-LLPL Coax , LF Solder in 60 Inch

RF Cable Assemblies Technical Data Sheet

PE3W13535LF-60

How to Order

Part Number Configuration:

PE3W13535LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W13535LF-12 = 12 inches long cable
PE3W13535LF-100cm = 100 cm long cable

Plenum Rated SMA Female to SMA Male Low PIM Cable Using SPP-250-LLPL Coax , LF Solder in 60 Inch from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Plenum Rated SMA Female to SMA Male Low PIM Cable Using SPP-250-LLPL Coax , LF Solder in 60 Inch PE3W13535LF-60](https://www.pasternack.com/plenum-rated-sma-female-to-sma-male-low-pim-cable-using-spp-250-llpl-lf-solder-pe3w13535lf-60-p.aspx)


URL: <https://www.pasternack.com/plenum-rated-sma-female-to-sma-male-low-pim-cable-using-spp-250-llpl-lf-solder-pe3w13535lf-60-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W13535LF-60 CAD Drawing

Plenum Rated SMA Female to SMA Male Low PIM Cable
Using SPP-250-LLPL Coax , LF Solder in 60 Inch

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/10/2022	AGANWANI

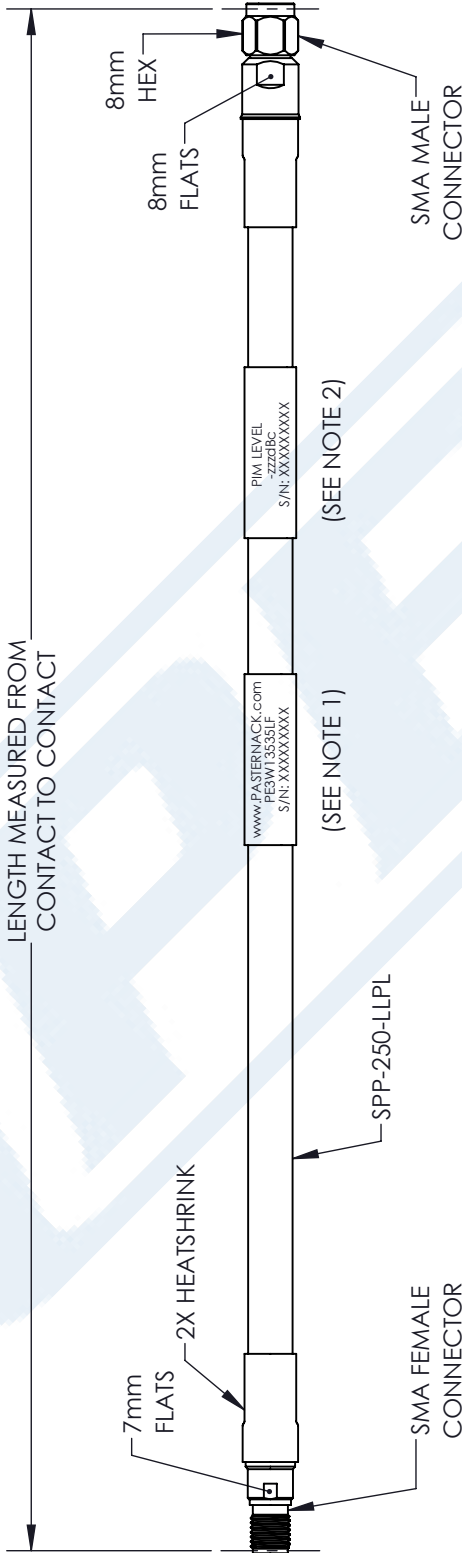

NOTES:

1. CABLES 84" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 84" HAVE 2 LABELS, ONE AT EACH END 12.0" FROM END OF CONNECTOR.
2. 6" FROM CABLE END, 1 PLACE, FOR ALL LENGTHS OF CABLE.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:
X = ±.2 [.51]
.XX = ±.02 [.51]
.XXX = ±.005 [.13]

FRACTIONS
± 1/32
ANGLES ± 1°

CABLE LENGTH (L) TOLERANCES:
L ≤ 12 [305] = +1 [25] / -0
12 [305] < L ≤ 60 [1524] = +2 [51] / -0
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0
300 [7620] < L = +5% / -0

ALL DIMENSIONS SHOWN
ARE FOR REFERENCE ONLY.

PE PASTERNAK
an INFINITI brand

Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com

SIZE A CAGE CODE 53919 DRAWN BY BPUCHASKI ITEM NO. PE3W13535LF

THIRD-ANGLE PROJECTION
THE INFORMATION AND
DESIGN IN THIS DOCUMENT
IS THE PROPERTY OF
PASTERNAK CORPORATION
ALL RIGHTS RESERVED.

SHEET 1 OF 1
SCALE N/A
REV A