



Push-On SMP Female to Smooth Bore SMP Male
Bulkhead Cable Using PE-SR405AL Coax in 100CM

RF Cable Assemblies Technical Data Sheet


PE3W13672-100CM

Configuration

- Connector 1: Push-OnSMP Female
- Connector 2: Smooth BoreSMP Male Bulkhead
- Cable Type: PE-SR405AL

Features

- Max Frequency 8 GHz

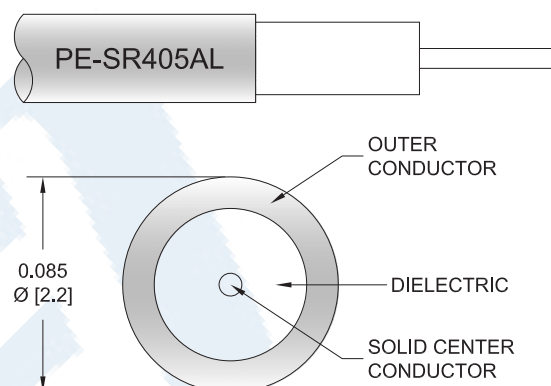

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3W13672-100CM SMP female push-on to SMP male smooth bore bulkhead cable using PE-SR405AL coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack SMP to SMP cable assembly has a female to male gender configuration with 50 ohm semi-rigid PE-SR405AL coax. The PE3W13672-100CM SMP female to SMP male cable assembly operates to 8 GHz. Our RF cable assembly with SMP bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female to Smooth Bore SMP Male Bulkhead Cable Using PE-SR405AL Coax in 100CM PE3W13672-100CM](#)



Push-On SMP Female to Smooth Bore SMP Male
Bulkhead Cable Using PE-SR405AL Coax in 100CM

RF Cable Assemblies Technical Data Sheet

PE3W13672-100CM

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		8	GHz
VSWR			1.5:1	

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2	4	8	GHz
Insertion Loss (Typ.)	0.58	0.96	1.16	1.58	2.44	dB/ft
	1.9	3.15	3.81	5.18	8.01	dB/m

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Length* 39.37 in [100 cm]

Weight 0.06 lbs [27.22 g]

Cable

Cable Type PE-SR405AL
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 1
 Outer Conductor Material and Plating Tinned Aluminum
 One Time Minimum Bend Radius 0.05 in [1.27 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female to Smooth Bore SMP Male Bulkhead Cable Using PE-SR405AL Coax in 100CM PE3W13672-100CM](#)



Push-On SMP Female to Smooth Bore SMP Male
Bulkhead Cable Using PE-SR405AL Coax in 100CM

RF Cable Assemblies Technical Data Sheet

PE3W13672-100CM

Connectors

Description	Connector 1	Connector 2
Type	SMP Female	SMP Male Bulkhead
Specification	MIL-STD-348A	MIL-STD-348
Impedance	50 Ohms	50 Ohms
Connection Method	Push-On	Smooth Bore
Contact Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Contact Plating Specification	MIL-DTL-45204	MIL-G-45204
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Beryllium Copper, Gold	
Outer Conductor Plating Specification	MIL-DTL-45204	
Body Material and Plating	Beryllium Copper, Gold	Beryllium Copper, Gold
Body Plating Specification	MIL-DTL-45204	MIL-G-45204

Environmental Specifications

Temperature

Operating Range -55 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female to Smooth Bore SMP Male Bulkhead Cable Using PE-SR405AL Coax in 100CM PE3W13672-100CM](#)



Push-On SMP Female to Smooth Bore SMP Male
Bulkhead Cable Using PE-SR405AL Coax in 100CM

RF Cable Assemblies Technical Data Sheet

PE3W13672-100CM

How to Order

Part Number Configuration:

PE3W13672

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3W13672-12 = 12 inches long cable
PE3W13672-100cm = 100 cm long cable

Push-On SMP Female to Smooth Bore SMP Male Bulkhead Cable Using PE-SR405AL Coax in 100CM from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Push-On SMP Female to Smooth Bore SMP Male Bulkhead Cable Using PE-SR405AL Coax in 100CM PE3W13672-100CM](https://www.pasternack.com/push-on-smp-female-to-smooth-bore-smp-male-bulkhead-cable-using-pe-sr405al-pe3w13672-100cm-p.aspx)

URL: <https://www.pasternack.com/push-on-smp-female-to-smooth-bore-smp-male-bulkhead-cable-using-pe-sr405al-pe3w13672-100cm-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3W13672-100CM CAD Drawing

Push-On SMP Female to Smooth Bore SMP Male Bulkhead Cable Using PE-SR405AL Coax in 100CM

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	08/10/2022	AGANWANI



UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: <table border="1"> <tr> <td>X = ± 2</td><td>[.008]</td><td>FRACTIONS</td><td>± 1/32</td></tr> <tr> <td>.XX = ± .02</td><td>[.51]</td><td>ANGLES</td><td>± 1°</td></tr> <tr> <td>.XXX = ± .005</td><td>[.13]</td><td>CABLE LENGTH (L)</td><td>TOLERANCES:</td></tr> <tr> <td colspan="4">L ≤ 12 [305] = +1 [25] / -0</td></tr> <tr> <td colspan="4">12 [305] < L ≤ 60 [1524] = +2 [51] / -0</td></tr> <tr> <td colspan="4">60 [1524] < L ≤ 120 [3048] = +4 [102] / -0</td></tr> <tr> <td colspan="4">120 [3048] < L ≤ 300 [7620] = +6 [152] / -0</td></tr> <tr> <td colspan="4">300 [7620] < L = +5% / -0</td></tr> </table> ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.		X = ± 2	[.008]	FRACTIONS	± 1/32	.XX = ± .02	[.51]	ANGLES	± 1°	.XXX = ± .005	[.13]	CABLE LENGTH (L)	TOLERANCES:	L ≤ 12 [305] = +1 [25] / -0				12 [305] < L ≤ 60 [1524] = +2 [51] / -0				60 [1524] < L ≤ 120 [3048] = +4 [102] / -0				120 [3048] < L ≤ 300 [7620] = +6 [152] / -0				300 [7620] < L = +5% / -0				THIRD-ANGLE PROJECTION THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED. SHEET 1 OF 1 SCALE N/A	
X = ± 2	[.008]	FRACTIONS	± 1/32																																
.XX = ± .02	[.51]	ANGLES	± 1°																																
.XXX = ± .005	[.13]	CABLE LENGTH (L)	TOLERANCES:																																
L ≤ 12 [305] = +1 [25] / -0																																			
12 [305] < L ≤ 60 [1524] = +2 [51] / -0																																			
60 [1524] < L ≤ 120 [3048] = +4 [102] / -0																																			
120 [3048] < L ≤ 300 [7620] = +6 [152] / -0																																			
300 [7620] < L = +5% / -0																																			
PE PASTERNAK an INFINITI® brand Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com		ITEM NO. PE3W13672																																	
SIZE A		DRAWN BY BPUCHASKI																																	
CAGE CODE 53919		REV A																																	

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.