



SMA Male Right Angle Connector Clamp/ Solder Attachment for PE-P160LL

RF Connectors Technical Data Sheet

PE45442

Configuration

- SMA Male Connector
- 50 Ohms
- Right Angle Body Geometry
- PE-P160LL Interface Type
- Clamp/Solder Attachment

Features

- Max. Operating Frequency 18 GHz
- Excellent VSWR of 1.16:1
- Gold Plated Beryllium Copper Contact
- Contact plating according to ASTM-B488

Applications

- General Purpose Test
- Custom Cable Assemblies

Description

Pasternack's PE45442 SMA male right angle connector with clamp/solder attachment for PE-P160LL is part of our full line of RF components available for same-day shipping. Our SMA male connector operates up to a maximum frequency of 18 GHz and offers excellent VSWR of 1.16:1. Its right angle body geometry allows for easier connections in tight spaces.

Our SMA male right angle connector PE45442 datasheet specifications and drawing with dimensions are shown below in this PDF. Pasternack's broad catalog of RF, microwave and millimeter wave connectors allows designers to configure and customize their signal connections however they like. Whether the need is to provide an I/O for a board design, or simply create a custom cable assembly configuration, Pasternack has the right connector for the job. Pasternack can also expertly build your custom cable assemblies for you and ship same-day.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		18	GHz
VSWR			1.16:1	
Dielectric Withstanding Voltage (AC)			1,000	Vrms

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle Connector Clamp/Solder Attachment for PE-P160LL PE45442](#)



SMA Male Right Angle Connector Clamp/
Solder Attachment for PE-P160LL

RF Connectors Technical Data Sheet

PE45442

Material Specifications

Description	Material	Plating
Contact	Beryllium Copper	Gold ASTM-B488
Insulation	PTFE	
Body	Passivated Stainless Steel	
Coupling Nut	Passivated Stainless Steel	
Gasket	Silicone Rubber	
Crimp Sleeve	Brass	Gold ASTM-B488

Environmental Specifications

Temperature

Operating Range -65 to +165 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle Connector Clamp/Solder Attachment for PE-P160LL PE45442](#)




SMA Male Right Angle Connector Clamp/ Solder Attachment for PE-P160LL

RF Connectors Technical Data Sheet


PE45442

Assembly Instruction


1. TRIM CABLE TO EXPOSE DIELECTRIC AND BRAIDS AS SHOWN.

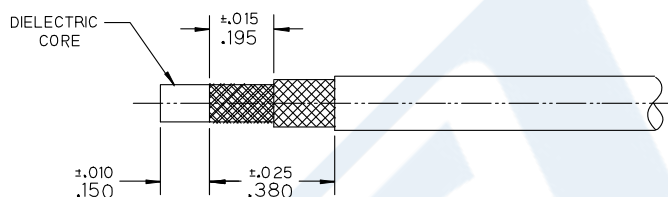

2.
 - A. SLIDE CLAMP NUT OVER CABLE IN ORIENTATION SHOWN.
 - B. INSERT CABLE INTO SOLDER FERRULE UNTIL INNER BRAID SEATS IN FERRULE. THEN SOLDER CABLE BRAIDS TO FERRULE WHERE SHOWN.
 - C. TRIM CABLE DIELECTRIC FLUSH WITH FACE OF SOLDER FERRULE. (DO NOT NICK CABLE CENTER CONDUCTOR).
 - D. SOLDER CONTACT WITH INDICATED GAP.

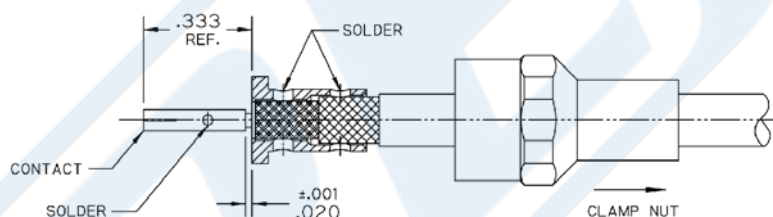

3. INSERT CABLE/CONTACT SUB-ASSEMBLY INTO CONNECTOR UNTIL SEATED AND TIGHTEN CLAMP NUT TO 35-45 IN-LBS.

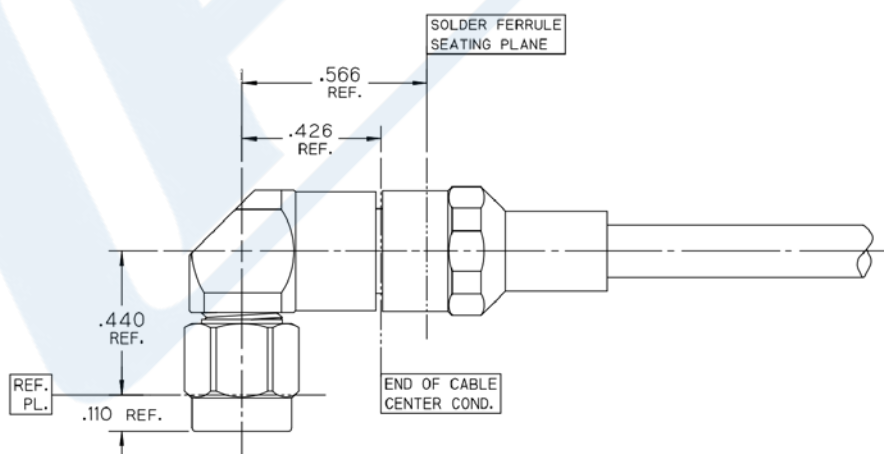

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle Connector Clamp/Solder Attachment for PE-P160LL PE45442](#)



SMA Male Right Angle Connector Clamp/ Solder Attachment for PE-P160LL

RF Connectors Technical Data Sheet

PE45442

SMA Male Right Angle Connector Clamp/Solder Attachment for PE-P160LL from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle Connector Clamp/Solder Attachment for PE-P160LL PE45442](https://www.pasternack.com/sma-male-pe-p160ll-connector-pe45442-p.aspx)

URL: <https://www.pasternack.com/sma-male-pe-p160ll-connector-pe45442-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE45442 CAD Drawing

SMA Male Right Angle Connector Clamp/Solder Attachment for PE-P160LL

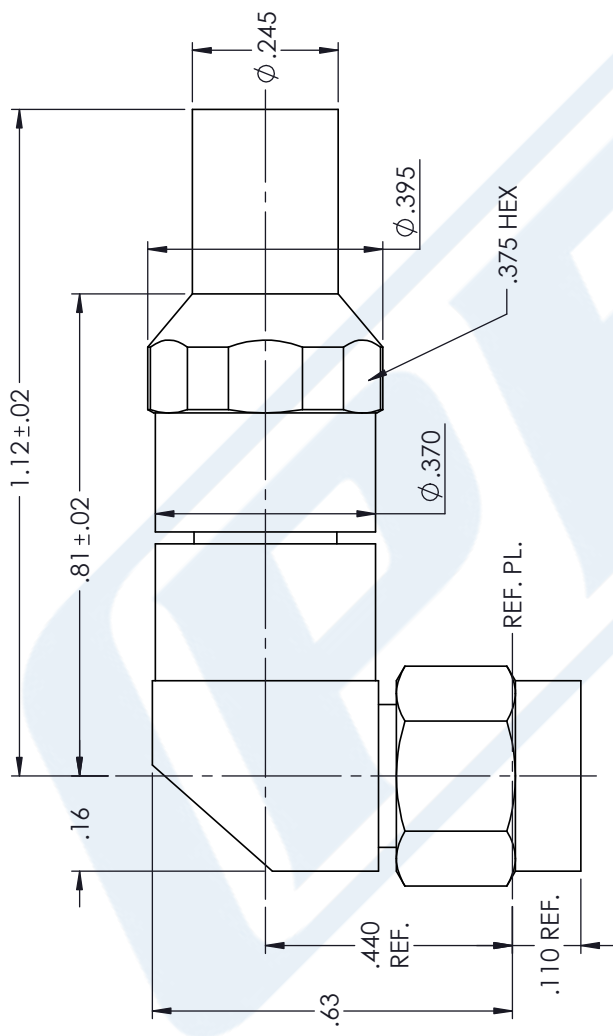

STANDARD TOLERANCES	
.X	±0.2
.XX	±0.01
.XXX	±0.005

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



PASTERNAK®
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE	PE45442
CAGE CODE	53919

NOTES: 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL. 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME. 3. DIMENSIONS ARE IN INCHES [mm].	CAD FILE	01/11/18	SCALE	N/A	SIZE	A	GF0006
---	----------	----------	-------	-----	------	---	--------