



## 2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna

### Antennas Technical Data Sheet

**PE51OM1006**

#### Features

- True 360 degree omni directional antennas which feature patent pending technology
- Dual polarity
- dual frequency feed system in single enclosure
- MIMO - Multiple-Input and Multiple-Output, separate inputs for 2.4 GHz and 5 GHz - four connectors total
- UV-Resistant radome for all-weather operation
- Heavy duty industrial grade design

#### Applications

- 2.4/5 GHz IEEE 802.11a/b/g and 802.11ac applications
- Supports 1x2, 2x2 and 4x4 MIMO AP/Routers
- WiMax, WISP and WiFi applications
- Wireless video systems
- Point-to-multipoint applications

#### Description

The HyperGain PE51OM1006 is a professional high gain dual band/dual polarity omnidirectional base station antenna designed and optimized for 2.4 and 5 GHz frequencies. This antenna is ideally suited for multipoint applications where long range and wide coverage is desired. The DPU series stands out from the competition since they are true 360 degree omni directional antennas which feature patent pending technology.

The PE51OM1006 is actually four antennas in one, a 2.4 GHz dual polarized antenna and a 5 GHz dual polarized antenna together in a single radome. Each frequency features separate feeds for both horizontal and vertical polarities, four N-Female connectors total. This antenna incorporates advanced dual polarization technology that allows for the interoperability of two radio transmit and receive paths. This technology allows for the attenuation of unwanted signals from adjacent channels and/or co-located equipment.

The PE51OM1006 construction features a heavy-duty UV resistant PVC radome for durability and aesthetics. Designed to operate in the harshest of environments, the PE51OM1006 far exceeds other omnidirectional antennas. The included mounting system features twin heavy-duty mounting clamps and bolts for superior strength.

#### Configuration

|                      |                     |
|----------------------|---------------------|
| Design               | Omni                |
| Band Type            | Dual                |
| Radiation Pattern    | Omni Directional    |
| Polarization         | Vertical/Horizontal |
| Connector Type       | N Female            |
| Interface 2          | N Female            |
| Interface 3          | N Female            |
| Interface 4          | N Female            |
| Number of Ports      | 4                   |
| Lightning Protection | DC Ground           |

#### Electrical Specifications

| Description     | Minimum | Typical | Maximum | Units |
|-----------------|---------|---------|---------|-------|
| Frequency Range | 2,400   |         | 5,900   | MHz   |
| Impedance       |         | 50      |         | Ohms  |
| Gain            |         | 6       |         | dBi   |
| Isolation       | 28      |         |         | dB    |
| Input Power     |         |         | 100     | Watts |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna PE51OM1006](#)



## 2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna

### Antennas Technical Data Sheet

**PE510M1006**

#### Specifications by Band

| Description           | Band 1     | Band 2     | Band 3 | Band 4 | Band 5 | Units   |
|-----------------------|------------|------------|--------|--------|--------|---------|
| Range                 | 2.4 to 2.5 | 5.1 to 5.9 |        |        |        | GHz     |
| Gain                  | 6          | 6          |        |        |        | dBi     |
| Horizontal Beam Width | 360        | 360        |        |        |        | Degrees |
| Vertical Beam Width   | 25         | 25         |        |        |        | Degrees |
| VSWR Max              | 1.6:1      | 1.8:1      |        |        |        |         |
| Maximum Input Power   | 250        | 100        |        |        |        | Watts   |

#### Mechanical Specifications

Radome Material

PVC

##### Size

Radome Diameter

2.9 in [73.66 mm]

Overall Length

28.2 in [716.28 mm]

Width

2.9 in [73.66 mm]

Height

2.9 in [73.66 mm]

Mounting Mast Diameter

1.6 to 3.5 in [40.64 to 88.90 mm]

Weight

5.8 lbs [2.63 kg]

Mechanical Specification Notes:

Radome material is UV resistant PVC.

#### Environmental Specifications

##### Temperature

Operating Range

-40 to +60 deg C

Wind Loading

130 MPH [209.21 KPH]

#### Compliance Certifications (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna PE510M1006](#)

## 2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna




### Antennas Technical Data Sheet


**PE510M1006**

#### RF Antenna Patterns


##### Horizontal Polarization




**H-Plane: 2400 MHz**




**V-Plane: 2400 MHz**




**H-Plane: 2450 MHz**



**V-Plane: 2450 MHz**



**H-Plane: 2500 MHz**



**V-Plane: 2500 MHz**

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna PE510M1006](#)


## 2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna




### Antennas Technical Data Sheet

**PE510M1006**


#### Horizontal Polarization




**H-Plane: 5100 MHz**




**V-Plane: 5100 MHz**




**H-Plane: 5500 MHz**



**V-Plane: 5500 MHz**



**H-Plane: 5800 MHz**



**V-Plane: 5800 MHz**

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna PE510M1006](#)


## 2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna




### Antennas Technical Data Sheet

**PE510M1006**


#### Vertical Polarization




**H-Plane: 2400 MHz**




**V-Plane: 2400 MHz**




**H-Plane: 2450 MHz**



**V-Plane: 2450 MHz**



**H-Plane: 2500 MHz**



**V-Plane: 2500 MHz**

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna PE510M1006](#)


## 2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna




### Antennas Technical Data Sheet

**PE510M1006**


#### Vertical Polarization




**H-Plane: 5100 MHz**




**V-Plane: 5100 MHz**




**H-Plane: 5500 MHz**



**V-Plane: 5500 MHz**



**H-Plane: 5800 MHz**



**V-Plane: 5800 MHz**

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna PE510M1006](#)





## 2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna

### Antennas Technical Data Sheet

**PE51OM1006**

2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna PE51OM1006](https://www.pasternack.com/dual-antenna-6-dbi-gain-n-pe51om1006-p.aspx)

URL: <https://www.pasternack.com/dual-antenna-6-dbi-gain-n-pe51om1006-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE51OM1006 CAD Drawing  
2.4/ 5 GHz 6 dBi Dual Band / Dual Polarized Omni Antenna

| REVISIONS |                 |           |          |
|-----------|-----------------|-----------|----------|
| REV.      | DESCRIPTION     | DATE      | APPROVED |
| A         | INITIAL RELEASE | 2/13/2020 | M.MILLER |

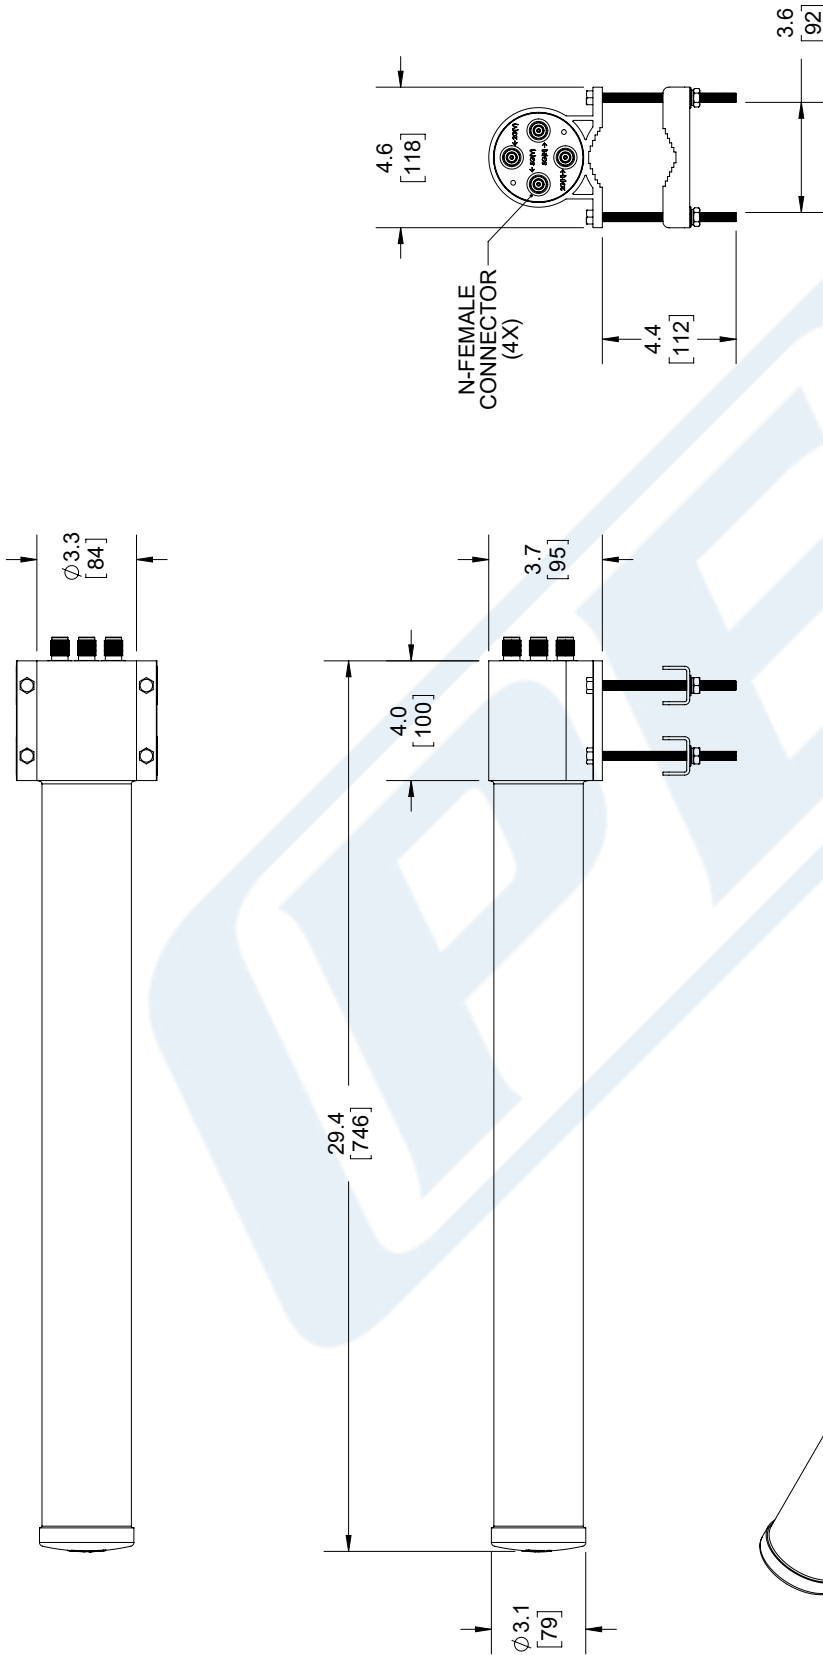

|  |                  |
|--|------------------|
| UNLESS OTHERWISE SPECIFIED<br>LEADING DIMENSIONS ARE INCHES<br>DIMENSIONS IN [ ] ARE MILLIMETERS |                  |
| TOLERANCES:  |                  |
| .X = ± .2 [5.08]   | FRACTIONS ± 1/32 |
| .XX = ± .02 [.51]  | ANGLES ± 1°      |
| .XXX = ± .005 [.13]  |                  |
| CABLE LENGTH (L) TOLERANCES:   |                  |
| L ≤ 12 [305] = +1 [25] / -0  |                  |
| 12 [305] < L ≤ 60 [1524] = +2 [51] / -0  |                  |
| 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0   |                  |
| 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0  |                  |
| 300 [7620] < L = +5% L / -0  |                  |
| ALL DIMENSIONS SHOWN<br>ARE FOR REFERENCE ONLY.  |                  |

|   |      |
|---|------|
| THIRD-ANGLE PROJECTION  |      |
| THE INFORMATION AND<br>DESIGN IN THIS DOCUMENT<br>IS THE PROPERTY OF<br>PASTERNAK CORPORATION<br>ALL RIGHTS RESERVED. |      |
| SHEET 1   | OF 1 |
| SCALE   | N/A  |
| REV   | A    |

|   |            |
|---|------------|
| <b>PE PASTERNAK</b><br>an INFINITI brand  |            |
| Pasternack Enterprises, Inc.<br>P.O. Box 16759, Irvine, CA 92623.<br>Phone: 1.949.261.1920   1.866.727.8376<br>Fax: 1.949.261.7451<br>Website: www.pasternack.com<br>E-mail: sales@pasternack.com |            |
| SIZE  | ITEM NO.   |
| A   | PE51OM1006 |
| CAGE CODE   | DRAWN BY   |
| 53919   | K.DANG     |

REGULATORY COMPLIANCE:

EU RoHS Directive (Most Recent Released Version)

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.