



2 dB Fixed Attenuator, 75 Ohm F Male to 75 Ohm F Female
Brass Nickel Body Rated to 2 Watts Up to 1,000 MHz

RF Fixed Attenuators Technical Data Sheet

PE7057-2

Features

- Bidirectional
- DC to 1 GHz Frequency Range
- Attenuation 2±0.5 dB
- Max Power 2 Watts (CW)
- VSWR < 1.3:1

Applications

- Instrumentation
- Precision measurements
- Prototyping and characterization
- Production systems

Description

Pasternack carries a wide range of fixed attenuators with a broad selection of attenuation levels, frequency ranges, and power dissipation ranges. RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuator pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Pasternack carries one of the largest in-stock varieties and ships them same day. The 2 dB Fixed Attenuator PE7057-2 is rated to 2 Watts and operates from DC to 1,000 MHz. The versatile coaxial package uses F male to F female connectors and is also REACH and RoHS compliant.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz
Impedance		75		Ohms
Nominal Attenuation		2		dB
Attenuation Accuracy		±0.5		dB
VSWR			1.3:1	
Input Power, CW			2	Watts

Mechanical Specifications

Size	
Length	1.47 in [37.34 mm]
Width/Diameter	0.44 in [11.18 mm]
Weight	0.034 lbs [15.42 g]
Body Material and Plating	Brass, Nickel

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 dB Fixed Attenuator, 75 Ohm F Male to 75 Ohm F Female Brass Nickel Body Rated to 2 Watts Up to 1,000 MHz PE7057-2](#)



2 dB Fixed Attenuator, 75 Ohm F Male to 75 Ohm F Female
Brass Nickel Body Rated to 2 Watts Up to 1,000 MHz

RF Fixed Attenuators Technical Data Sheet

PE7057-2

Configuration

Design
Package Style

Fixed, Bidirectional
Connectorized Module

Connectors

Description	Connector 1	Connector 2
Type	F Male	F Female
Hex Size	7/16 in.	
Torque	15 in-lbs 1.7 Nm	

Environmental Specifications

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant

REACH Compliant

12/17/2015

Plotted and Other Data

Notes:

2 dB Fixed Attenuator, 75 Ohm F Male to 75 Ohm F Female Brass Nickel Body Rated to 2 Watts Up to 1,000 MHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [2 dB Fixed Attenuator, 75 Ohm F Male to 75 Ohm F Female Brass Nickel Body Rated to 2 Watts Up to 1,000 MHz PE7057-2](http://www.pasternack.com/2db-fixed-f-male-f-female-2-watts-attenuator-pe7057-2)

URL: <http://www.pasternack.com/2db-fixed-f-male-f-female-2-watts-attenuator-pe7057-2-p.aspx>

PE7057-2 CAD Drawing

2 dB Fixed Attenuator, 75 Ohm F Male to 75 Ohm F Female
Brass Nickel Body Rated to 2 Watts Up to 1,000 MHz

P/N	ATTEN.	FIGURE
PE7057-1	1 dB	1
PE7057-2	2 dB	1
PE7057-3	3 dB	1
PE7057-6	6 dB	1
PE7057-10	10 dB	1

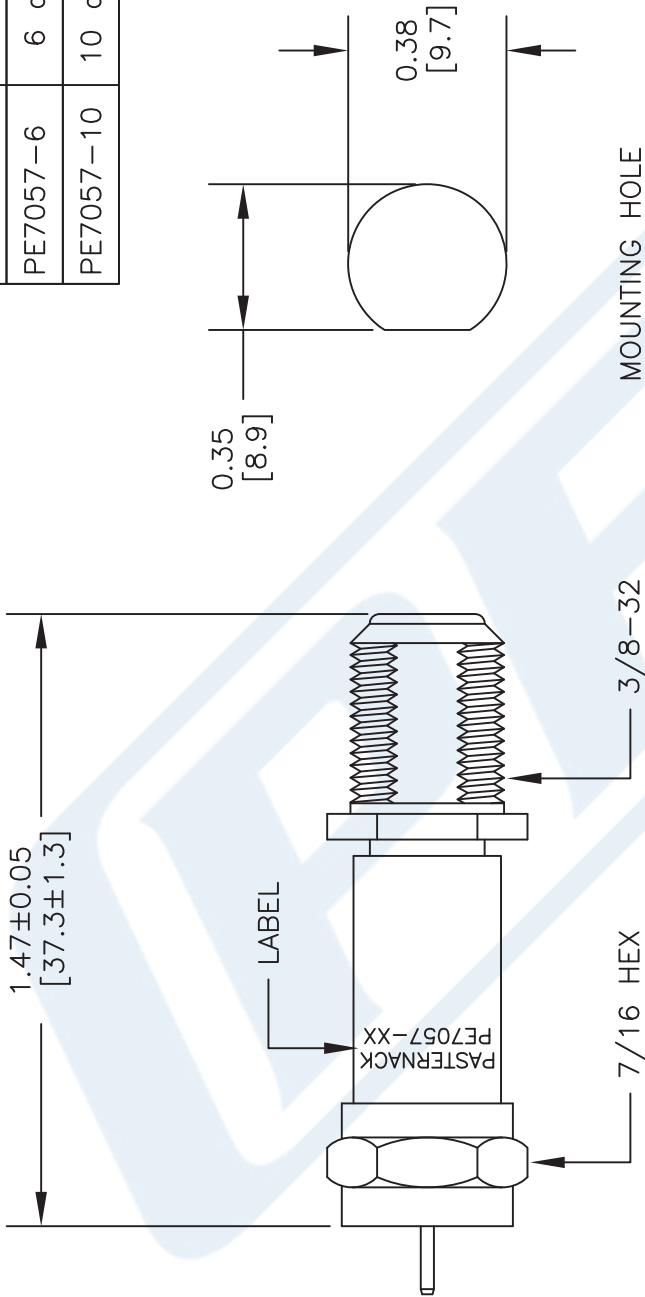


FIGURE 1

STANDARD TOLERANCES
.X ±0.2
.XX ±0.1
.XXX ±0.05

*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES

PE PASTERNAK®
THE ENGINEER'S RF SOURCE
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE
PE7057
FSCM NO. 53919

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

CAD FILE	022916	SCALE	N/A	SIZE	A	3045
----------	--------	-------	-----	------	---	------