



SP4T E-M Relay Latching Switch, Self Cut-Off,
Terminated, DC to 26.5 GHz, 90W, 5M Lifecycles,
28V, Indicators, TTL, Suppression Diodes, SMA

Electromechanical Relay Switches Technical Data Sheet

PE71S6474

Features

- Singel Pole Four Throw Electromechanical Relay Switch
- DC to 26.5 GHz Frequency Range
- Latching Actuator with Self Cut-Off
- TTL Logic Control
- Suppression Diodes
- Indicators
- 5M Lifecycle Rating
- Insertion Loss 0.3 dB typ
- Isolation > 85 dB typ
- Internally Terminated
- VSWR as low as 1.2:1 max
- +28 Volt DC Bias
- Solder Terminal Pins for DC Command Control
- SMA Female Connectors
- -25°C to +65°C Operating Temperature
- Up to 90 Watt Average Power Handling
- 50 Ohm Design
- Hot Switching Capability - Consult Factory
- S-Parameter Data available upon request
- Rugged Design meets Mil-STD-202 Test Conditions

Applications

- Aerospace & Defense
- Test & Measurement
- Microwave Radio Systems
- Military & Commercial Communication Systems
- Research & Development
- SATCOM
- Wireless Communications
- Enterprise
- IoT

Description

The PE71S6474 is a Single Pole Four Throw electromechanical relay switch that operates across a wide frequency range of DC to 26.5 GHz and can handle up to 90 Watts of Average power in a break before make condition. The design is rated for 5 million lifecycles and features a Latching Self Cut-Off Actuator that magnetically latches in place after the control voltage is removed. For power sensitive applications, this is the best actuator option. The output ports are terminated in 50 ohms when switched in the isolation (off) state. Additional features include TTL control logic, suppression diodes which limit voltage spikes or reverse current, and indicators. Impressive typical performance includes 0.3 dB insertion loss and isolation greater than 85 dB. This switch requires +28Vdc bias voltage and operates over a temperature range of -25°C to +65°C. The rugged and compact package assembly supports SMA female connectors and solder terminal pins for DC command control functions. And for highly reliable operation, the model is guaranteed to meet MIL-STD-202 environmental test conditions for shock and random vibration.

Electrical Specifications

Switch Type	SP4T, Terminated
Actuator Type	Latching
Switching Sequence	Break Before Make
Actuator Options	Self Cut Off, Indicators, TTL Logic, Solder Pins
TTL Control	on: 2.4 to 5 Volts off: 0 to 0.8 Volts

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		26.5	GHz
Impedance		50		Ohms
Operating Voltage	26	28	30	Volts

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T E-M Relay Latching Switch, Self Cut-Off, Terminated, DC to 26.5 GHz, 90W, 5M Lifecycles, 28V, Indicators, TTL, Suppression Diodes, SMA PE71S6474](#)



SP4T E-M Relay Latching Switch, Self Cut-Off,
Terminated, DC to 26.5 GHz, 90W, 5M Lifecycles,
28V, Indicators, TTL, Suppression Diodes, SMA

Electromechanical Relay Switches Technical Data

PE71S6474

Actuating Set Current @ 28 Volts @ 28V AND 20°C	110	mA
Actuating Reset Current	440	mA
VSWR	1.3:1	1.7:1
Insertion Loss	0.3	0.7
Isolation	70	85
Switching Time	20	ms Max

Performance by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency Range	DC to 6	6 to 12	12 to 18	18 to 26.5		GHz
VSWR, Max	1.2:1	1.3:1	1.4:1	1.7:1		
Insertion Loss, Max	0.15	0.25	0.4	0.7		dB
Isolation, Min	80	80	80	70		dB

Mechanical Specifications

Size

Length	2.52 in [64.01 mm]
Width/Diameter	2.25 in [57.15 mm]
Height	2.25 in [57.15 mm]
Finish	NICKEL
Package Type	Connectorized
Operating Life	5,000,000 Cycles

Connectors

RF Connector Type	SMA Female
-------------------	------------

Environmental Specifications

Temperature

Operating Range	-25 to +65 deg C
Storage Range	-55 to +100 deg C

Humidity
Shock

Moisture resistant or immersion sealing available
MIL-STD-202 Method 213, Condition D, 500G (non oper)

Vibration

MIL-STD-202 Method 214, Condition D, 10G RMS (non oper)

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T E-M Relay Latching Switch, Self Cut-Off, Terminated, DC to 26.5 GHz, 90W, 5M Lifecycles, 28V, Indicators, TTL, Suppression Diodes, SMA PE71S6474](#)



SP4T E-M Relay Latching Switch, Self Cut-Off,
Terminated, DC to 26.5 GHz, 90W, 5M Lifecycles,
28V, Indicators, TTL, Suppression Diodes, SMA

Electromechanical Relay Switches Technical Data


PE71S6474

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Typical Performance Data

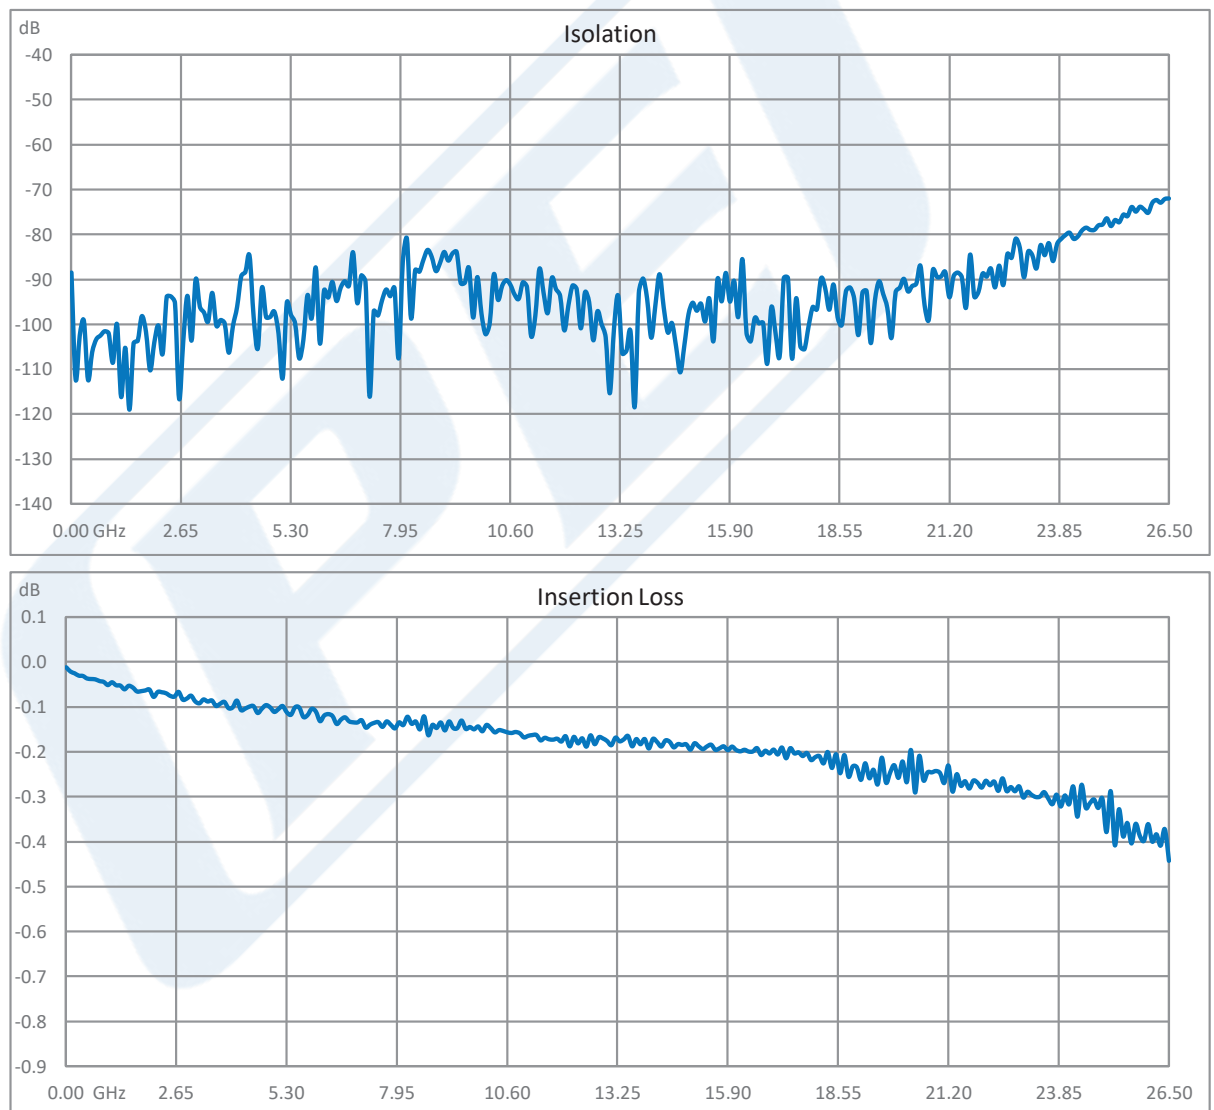


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T E-M Relay Latching Switch, Self Cut-Off, Terminated, DC to 26.5 GHz, 90W, 5M Lifecycles, 28V, Indicators, TTL, Suppression Diodes, SMA PE71S6474](#)



SP4T E-M Relay Latching Switch, Self Cut-Off,
Terminated, DC to 26.5 GHz, 90W, 5M Lifecycles,
28V, Indicators, TTL, Suppression Diodes, SMA

Electromechanical Relay Switches Technical Data

PE71S6474

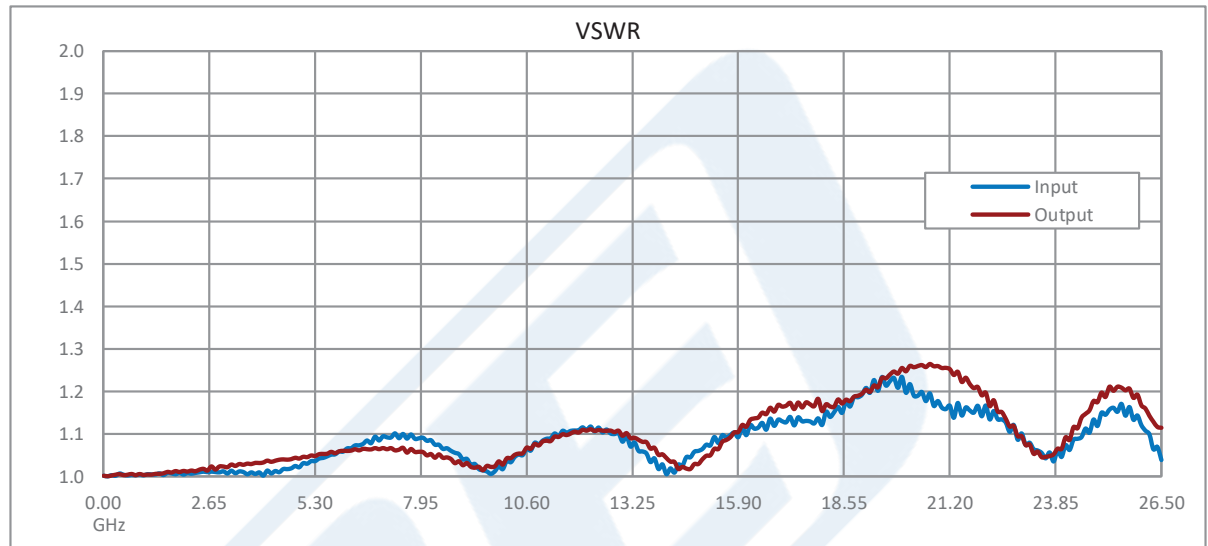



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T E-M Relay Latching Switch, Self Cut-Off, Terminated, DC to 26.5 GHz, 90W, 5M Lifecycles, 28V, Indicators, TTL, Suppression Diodes, SMA PE71S6474](#)



SP4T E-M Relay Latching Switch, Self Cut-Off,
Terminated, DC to 26.5 GHz, 90W, 5M Lifecycles,
28V, Indicators, TTL, Suppression Diodes, SMA

Electromechanical Relay Switches Technical Data

PE71S6474

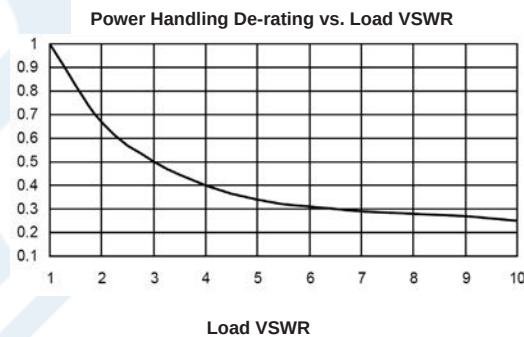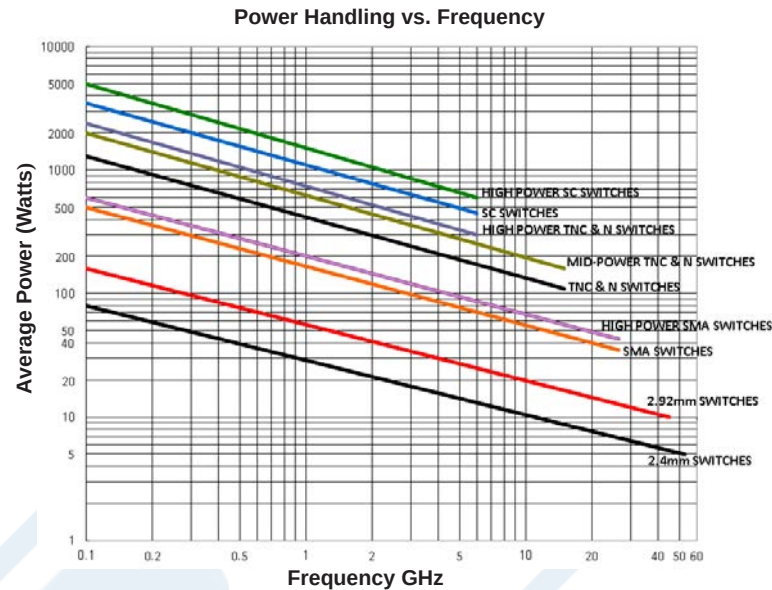

Power Handling Chart and Derating Curves based on the following Test and Environmental Conditions:
 Ambient temperature: 20 - 25°C
 Altitude: Sea Level to 1,000 feet
 Relative Humidity: 50 - 55%
 Load VSWR: $\leq 1.20:1$
 Operation: Cold Switching

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T E-M Relay Latching Switch, Self Cut-Off, Terminated, DC to 26.5 GHz, 90W, 5M Lifecycles, 28V, Indicators, TTL, Suppression Diodes, SMA PE71S6474](#)



SP4T E-M Relay Latching Switch, Self Cut-Off,
Terminated, DC to 26.5 GHz, 90W, 5M Lifecycles,
28V, Indicators, TTL, Suppression Diodes, SMA

Electromechanical Relay Switches Technical Data

PE71S6474

SP4T E-M Relay Latching Switch, Self Cut-Off, Terminated, DC to 26.5 GHz, 90W, 5M Lifecycles, 28V, Indicators, TTL, Suppression Diodes, SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SP4T E-M Relay Latching Switch, Self Cut-Off, Terminated, DC to 26.5 GHz, 90W, 5M Lifecycles, 28V, Indicators, TTL, Suppression Diodes, SMA PE71S6474](https://www.pasternack.com/sp4t-electromechanical-relay-latching-switch-terminated-26.5-ghz-28v-indicators-ttl-sma-pe71s6474-p.aspx)

URL: <https://www.pasternack.com/sp4t-electromechanical-relay-latching-switch-terminated-26.5-ghz-28v-indicators-ttl-sma-pe71s6474-p.aspx>



The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE71S6474 CAD Drawing

SP4T E-M Relay Latching Switch, Self Cut-Off, Terminated, DC to 26.5 GHz,
90W, 5M Lifecycles, 28V, Indicators, TTL, Suppression Diodes, SMA

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	2/1/2021	T.GALLA

12X SOLDER TERMINALS,
SOLDER WIRE USING SN96,
MAXIMUM TEMP 250°C FOR
NO MORE THAN 5 SEC.

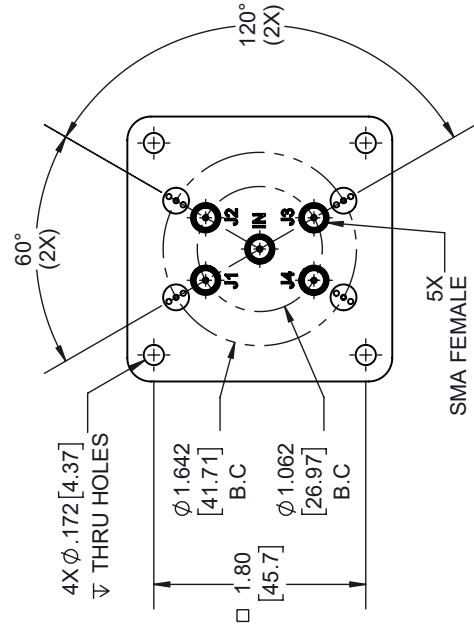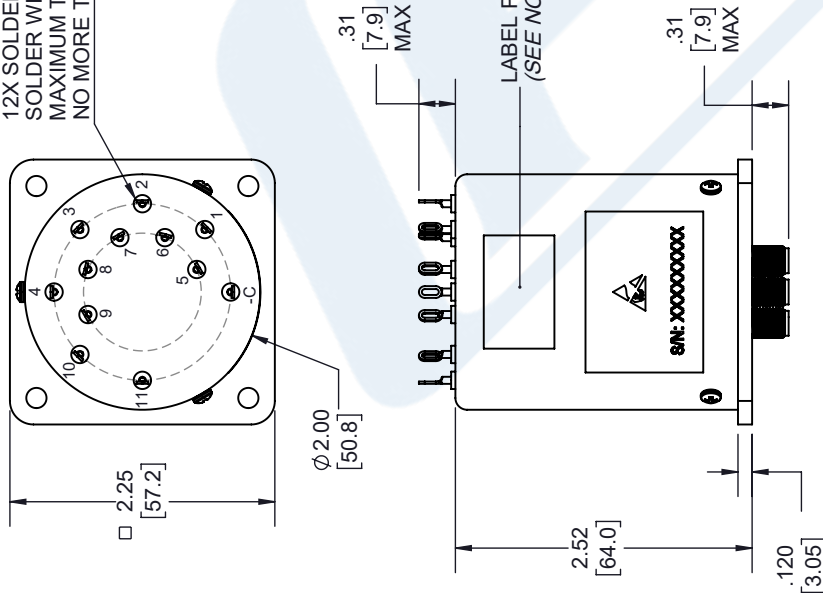

NOTES:

1. LABEL PER ILS-100-02. FOR INTERNAL REFERENCE ONLY.
LABEL LOCATION FOR REFERENCE ONLY.

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:	
X = ± 2	[5.08]
.XX = ± 0.2	[5.1]
.XXX = ± 0.005	[.13]
CABLE LENGTH (L) TOLERANCES:	
L ≤ 12 [305]	± 1/32
12 [305] < L ≤ 60 [1524]	± 1/16
60 [1524] < L ≤ 120 [3048]	± 1/8
120 [3048] < L ≤ 300 [7620]	± 1/4
300 [7620] < L	± 5%
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.	



Pasternack Enterprises, Inc.
P.O. Box 16759, Irvine, CA 92623.
Phone: 1.949.261.1920 | 1.866.727.8376
Fax: 1.949.261.7451
Website: www.pasternack.com
E-mail: sales@pasternack.com



THIRD-ANGLE PROJECTION	
THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.	
SHEET	1 OF 2
SCALE	N/A
REV	A

SIZE	A
CAGE CODE	53919
DRAWN BY	K.DANG
ITEM NO.	PE71S6474

