



## 3 dB Fixed Attenuator, SMA Female to TNC Male Black Anodized Aluminum Heatsink Body Rated to 25 Watts Up to 18 GHz

### RF Fixed Attenuators Technical Data Sheet

**PE7365-3**

#### Description

Pasternack carries a wide range of fixed attenuators with a broad selection of attenuation levels, frequency ranges, and power dissipation ranges. RF microwave attenuators (also known as RF pads) lower the amplitude of a signal (attenuate) a known amount and can be used in a wide variety of applications. These attenuator pads are used when a signal needs to be reduced to protect measurement equipment or other circuitry, to extend the range of power meters and amplifiers, and to impedance match circuits by reducing the VSWR seen by adjacent components. RF attenuators can prevent signal overload in amplifiers, receivers and detectors, adjusting the signal level to a range that is optimal.

Few RF components are as commonly used as fixed coaxial attenuators, and Pasternack carries one of the largest in-stock varieties and ships them same day. The 3 dB Fixed Attenuator PE7365-3 is rated to 25 Watts and operates from DC to 18 GHz. The versatile coaxial package uses SMA female to TNC male connectors and is also REACH and RoHS compliant. The Black Anodized Aluminum Heatsink body allows for efficient heat dissipation under high power usage conditions.

#### Electrical Specifications

| Description         | Minimum | Typical | Maximum | Units |
|---------------------|---------|---------|---------|-------|
| Frequency Range     | DC      |         | 18      | GHz   |
| Impedance           |         | 50      |         | Ohms  |
| Nominal Attenuation |         | 3       |         | dB    |
| VSWR                |         |         | 1.6:1   |       |
| Input Power, CW     |         |         | 25      | Watts |
| Input Power, Peak   |         |         | 500     | Watts |

#### Specifications by Frequency

| Description               | F1      | F2        | F3         | F4 | F5 | Units |
|---------------------------|---------|-----------|------------|----|----|-------|
| Range                     | DC to 6 | 6 to 12.4 | 12.4 to 18 |    |    | GHz   |
| VSWR, Max                 | 1.3:1   | 1.45:1    | 1.6:1      |    |    |       |
| Attenuation Accuracy, Typ | 0.5     | 0.75      | 1          |    |    | dB    |
| Input Power, CW           | 25      |           |            |    |    | Watts |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3 dB Fixed Attenuator, SMA Female to TNC Male Black Anodized Aluminum Heatsink Body Rated to 25 Watts Up to 18 GHz PE7365-3](#)



3 dB Fixed Attenuator, SMA Female to TNC Male Black Anodized  
Aluminum Heatsink Body Rated to 25 Watts Up to 18 GHz

## RF Fixed Attenuators Technical Data Sheet

**PE7365-3**

### Mechanical Specifications

**Size**

|                           |                                  |
|---------------------------|----------------------------------|
| Length                    | 4.5 in [114.3 mm]                |
| Width/Diameter            | 2.41 in [61.21 mm]               |
| Weight                    | 0.8 lbs [362.87 g]               |
| Body Material and Plating | Black Anodized Aluminum Heatsink |

**Configuration**

|        |                      |
|--------|----------------------|
| Design | Fixed, Bidirectional |
|--------|----------------------|

**Connectors**

| Description                          | Connector 1                 | Connector 2                 |
|--------------------------------------|-----------------------------|-----------------------------|
| Type                                 | SMA Female                  | TNC Male                    |
| Contact Material and Plating         | Beryllium Copper, Gold      | Beryllium Copper, Gold      |
| Contact Plating Specification        | Gold                        |                             |
| Outer Conductor Material and Plating |                             | Stainless Steel, Passivated |
| Coupling Nut Material and Plating    | Stainless Steel, Passivated |                             |
| Coupling Nut Plating Specification   | Stainless Steel             |                             |
| Hex Size                             | 11/16 In.                   | 11/16 In.                   |
| Body Material and Plating            | Stainless Steel, Passivated | Stainless Steel, Passivated |
| Body Plating Specification           | Passivated                  |                             |

### Environmental Specifications

**Temperature**

|                 |                   |
|-----------------|-------------------|
| Operating Range | -55 to +125 deg C |
|-----------------|-------------------|

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

**Notes:**


3 dB Fixed Attenuator, SMA Female to TNC Male Black Anodized Aluminum Heatsink Body Rated to 25 Watts Up to 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3 dB Fixed Attenuator, SMA Female to TNC Male Black Anodized Aluminum Heatsink Body Rated to 25 Watts Up to 18 GHz PE7365-3](#)

URL: <https://www.pasternack.com/3db-fixed-sma-female-tnc-female-25-watts-attenuator-pe7365-3-p.aspx>

# PE7365-3 CAD Drawing

3 dB Fixed Attenuator, SMA Female to TNC Male Black Anodized  
Aluminum Heatsink Body Rated to 25 Watts Up to 18 GHz

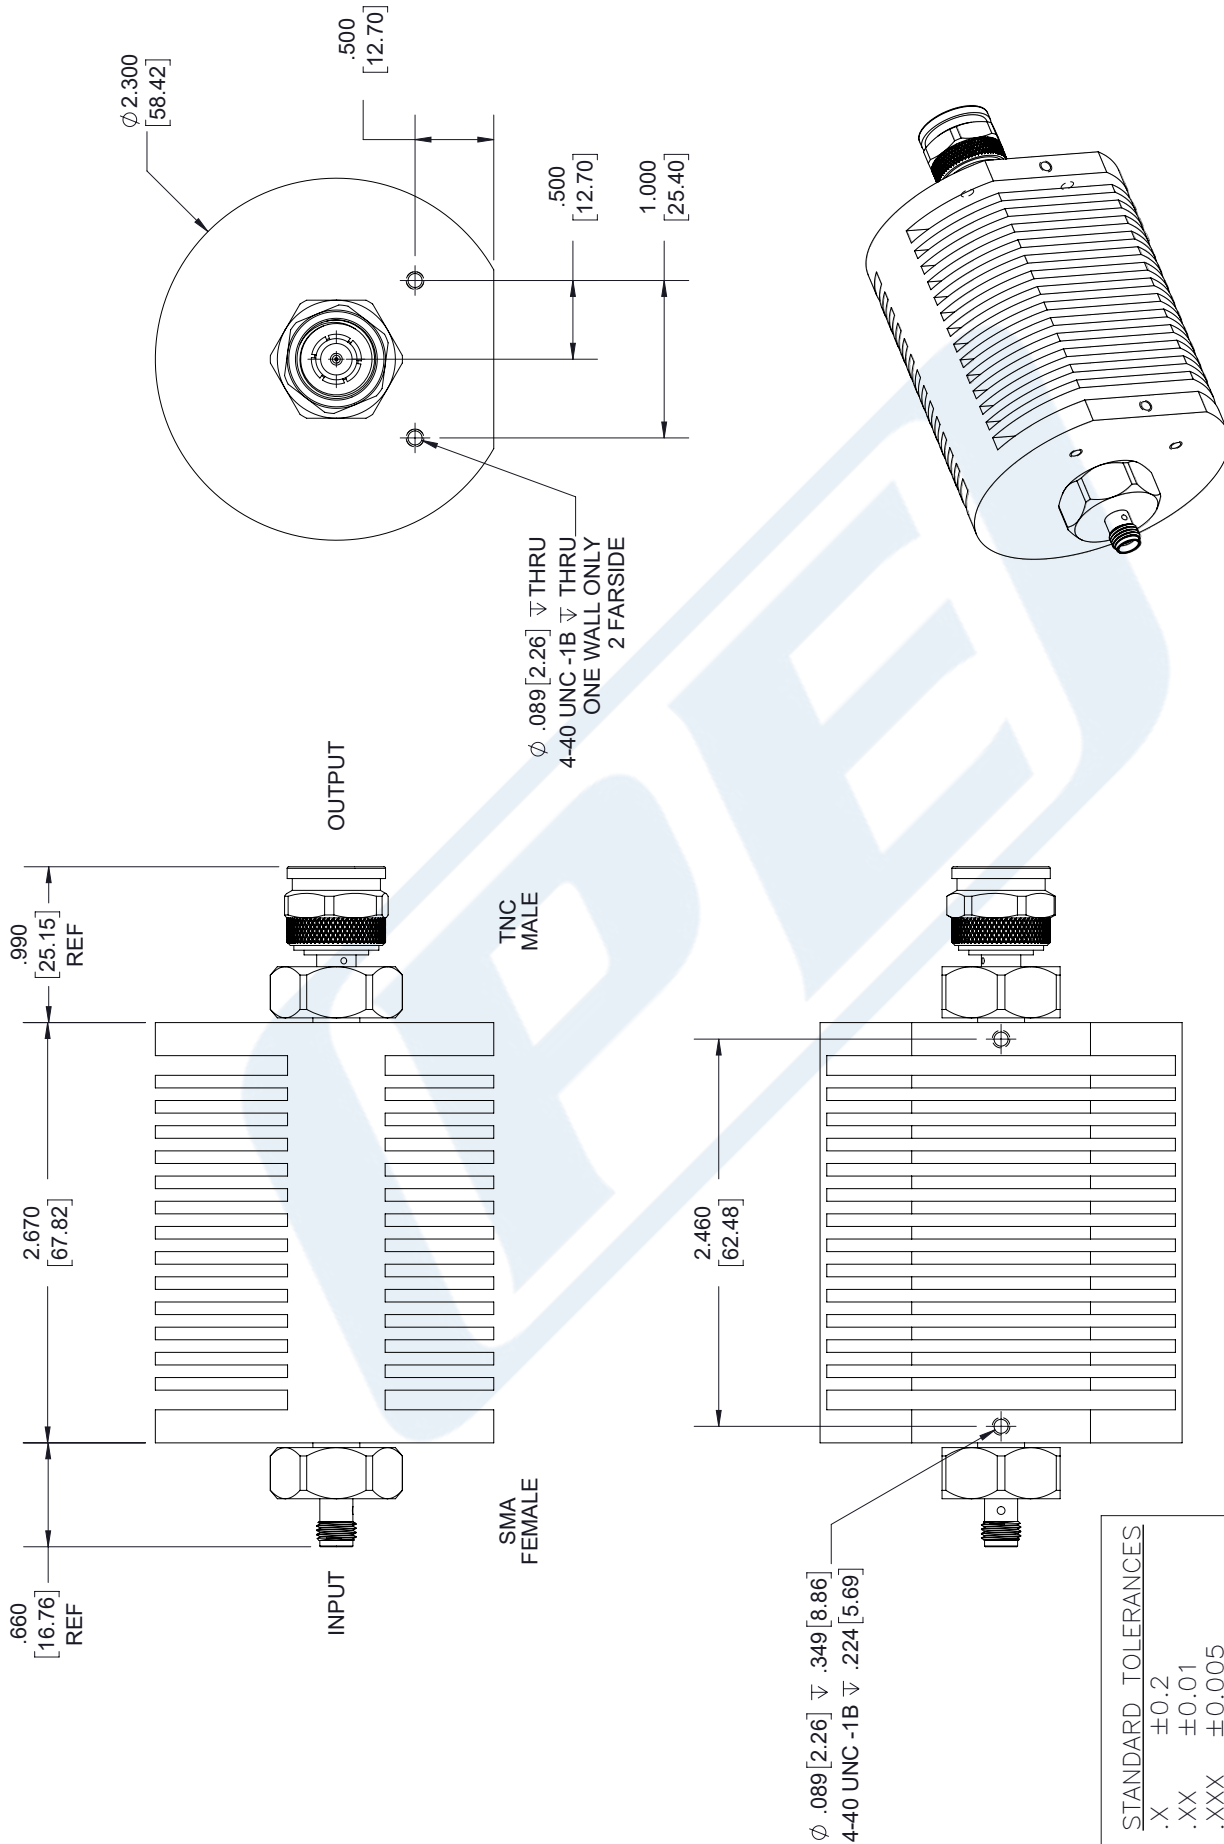

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
PE7365-3

CAGE CODE 53919

Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

**PE PASTERNAK®**  
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

7361

SIZE A

SCALE N/A

CAD FILE 04/18/18