



# Limiters Technical Data Sheet

PE80L2005

#### **Features**

- 5 Watt Input Power(CW)
- 500 MHz to 18 GHz Frequency Range
- · 2 dB Insertion Loss max.
- VSWR 1.8:1
- Leakage @ 1 Watt CW +18 dBm Max

- +50 dBm Peak Input Power
- Limiting Threshold +14 dBm
- Field Replaceable SMA Connectors
- Fast Response and Short Recovery Time 15 µs typical
- Compact and Rugged Thin Film Construction

## **Applications**

- Electronic Warfare
- Test & Measurement
- · Military & Space
- Military Communication Systems
- Stabilizing generator outputs
- Reducing amplitude variations
- Protects low noise amplifiers and other devices from ESD or input power damage
- Receiver Protection

## Weapon systems

## **Description**

The PE80L2005 is an Signal Limiter that operates in the 500 MHz to 18 GHz frequency range. The Limiter has up to 5 Watts CW input power handling capability with a +18 dBm max leakage output power level and +50 dBm peak input power. Typical performance incudes 2 dB max insertion loss, 1.8:1 typical input VSWR, and a fast response and short recovery time of 15 µsec. The excellent technical performance is achieved through the use of thin film stripline circuit construction. The low profile pin package supports field replaceable SMA connectors and can be drop mounted onto a PWB. The Limiter is designed for high reliability and meets MIL-STD-202F environmental test conditions for Humidity, Shock, Vibration, and Altitude.

## **Electrical Specifications**

Description	Minimum	Typical	Maximum	Units
Frequency Range	0.5		18	GHz
Insertion Loss			2	dB
Input VSWR		1.8:1		
Leakage (CW)			+18	dBm
@ 1 Watt CW				
Recovery Time		15		us
Input Power (CW)			5	Watt
Input Power (Peak) @10µs Pulse Width 5% Duty Cycle			100	Watt
Limiting Threshold	+14			dBm

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: High Power Limiter, Field Replaceable SMA, 100W Peak Power, 15 us Recovery, 18 dBm Flat Leakage, 500 MHz to 18 GHz PE80L2005

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com





# Limiters Technical Data Sheet

PE80L2005

#### **Mechanical Specifications**

Size

 Length
 0.788 in [20.02 mm]

 Width
 0.63 in [16 mm]

 Height
 0.394 in [10.01 mm]

 Weight
 0.035 lbs [15.88 g]

Configuration

StyleLimiterPackage StyleConnectorizedConnector 1SMA FemaleConnector 2SMA FemaleConnector OptionField Replaceable

#### **Environmental Specifications**

**Temperature** 

Operating Range 0 to +50 deg C
Storage Range -45 to +100 deg C

Humidity
MIL-STD-202F, Method 103B, Condition B
Shock
MIL-STD-202F, Method 213B, Condition B
Vibration
MIL-STD-202F, Method 204D, Condition B
Altitude
MIL-STD-202F, Method 105C, Condition B

## Compliance Certifications (see product page for current document)

DFARS Compliant 01/12/2017

#### Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: High Power Limiter, Field Replaceable SMA, 100W Peak Power, 15 us Recovery, 18 dBm Flat Leakage, 500 MHz to 18 GHz PE80L2005

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451







# Limiters Technical Data Sheet

# PE80L2005

#### **Typical Performance Data**

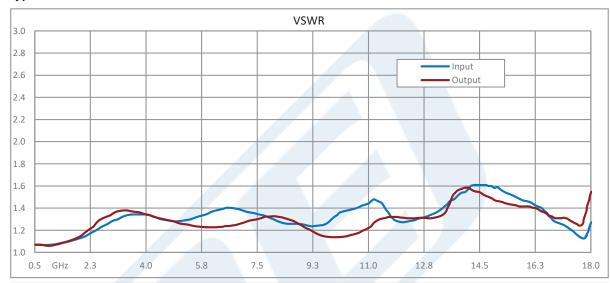

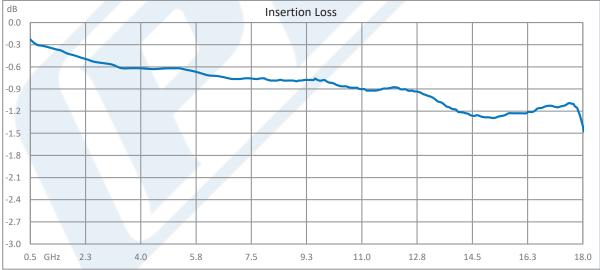

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: High Power Limiter, Field Replaceable SMA, 100W Peak Power, 15 us Recovery, 18 dBm Flat Leakage, 500 MHz to 18 GHz PE80L2005


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451





# Limiters Technical Data Sheet

# PE80L2005

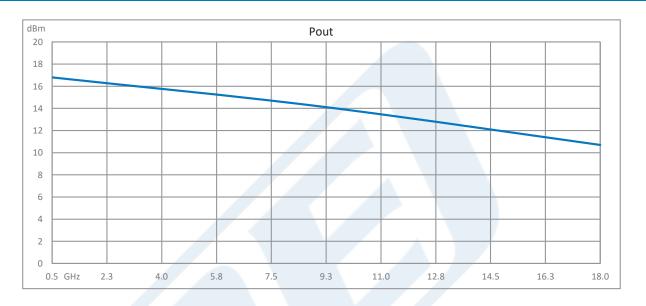

High Power Limiter, Field Replaceable SMA, 100W Peak Power, 15 us Recovery, 18 dBm Flat Leakage, 500 MHz to 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: High Power Limiter, Field Replaceable SMA, 100W Peak Power, 15 us Recovery, 18 dBm Flat Leakage, 500 MHz to 18 GHz PE80L2005

URL: https://www.pasternack.com/sma-limiter-15-us-18-dbm-18-ghz-pe80l2005-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451

Sales@Pasternack.com • Techsupport@Pasternack.com

# PE80L2005 CAD Drawing

High Power Limiter, Field Replaceable SMA, 100W Peak Power, 15 us Recovery, 18 dBm Flat Leakage, 500 MHz to 18 GHz

