



Frequency Divider, Divide by 2 Prescaler Module,
500 MHz to 18 GHz, Field Replaceable SMA

Frequency Dividers Technical Data Sheet

PE88D2000

Features

- Divide by 2 Prescaler
- Wide Frequency Band
- GaAs HBT MMIC Technology
- Low Phase Noise -150 dBc/Hz @ 100 kHz offset
- Output Power -4 dBm
- Low Reverse Leakage Level 55 dB typical
- Single +5V Bias Voltage
- Integrated DC Blocking Capacitors
- Hermetically Sealed Module
- Mil Spec Compliant
- Field Replaceable SMA Connectors
- -55°C to +85°C Operating Temperature

Applications

- Electronic Warfare
- Electronic Countermeasures
- Point-To-Point Radio
- Point-To-Multipoint Radio
- VSAT Radios
- Fiber Optic
- Space Systems
- Test Instrumentation
- Telecom Infrastructure

Description

The PE88D2000 is a low noise Divide-by-2 Static Prescaler Module that covers a wide input frequency bandwidth from 0.5 GHz to 18 GHz. The design utilizes advanced GaAs HBT MMIC semiconductor technology that produces low additive SSB phase noise performance with a typical level of -150 dBc/Hz at 100 kHz offset. Additional typical performance includes an output power level of -4 dBm and reverse leakage up to 55 dB. Input/output ports are matched for 50 ohms and are DC blocked. The design requires a single +5V DC supply. The compact drop-in package is RoHS compliant and hermetically sealed with field replaceable SMA connectors. And for added confidence, this rugged package assembly is designed to meet MIL-STD-883 test conditions for Hermeticity and Temperature Cycle.

Electrical Specifications (TA= 25°C, Vd1 = 5 V, Id1 = 75 mA)

Description	Minimum	Typical	Maximum	Units
Input Frequency (Sine Wave)	0.5		18	GHz
Impedance		50		Ohms
Input Power (CW)	-20			dBm
Output Power	-7	-4		dBm
Reverse Leakage		55		dB
Operating DC Voltage 1		5		V
Operating DC Current 1		75		mA

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Frequency Divider, Divide by 2 Prescaler Module, 500 MHz to 18 GHz, Field Replaceable SMA PE88D2000](#)



Frequency Divider, Divide by 2 Prescaler Module,
500 MHz to 18 GHz, Field Replaceable SMA

Frequency Dividers Technical Data Sheet

PE88D2000

Performance by Frequency

Description	Conditions	Min.	Typ.	Max.	Units
Maximum Input Frequency		18	19		GHz
Minimum Input Frequency	Sine Wave Input			0.5	GHz
Input Power Range	Fin = 2 To 4 GHz	-15	-10	+10	dBm
	Fin = 4 To 14 GHz	-20	-15	+10	dBm
	Fin = 14 To 16 GHz	-20	-15	+5	dBm
	Fin = 16 To 18 GHz	-15	-10	0	dBm
Output Power	Fin = 0.5 To 18 GHz	-7	-4		dBm
Reverse Leakage	Fin = 0.5 To 18 GHz		55		dB
SSB Phase Noise (100 KHz Offset)	Pin = 0 dBm, Fin = 4.8 GHz		-150		dBc/Hz
Output Transition Time	Pin = 0 dBm, Fout = 882 MHz		100		ps
Supply Current (Icc)			75		mA

Mechanical Specifications

Size	
Length	0.64 in [16.26 mm]
Width	0.59 in [14.99 mm]
Height	0.29 in [7.37 mm]
Weight	0.06 lbs [27.22 g]
Body Material and Plating	Nickel, Gold
Input Connector	Field Replaceable SMA Female
Output Connector	Field Replaceable SMA Female
Power Supply Connector	Solder Pin

Environmental Specifications

Temperature	
Operating Range	-55 to +85 deg C
Storage Range	-65 to +150 deg C
Temperature Cycling	MIL-STD-883, Method 101C, Cond B
Hermetic Seal	Gross Leak MIL-STD-883 Method 1014C1/Fine Leak MIL-STD-883, Method 1014A2, 5 x 10 ⁻⁸ atm cc
ESD Sensitivity	ESD Class 1A Material, Transport in Approved ESD bags. Handle only in approved ESD Workstation.



Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Frequency Divider, Divide by 2 Prescaler Module, 500 MHz to 18 GHz, Field Replaceable SMA PE88D2000](#)



Frequency Divider, Divide by 2 Prescaler Module,
500 MHz to 18 GHz, Field Replaceable SMA


Frequency Dividers Technical Data Sheet

PE88D2000

Compliance Certifications (visit www.Pasternack.com for current document)
RoHS Compliant

Plotted and Other Data
Notes:

Functional Block Diagram

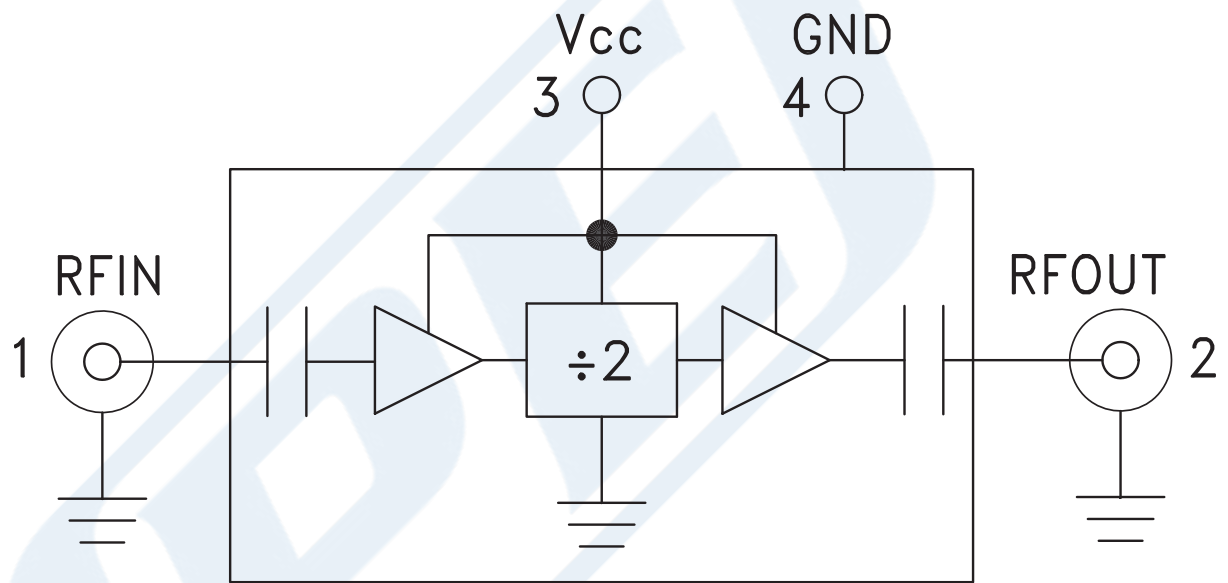

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Frequency Divider, Divide by 2 Prescaler Module, 500 MHz to 18 GHz, Field Replaceable SMA PE88D2000](#)




Frequency Divider, Divide by 2 Prescaler Module,
500 MHz to 18 GHz, Field Replaceable SMA

Frequency Dividers Technical Data Sheet


PE88D2000

Typical Performance Data


Input Sensitivity Window, $T = 25\text{ }^{\circ}\text{C}$

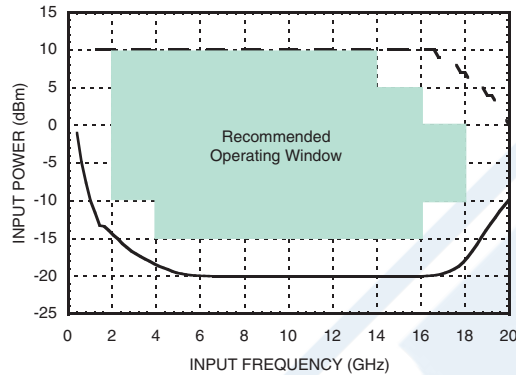


Input Sensitivity vs. Temperature

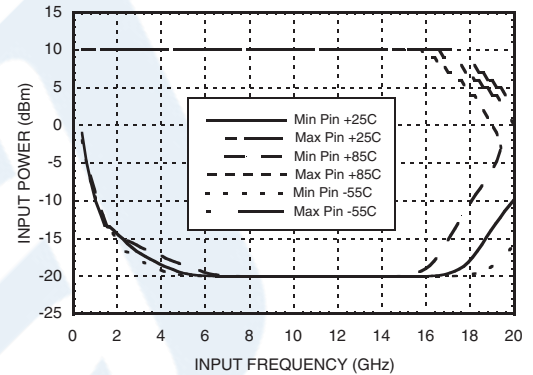

Output Power vs. Temperature

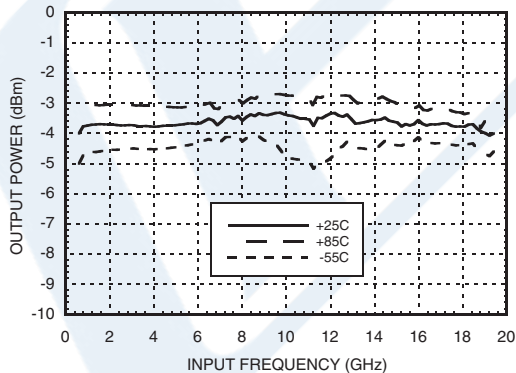

SSB Phase Noise Performance, $P_{in} = 0\text{ dBm}$, $T = 25\text{ }^{\circ}\text{C}$

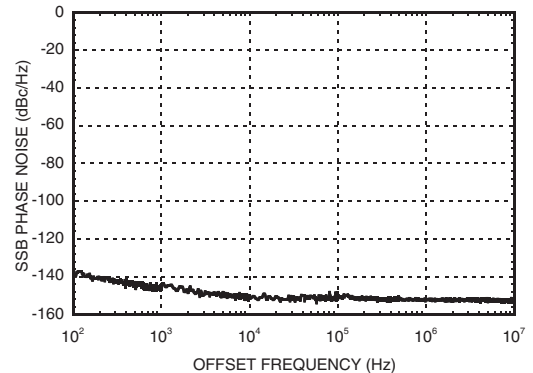

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Frequency Divider, Divide by 2 Prescaler Module, 500 MHz to 18 GHz, Field Replaceable SMA PE88D2000](#)




Frequency Divider, Divide by 2 Prescaler Module,
500 MHz to 18 GHz, Field Replaceable SMA


Frequency Dividers Technical Data Sheet

PE88D2000


Output Harmonic Content,
 $P_{in} = 0 \text{ dBm}$, $T = 25^\circ\text{C}$

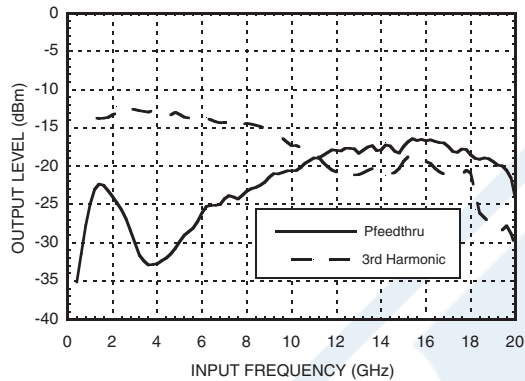

Reverse Leakage, $P_{in} = 0 \text{ dBm}$, $T = 25^\circ\text{C}$

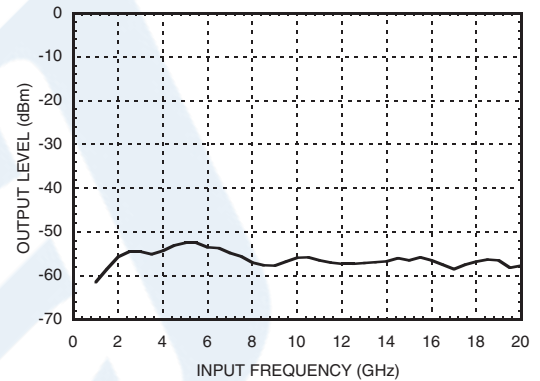

Output Voltage Waveform,
 $P_{in} = 0 \text{ dBm}$, $F_{out} = 882 \text{ MHz}$, $T = 25^\circ\text{C}$

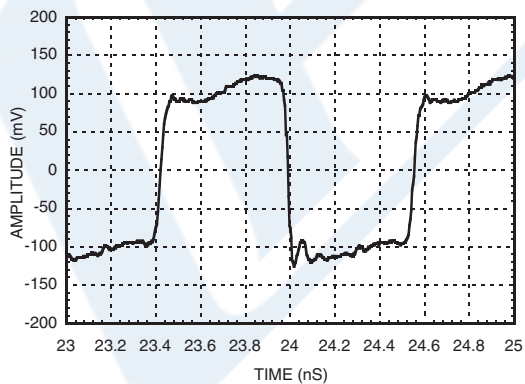

Frequency Divider, Divide by 2 Prescaler Module, 500 MHz to 18 GHz, Field Replaceable SMA from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Frequency Divider, Divide by 2 Prescaler Module, 500 MHz to 18 GHz, Field Replaceable SMA](#)

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Frequency Divider, Divide by 2 Prescaler Module, 500 MHz to 18 GHz, Field Replaceable SMA PE88D2000](#)



Frequency Divider, Divide by 2 Prescaler Module,
500 MHz to 18 GHz, Field Replaceable SMA

Frequency Dividers Technical Data Sheet

PE88D2000


PE88D2000

URL: <http://www.pasternack.com/frequency-divider-divide-2-prescaler-module-500-mhz-18-ghz-sma-pe88d2000-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE88D2000 CAD Drawing

Frequency Divider, Divide by 2 Prescaler Module,
500 MHz to 18 GHz, Field Replaceable SMA

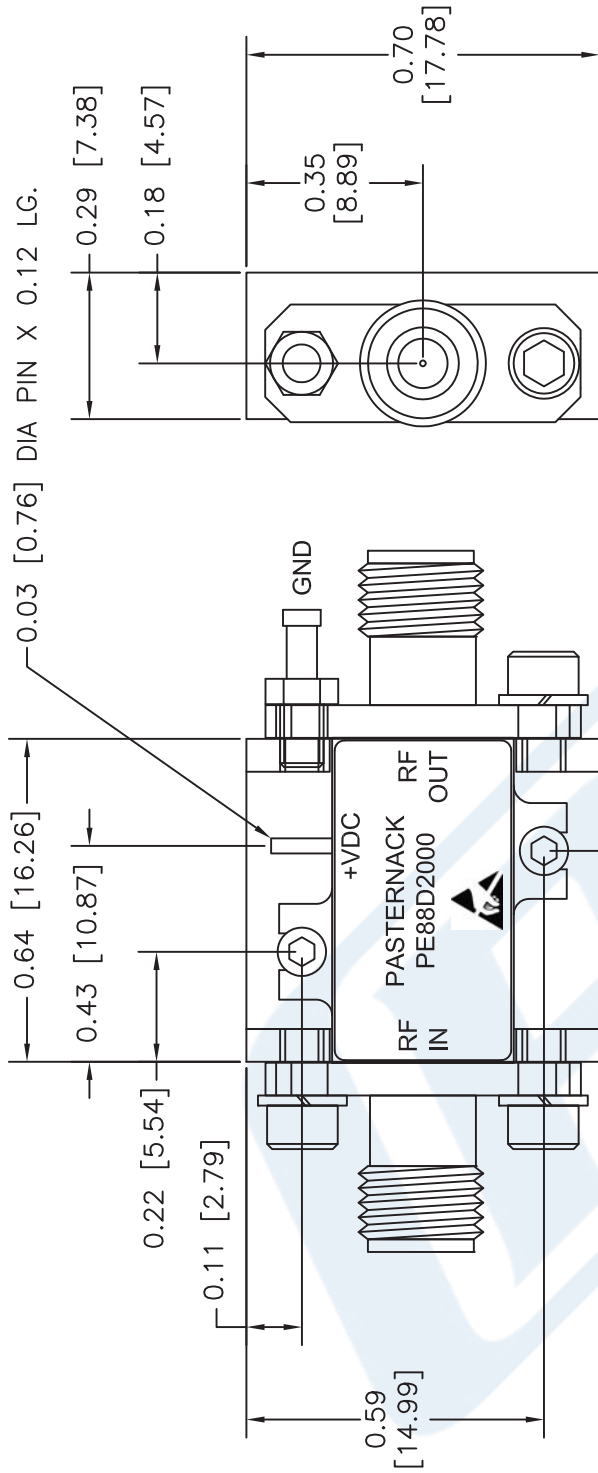

#0-80 HARDWARE THRU
0.074 [1.88] DIA THRU
(REMOVE HARDWARE TO
MOUNT ASSEMBLY)

NOTE:
HEAT SINK REQUIRED FOR PROPER OPERATION,
UNIT IS COOLED BY CONDUCTING TO HEAT SINK.

PE PASTERNAK
THE ENGINEER'S RF SOURCE

Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | Fax: (949) 261-7451
Website: www.pasternack.com | E-Mail: sales@pasternack.com

DWG TITLE

PE88D2000

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

FSCM NO. 53919

CAD FILE 050616

SCALE N/A

SIZE A

2233