



5 Watts Low Power Commercial Grade WR-112 Waveguide  
Load 7.05 GHz to 10 GHz, Bronze

## Waveguide Terminations Technical Data Sheet

**PEWTR1008**

### Features

- WR-112
- 7.05 GHz to 10 GHz
- UG-51/U Square Cover Brass Flange
- 1.02:1 Typical VSWR
- 5 Watts Average Power Handling

### Applications

- Radar Systems
- Military and Space
- Wireless Radio Systems
- Telecom Infrastructure
- Communication Systems
- R&D Labs
- Microwave Radio Systems

### Description

The PEWTR1008 is a WR-112 waveguide termination / load that operates in the frequency range of 7.05 GHz to 10 GHz. This WR-112 waveguide termination has a typical VSWR of 1.02:1. These waveguide termination designs are made of Silver Plated Bronze and incorporate a standard UG-51/U Square Cover Brass Flange.

Pasternack waveguide terminations / loads are designed so virtually all applied power is absorbed, thus assuring a low VSWR. The power rating on this WR-112 termination is 5 watts, other detailed specifications and a diagram drawing can be found on this datasheet PDF below. Pasternack offers a complete family of waveguide terminations that are in-stock for same day shipment.

### Electrical Specifications


Description	Minimum	Typical	Maximum	Units
Frequency Range	7.05		10	GHz
VSWR		1.02:1		
Input Power (CW)			5	Watts

### Mechanical Specifications

Weight 0.665 lbs [301.64 g]

Description	Flange	Waveguide
Designation	UG-51/U	WR-112
Type	Square Cover	
Material	Brass	Bronze

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Watts Low Power Commercial Grade WR-112 Waveguide Load 7.05 GHz to 10 GHz, Bronze PEWTR1008](#)



## 5 Watts Low Power Commercial Grade WR-112 Waveguide Load 7.05 GHz to 10 GHz, Bronze

### Waveguide Terminations Technical Data Sheet


**PEWTR1008**

**Compliance Certifications** (see [product page](#) for current document)

#### Plotted and Other Data

Notes:

#### Typical Performance Data

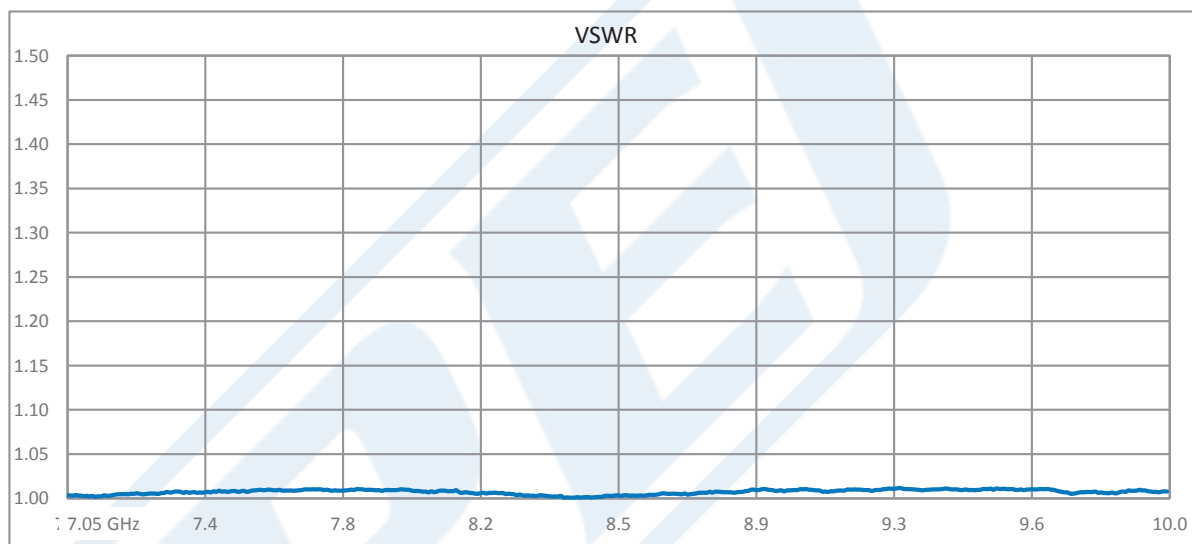

5 Watts Low Power Commercial Grade WR-112 Waveguide Load 7.05 GHz to 10 GHz, Bronze from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [5 Watts Low Power Commercial Grade WR-112 Waveguide Load 7.05 GHz to 10 GHz, Bronze PEWTR1008](#)


URL: <https://www.pasternack.com/5-watts-wr-112-rf-load-7.05-10-ghz-commercial-grade-pewtr1008-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PEWTR1008 CAD Drawing

5 Watts Low Power Commercial Grade WR-112 Waveguide

Load 7.05 GHz to 10 GHz, Bronze

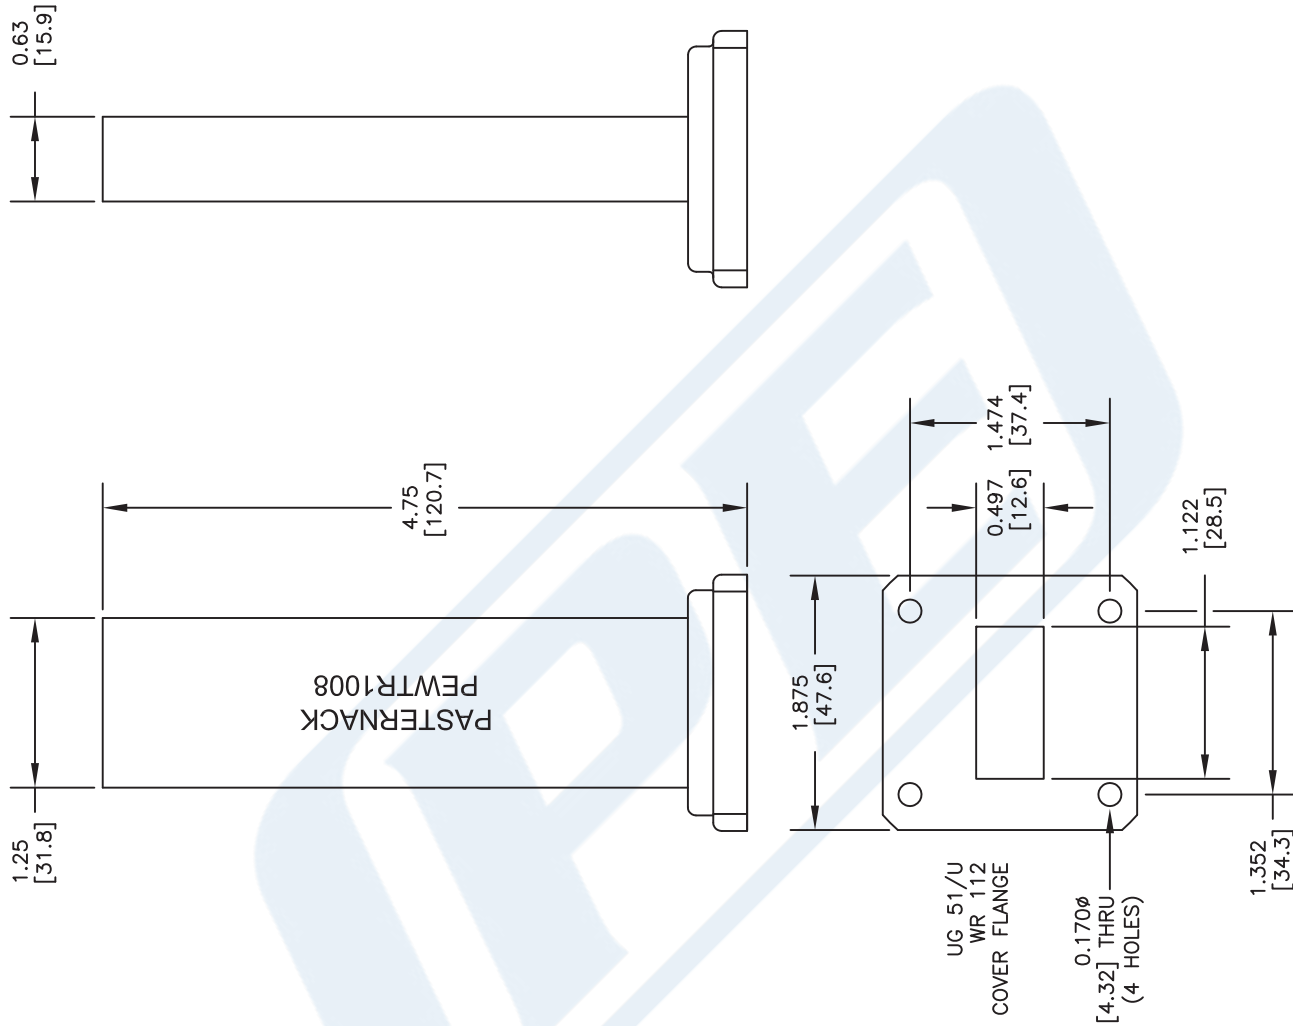

## STANDARD TOLERANCES

.X ±0.2  
.XX ±0.1  
.XXX ±0.05

\*STANDARD TOLERANCES APPLY ONLY TO DIMENSIONS IN INCHES



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

DWG TITLE

**PEWTR1008**

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

CAGE CODE 53919

CAD FILE XXXXXX

SCALE N/A

SIZE A

2233