



WR-102 to SMA Male Waveguide to Coax Adapter 7 GHz to 11 GHz

TECHNICAL DATA SHEET

PE9811

WR-102 to SMA Male Waveguide to Coax Adapter 7 GHz to 11 GHz

Configuration

Waveguide Interface	WR-102
RF Connector	SMA Male
RF Connector Impedance	50 Ohms

Electrical Specifications

Frequency Range, GHz	7 to 11
----------------------	---------

Mechanical Specifications

Size

Length, in [mm]	1.5 [38.1]
Width/Dia., in [mm]	1.68 [42.67]
Height, in [mm]	1.65 [41.91]

Waveguide Interface

Type	WR-102
Body Material and Plating	Aluminum

RF Connector

Type	SMA Male
Hex Size, Inch	5/16
Torque, in-lbs [Nm]	8 [0.9]
Body Material and Plating	Passivated Stainless Steel

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data

Notes:	Values at 25 °C, sea level
--------	----------------------------

WR-102 to SMA Male Waveguide to Coax Adapter 7 GHz to 11 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-102 to SMA Male Waveguide to Coax Adapter 7 GHz to 11 GHz PE9811](http://www.pasternack.com/waveguide-to-sma-type-male-frequency-range-700-1100-ghz-pe9811-p.aspx)

URL: <http://www.pasternack.com/waveguide-to-sma-type-male-frequency-range-700-1100-ghz-pe9811-p.aspx>


The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE9811 CAD Drawing

WR-102 to SMA Male Waveguide to Coax Adapter 7 GHz to 11 GHz

WR102	Dimension	Inches	mm
A		1.280	32.51
H		1.688	42.88
J		1.340	34.04
K (± 0.003)		1.020	25.91
L (± 0.003)		0.510	12.95

M		0.250	6.35
N		1.500	38.10
O		1.150	29.21
P		0.645	16.38

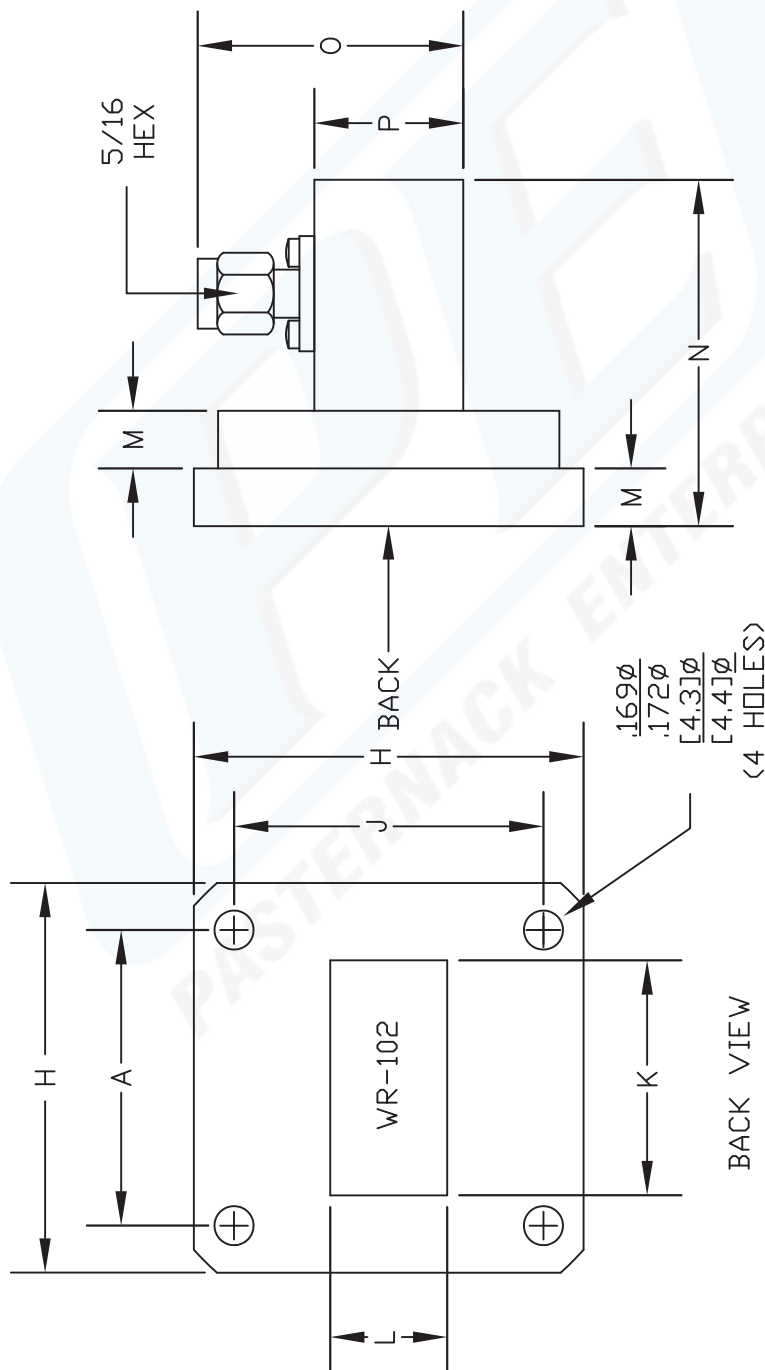

DWG TITLE

PE9811

NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

PASTERNAK ENTERPRISES, INC.

P.O. BOX 16759, IRVINE, CA 92623

PHONE (949) 261-1920 FAX (949) 261-7451

WEB ADDRESS: www.pasternack.com

E-MAIL ADDRESS: sales@pasternack.com

COAXIAL & FIBER OPTICS



PASTERNAK ENTERPRISES
ESTABLISHED 1972

REV. -

FSCM NO. 53919

CAD FILE

121702

SCALE N/A

SIZE A

127