

40 dB Fixed Attenuator, 7/16 DIN Female To TNC Male  
Directional Rated To 50 Watts Up To 7.5 GHz



TECHNICAL DATA SHEET

PE7340-40

**40 dB Fixed Attenuator, 7/16 DIN Female To TNC Male Directional Rated To 50 Watts Up To 7.5 GHz**

**Configuration**

|                           |                                   |
|---------------------------|-----------------------------------|
| Design                    | Fixed, Directional Attenuator     |
| Connector 1               | 7/16 DIN Female                   |
| Connector 2               | TNC Male                          |
| Body Material and Plating | Aluminum Heatsink, Black Anodized |

**Electrical Specifications**

|                            |           |
|----------------------------|-----------|
| Frequency Range, GHz       | DC to 7.5 |
| Impedance, Ohms            | 50        |
| Attenuation Value, dB      | 40        |
| Maximum Input Power, Watts | 50        |
| Maximum VSWR               | 1.45:1    |

**Frequency 1**

|                          |         |
|--------------------------|---------|
| Range, GHz               | DC to 6 |
| VSWR                     | 1.3:1   |
| Attenuation Accuracy, dB | 1       |

**Frequency 2**

|                          |          |
|--------------------------|----------|
| Range, GHz               | 6 to 7.5 |
| VSWR                     | 1.45:1   |
| Attenuation Accuracy, dB | 1.25     |

**Mechanical Specifications**

**Temperature**

|                        |             |
|------------------------|-------------|
| Operating Range, deg C | -55 to +125 |
|------------------------|-------------|

**Size**

|                 |                |
|-----------------|----------------|
| Length, in [mm] | 4.01 [101.85]  |
| Width, in [mm]  | 3 [76.2]       |
| Height, in [mm] | 3 [76.2]       |
| Weight, lbs [g] | 1.796 [814.65] |

**Connector 1**

|                              |                 |
|------------------------------|-----------------|
| Type                         | 7/16 DIN Female |
| Contact Material and Plating | Brass, Silver   |
| Hex Size, In.                | 11/16           |
| Body Material and Plating    | Brass, Silver   |

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [40 dB Fixed Attenuator, 7/16 DIN Female To TNC Male Directional Rated To 50 Watts Up To 7.5 GHz PE7340-40](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

40 dB Fixed Attenuator, 7/16 DIN Female To TNC Male  
Directional Rated To 50 Watts Up To 7.5 GHz



TECHNICAL DATA SHEET

PE7340-40

**Connector 2**

Type

TNC Male

Contact Material and Plating

Beryllium Copper, Gold

Outer Conductor Material and Plating

Stainless Steel, Passivated

Hex Size, In.

11/16

Body Material and Plating

Stainless Steel, Passivated

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant

Yes

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

OUTPUT PORT HANDLES 5 WATTS MAX POWER

URL: <http://www.pasternack.com/40db-fixed-7-16-female-tnc-male-50-watts-attenuator-pe7340-40-p.aspx>

40 dB Fixed Attenuator, 7/16 DIN Female To TNC Male Directional Rated To 50 Watts Up To 7.5 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.


# PE7340-40 CAD Drawing

40 dB Fixed Attenuator, 7/16 DIN Female To TNC Male

Directional Rated To 50 Watts Up To 7.5 GHz

| Table of Information |                |  |
|----------------------|----------------|--|
| Connector Type       | DIM "A" (REF.) |  |
| SMA Male             | 0.68           |  |
| SMA Female           | 0.54           |  |
| TNC Male             | 0.98           |  |
| TNC Female           | 0.94           |  |
| N Female             | 0.95           |  |
| N Male               | 0.98           |  |
| 7/16 Male            | 1.12           |  |
| 7/16 Female          | 1.16           |  |

| Part Number Configuration |                             |                  |
|---------------------------|-----------------------------|------------------|
| xx                        | Input Connector             | Output Connector |
| 10                        | 7/16 Female                 | 7/16 Male        |
| 11                        | N Female                    | 7/16 Male        |
| 12                        | 7/16 Male                   | 7/16 Female      |
| 13                        | 7/16 Female                 | 7/16 Female      |
| 14                        | N Male                      | 7/16 Female      |
| 15                        | N Female                    | 7/16 Female      |
| 16                        | 7/16 Female                 | N Male           |
| 17                        | N Female                    | N Male           |
| 18                        | SMA Female                  | N Male           |
| 19                        | TNC Female                  | N Male           |
| 20                        | 7/16 Male                   | N Female         |
| 21                        | 7/16 Female                 | N Female         |
| 22                        | N Male                      | N Female         |
| 23                        | N Female                    | N Female         |
| 24                        | SMA Male                    | N Female         |
| 25                        | SMA Female                  | N Female         |
| 26                        | TNC Male                    | N Female         |
| 27                        | TNC Female                  | N Female         |
| 28                        | 7/16 Female                 | SMA Male         |
| 29                        | N Female                    | SMA Male         |
| 30                        | SMA Female                  | SMA Male         |
| 31                        | TNC Female                  | SMA Male         |
| 32                        | 7/16 Male                   | SMA Female       |
| 33                        | 7/16 Female                 | SMA Female       |
| 34                        | N Male                      | SMA Female       |
| 35                        | N Female                    | SMA Female       |
| 36                        | SMA Male                    | SMA Female       |
| 37                        | SMA Female                  | SMA Female       |
| 38                        | TNC Male                    | SMA Female       |
| 39                        | TNC Female                  | SMA Female       |
| 40                        | 7/16 Female                 | TNC Male         |
| 41                        | N Female                    | TNC Male         |
| 42                        | SMA Female                  | TNC Male         |
| 43                        | TNC Female                  | TNC Male         |
| 44                        | 7/16 Male                   | TNC Female       |
| 45                        | 7/16 Female                 | TNC Female       |
| 46                        | N Male                      | TNC Female       |
| 47                        | N Female                    | TNC Female       |
| 48                        | SMA Male                    | TNC Female       |
| 49                        | SMA Female                  | TNC Female       |
| 50                        | TNC Male                    | TNC Female       |
| 51                        | TNC Female                  | TNC Female       |
| -yy                       | Indicates Attenuation Level |                  |

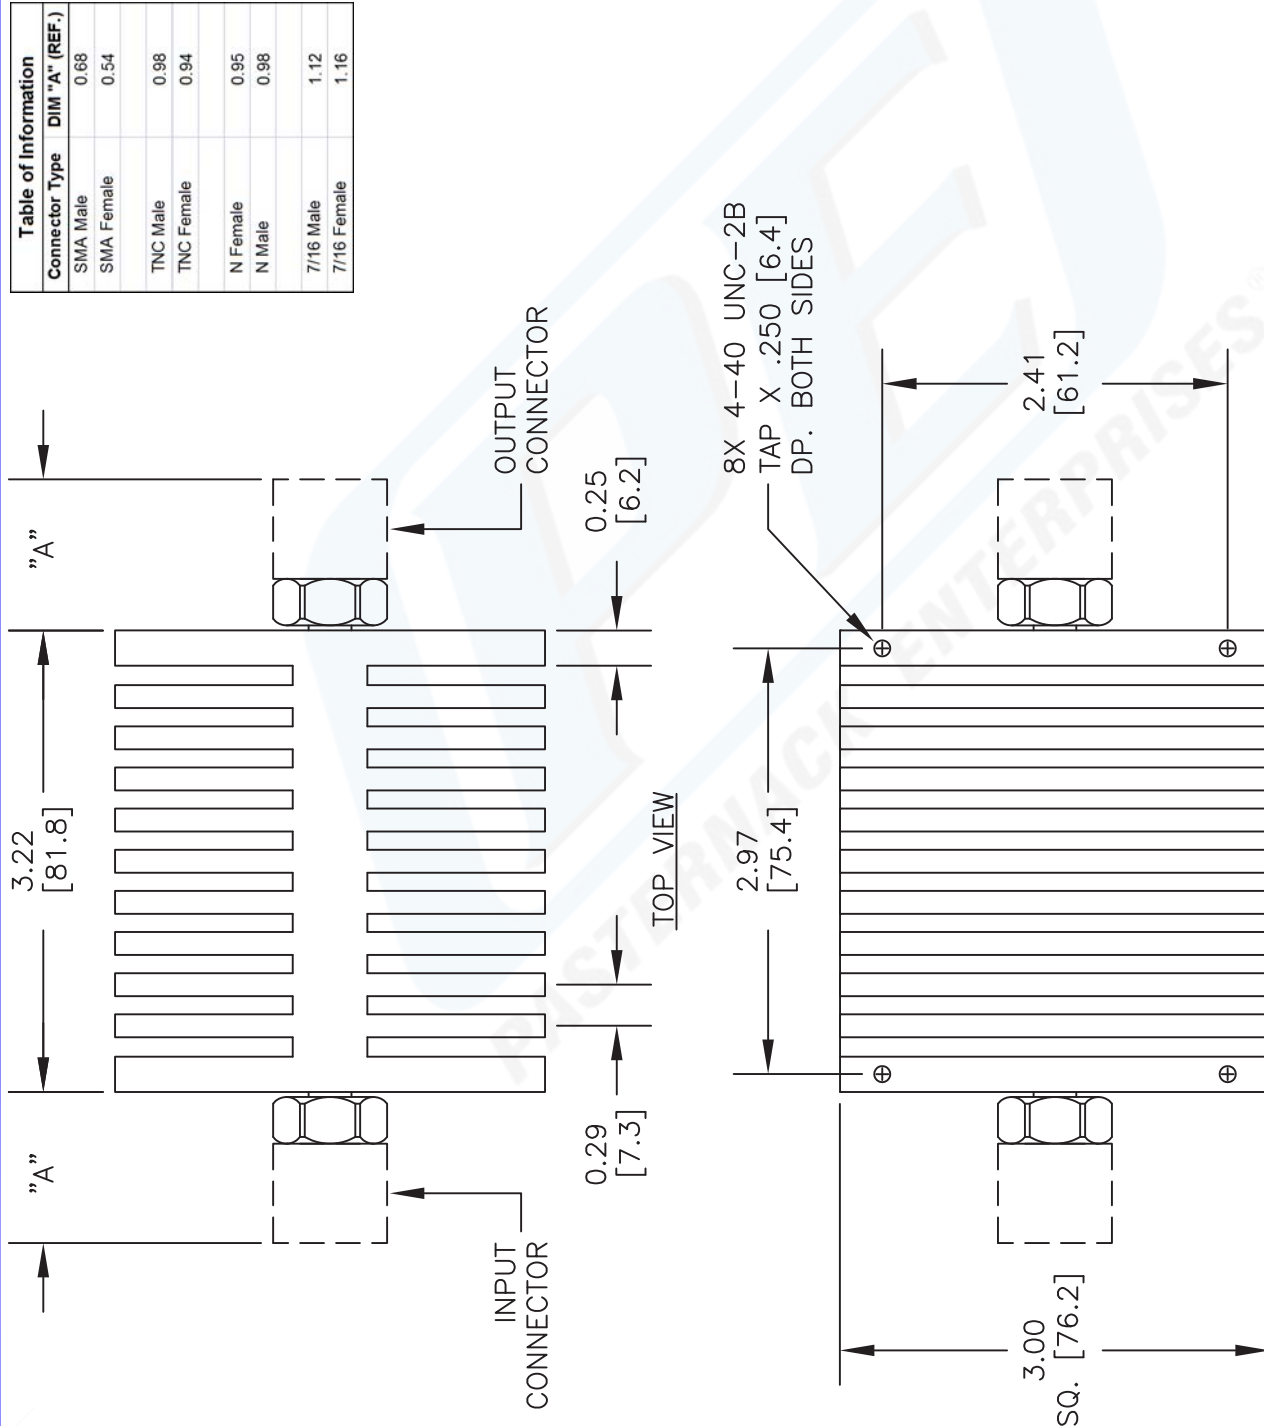

DWG TITLE

PE73xx-yy

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

**PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: www.pasternack.com | E-Mail: sales@pasternack.com

FSCM NO. 53919

CAD FILE 102512

SCALE N/A

SIZE A

2233