

N Male Right Angle to N Male Right Angle Cable
24 Inch Length Using RG316 Coax, RoHS



RF Cable Assemblies Technical Data Sheet

PE34236LF-24

Configuration

- Connector 1: N Male Right Angle
- Connector 2: N Male Right Angle
- Cable Type: RG316

Features

- Max Frequency 3 GHz
- FEP Jacket


Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE34236LF-24 type N male right angle to type N male right angle 24 inch cable using RG316 coax is part of our full line of RF components available for same-day shipping. Pasternack's flexible RF cable assemblies are ideal for applications where tight bends and flexure are required. This Pasternack type N to type N cable assembly has a male to male gender configuration with 50 ohm flexible RG316 coax. The PE34236LF-24 type N male to type N male cable assembly operates to 3 GHz. The right angle type N interfaces on the RG316 cable allow for easier connections in tight spaces.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

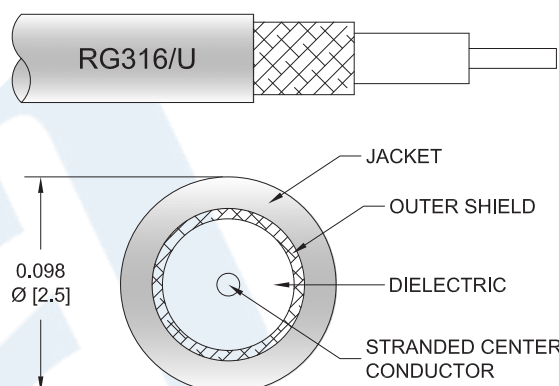

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Right Angle Cable 24 Inch Length Using RG316 Coax, RoHS PE34236LF-24](#)



N Male Right Angle to N Male Right Angle Cable
24 Inch Length Using RG316 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE34236LF-24

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
Capacitance		32 [104.99]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Typ.)	0.42	0.52	0.677	0.96	1.36	dB

Mechanical Specifications

Cable Assembly

Weight 0.269 lbs [122.02 g]

Cable

Cable Type RG316
Impedance 50 Ohms
Inner Conductor Type Stranded
Inner Conductor Material and Plating Copper Clad Steel, Silver
Dielectric Type PTFE
Number of Shields 1
Shield Layer 1 Silver Plated Copper Braid
Jacket Material FEP, Tan
Jacket Diameter 0.098 in [2.49 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Right Angle Cable 24 Inch Length Using RG316 Coax, RoHS PE34236LF-24](#)



N Male Right Angle to N Male Right Angle Cable
24 Inch Length Using RG316 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE34236LF-24

Connectors

Description	Connector 1	Connector 2
Type	N Male Right Angle	N Male Right Angle
Specification	MIL-STD-348A	MIL-STD-348A
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	30µ in. minimum	30µ in. minimum
Dielectric Type	Teflon	Teflon
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100µ in. minimum	100µ in. minimum

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Right Angle Cable 24 Inch Length Using RG316 Coax, RoHS PE34236LF-24](#)



N Male Right Angle to N Male Right Angle Cable
24 Inch Length Using RG316 Coax, RoHS

RF Cable Assemblies Technical Data Sheet

PE34236LF-24

How to Order

Part Number Configuration:

PE34236LF

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE34236LF-12 = 12 inches long cable
PE34236LF-100cm = 100 cm long cable

N Male Right Angle to N Male Right Angle Cable 24 Inch Length Using RG316 Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [N Male Right Angle to N Male Right Angle Cable 24 Inch Length Using RG316 Coax, RoHS PE34236LF-24](#)


URL: <https://www.pasternack.com/n-male-n-male-rg316u-cable-assembly-pe34236lf-24-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE34236LF-24 CAD Drawing

N Male Right Angle to N Male Right Angle Cable 24 Inch
Length Using RG316 Coax, RoHS

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
B	PCR PE34236 20220308	03/21/2022	AGANWANI

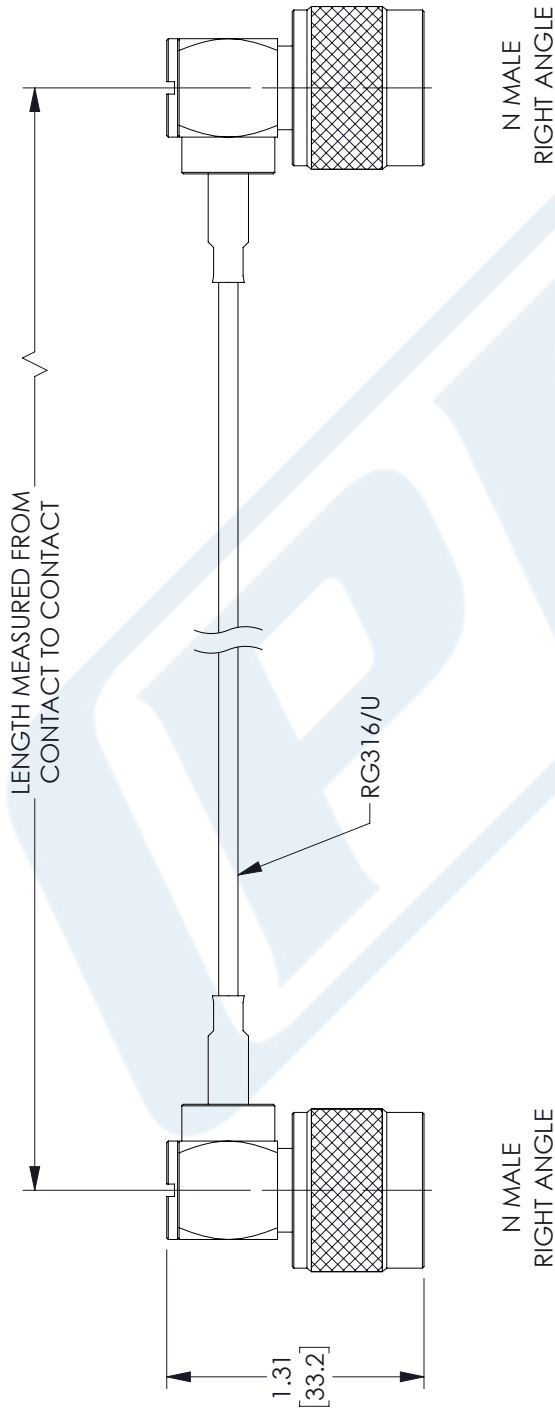

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS				PE PASTERNAK an INFINITE® brand Pasternack Enterprises, Inc. P.O Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com				THIRD-ANGLE PROJECTION	
TOLERANCES: X = ± .2 [.08] FRACTIONS .XX = ± .02 [.51] ± 1/32 .XXX = ± .005 [.13] ANGLES ± 1° CABLE LENGTH (L) TOLERANCES: L ≤ 12 [305] = +1 [25] / -0 12 [305] < L ≤ 60 [1524] = +2 [51] / -0 60 [1524] < L ≤ 120 [3048] = +4 [102] / -0 120 [3048] < L ≤ 300 [7620] = +6 [152] / -0 300 [7620] < L = +5% / -0				THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.		 			
				SHEET	1	OF	1		
				SCALE	N/A				
SIZE				CAGE CODE	DRAWN BY		ITEM NO.		
A				53919	DZINN		PE34236LF		
ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.						REV	B		

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.