



SMA Male to SMA Male Cable 120 Inch Length Using PE-P141 Coax with HeatShrink, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE350-120

Configuration

- Connector 1: SMA Male
- Connector 2: SMA Male
- Cable Type: PE-P141

Features

- Max Frequency 26.5 GHz
- Shielding Effectivity > 110 dB
- 70% Phase Velocity
- Double Shielded
- FEP Jacket
- Highly durable flexible cable design with a VoP of 70%
- Thick wall SMA male connectors perform to 26.5 GHz
- Type N connectors perform to 18 GHz
- Electrical performance is equivalent to that of a solid wall 141 semi-rigid assembly
- Shielding effectiveness in excess of 100 dB
- Operating temperature range of -55 to +125°C
- RoHS Compliant
- Custom lengths built same-day
- 100% Continuity, Hi-Pot, and RF Tested

Applications

- General Purpose
- Laboratory Use

Description

PE-P141 high performance coax assemblies are cost effective designs, ideal for production test environments where rugged flexible cable assemblies are required. This series includes 26.5 GHz stainless steel SMA male connectors with a thick wall outer conductor designed to extend the life of the cable assemblies. A heavy-duty boot provides improved strain relief and adds to the durability of the cable assemblies. 18 GHz stainless steel type N male connectors with hex/knurl coupling nuts are also available. These cable assemblies are built using double-shielded flexible cable providing excellent shielding greater than 100 dB. All PE-P141 test cables are 100% continuity, Hi-Pot, and RF tested to the published specifications. Custom lengths are built to order and shipped the same day.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 120 Inch Length Using PE-P141 Coax with HeatShrink, LF Solder, RoHS PE350-120](#)



SMA Male to SMA Male Cable 120 Inch Length Using PE-P141 Coax with HeatShrink, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE350-120

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		26.5	GHz
VSWR			1.45:1	
Velocity of Propagation		70		%
RF Shielding	110			dB
Capacitance		29.4 [96.46]		pF/ft [pF/m]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	3	5	10	18	26.5	GHz
Insertion Loss (Typ.)	2	2.6	4	5.8	7.5	dB
VSWR (Max.)	1.35:1	1.35:1	1.35:1	1.35:1	1.45:1	

Electrical Specification Notes:

Insertion loss does not include the loss of the connectors.

Insertion loss is estimated as $0.05 \times \text{sqrt}(f\text{GHz})$ dB per connector.

Short lengths up to 12" long may exhibit VSWR measurements up to 9% higher.

Amplitude variation not to exceed 10% in a coiled vs uncoiled, a coil is defined as a 4% loop.

Mechanical Specifications

Cable Assembly

Weight	0.371 lbs [168.28 g]
--------	----------------------

Cable

Cable Type	PE-P141
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	2
Shield Layer 1	Silver Plated Copper Tape
Shield Layer 2	Silver Plated Copper Braid
Jacket Material	FEP, Blue
Jacket Diameter	0.163 in [4.14 mm]

Repeated Minimum Bend Radius	0.82 in [20.83 mm]
------------------------------	--------------------

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 120 Inch Length Using PE-P141 Coax with HeatShrink, LF Solder, RoHS PE350-120](#)



SMA Male to SMA Male Cable 120 Inch Length Using
PE-P141 Coax with HeatShrink, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE350-120

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SMA Male
Impedance	50 Ohms	50 Ohms
Body Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel
Hex Size	5/16 inch	5/16 inch
Torque	8 in-lbs [0.9 Nm]	8 in-lbs [0.9 Nm]

Environmental Specifications

Temperature

Operating Range

-55 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 120 Inch Length Using PE-P141 Coax with HeatShrink, LF Solder, RoHS PE350-120](#)




SMA Male to SMA Male Cable 120 Inch Length Using PE-P141 Coax with HeatShrink, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE350-120

How to Order

Part Number Configuration:

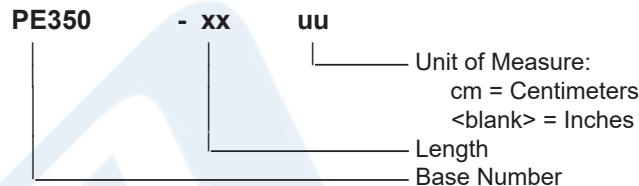

Example: PE350-12 = 12 inches long cable
PE350-100cm = 100 cm long cable

SMA Male to SMA Male Cable 120 Inch Length Using PE-P141 Coax with HeatShrink, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SMA Male Cable 120 Inch Length Using PE-P141 Coax with HeatShrink, LF Solder, RoHS PE350-120](https://www.pasternack.com/sma-male-sma-male-pe-p141-cable-assembly-pe350-120-p.aspx)

URL: <https://www.pasternack.com/sma-male-sma-male-pe-p141-cable-assembly-pe350-120-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE350-120 CAD Drawing
 SMA Male to SMA Male Cable 120 Inch Length Using PE-
 P141 Coax with HeatShrink, LF Solder, RoHS

REV. C						DESCRIPTION PCR PE350 20220613; EDITED NOTE 1, REMOVED 'ONE AT EACH END 6"...		DATE 06/21/2020		APPROVED SRAUTUS	
--------	--	--	--	--	--	---	--	-----------------	--	------------------	--

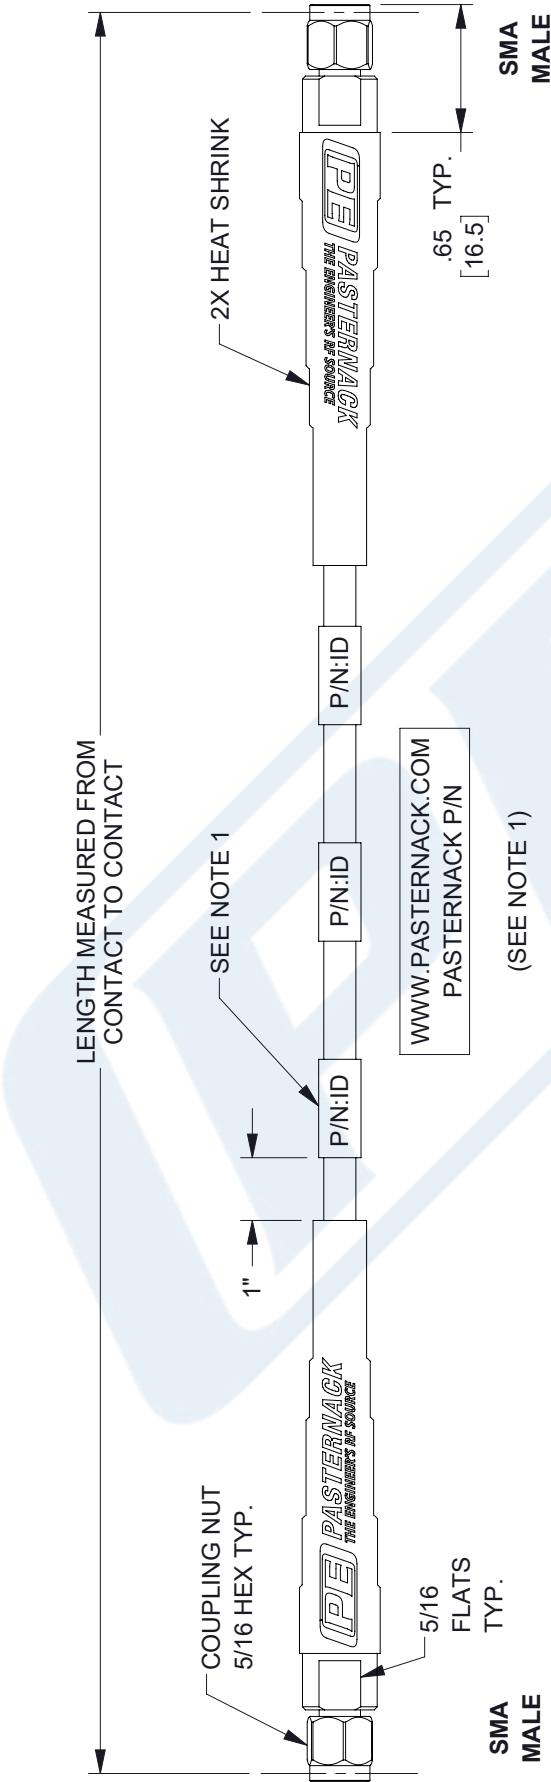

 PASTERNACK <i>an INFINITE brand</i>		THIRD ANGLE PROJECTION	
		THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNACK CORPORATION. ALL RIGHTS RESERVED.	
P/N:ID	P/N:ID	PASTERNACK Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com	SHEET 1 OF 1
SIZE A	CAGE CODE 53919	DRAWN BY DIMAY	ITEM NO. PE350 REV C

UNLESS OTHERWISE SPECIFIED
 LEADING DIMENSIONS ARE INCHES
 DIMENSIONS IN [] ARE MILLIMETERS
 TOLERANCES:

FRACTIONS:
 $X = \pm 2$ [5/08] $\pm 1/32$
 $.XX = \pm .02$ [.51] $\pm .005$ [.13] ANGLES $\pm 1^\circ$
 CABLE LENGTH (L) TOLERANCES:
 $L \leq 12$ [305] $\pm +1$ [-25] ± 0
 $12 [305] < L \leq 60 [1524] = \pm 2$ [51] ± 0
 $60 [1524] < L \leq 120 [3048] = +4$ [102] ± 0
 $120 [3048] < L \leq 300 [7620] = +6$ [152] ± 0
 $300 [7620] < L = +5$ [127] ± 0

ALL DIMENSIONS SHOWN
 ARE FOR REFERENCE ONLY.
 THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE
 WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.

NOTES:
 1. CABLES 48" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 48"
 HAVE 2 LABELS.

1. CABLES 48" AND UNDER HAVE 1 LABEL CENTERED. CABLES OVER 48"
 HAVE 2 LABELS.