

SMA Male Right Angle to SMA Female Bulkhead  
Semi-Flexible Precision Cable 6 Inch Length Using  
PE-SR405FLJ Coax, LF Solder, RoHS



RF Cable Assemblies Technical Data Sheet

PE39434-6

**Configuration**

- Connector 1: SMA Male Right Angle
- Connector 2: SMA Female Bulkhead
- Cable Type: PE-SR405FLJ

**Features**

- Max Frequency 10 GHz
- Shielding Effectivity > 100 dB
- 69.5% Phase Velocity
- FEP Jacket


**Applications**

- General Purpose
- Laboratory Use

**Description**

Pasternack's PE39434-6 SMA male right angle to SMA female bulkhead 6 inch cable using PE-SR405FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SMA cable assembly has a male to female gender configuration with 50 ohm formable PE-SR405FLJ coax. The PE39434-6 SMA male to SMA female cable assembly operates to 10 GHz. The right angle SMA interface on the PE-SR405FLJ cable allows for easier connections in tight spaces. Our RF cable assembly with SMA bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

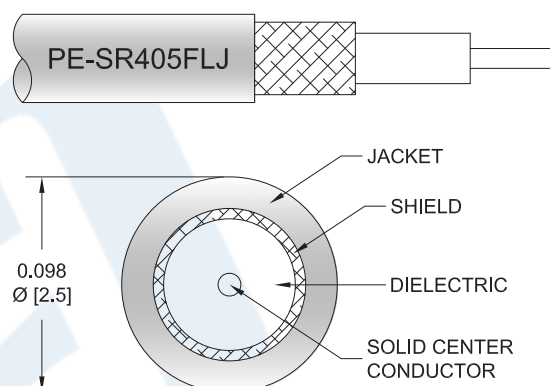

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FLJ Coax, LF Solder, RoHS PE39434-6](#)



SMA Male Right Angle to SMA Female Bulkhead  
Semi-Flexible Precision Cable 6 Inch Length Using  
PE-SR405FLJ Coax, LF Solder, RoHS

## RF Cable Assemblies Technical Data Sheet

PE39434-6

### Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		10	GHz
VSWR			1.35:1	
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		10.2 [33.46]		Ω/1000ft [Ω/Km]

### Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	10	GHz
Insertion Loss (Typ.)	0.269	0.298	0.347	0.43	0.539	dB

### Mechanical Specifications

#### Cable Assembly

Length*	6 in [152.4 mm]
Diameter	0.433 in [11 mm]
Weight	0.023 lbs [10.43 g]

#### Cable

Cable Type	PE-SR405FLJ
Impedance	50 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper Clad Steel, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Tinned Copper Braid
Jacket Material	FEP, Black
Jacket Diameter	0.098 in [2.49 mm]
One Time Minimum Bend Radius	0.236 in [5.99 mm]
Repeated Minimum Bend Radius	0.787 in [19.99 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FLJ Coax, LF Solder, RoHS PE39434-6](#)



SMA Male Right Angle to SMA Female Bulkhead  
Semi-Flexible Precision Cable 6 Inch Length Using  
PE-SR405FLJ Coax, LF Solder, RoHS

## RF Cable Assemblies Technical Data Sheet

PE39434-6

### Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	SMA Female Bulkhead
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	Beryllium Copper, Gold
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold
Coupling Nut Material and Plating	Passivated Stainless Steel	
Hex Size	5/16 in.	
Torque	8 in-lbs [0.9 Nm]	

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

- Values at 25°C, sea level.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FLJ Coax, LF Solder, RoHS PE39434-6](#)



SMA Male Right Angle to SMA Female Bulkhead  
Semi-Flexible Precision Cable 6 Inch Length Using  
PE-SR405FLJ Coax, LF Solder, RoHS

RF Cable Assemblies Technical Data Sheet

PE39434-6

**How to Order**

Part Number Configuration:

**PE39434**

**- xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: PE39434-12 = 12 inches long cable  
PE39434-100cm = 100 cm long cable

SMA Male Right Angle to SMA Female Bulkhead Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FLJ Coax, LF Solder, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to SMA Female Bulkhead Semi-Flexible Precision Cable 6 Inch Length Using PE-SR405FLJ Coax, LF Solder, RoHS PE39434-6](https://www.pasternack.com/sma-male-sma-female-pe-sr405flj-cable-assembly-pe39434-6-p.aspx)

URL: <https://www.pasternack.com/sma-male-sma-female-pe-sr405flj-cable-assembly-pe39434-6-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

# PE39434-6 CAD Drawing

SMA Male Right Angle to SMA Female Bulkhead Semi-Flexible Precision  
Cable 6 Inch Length Using PE-SR405FLJ Coax, LF Solder, RoHS

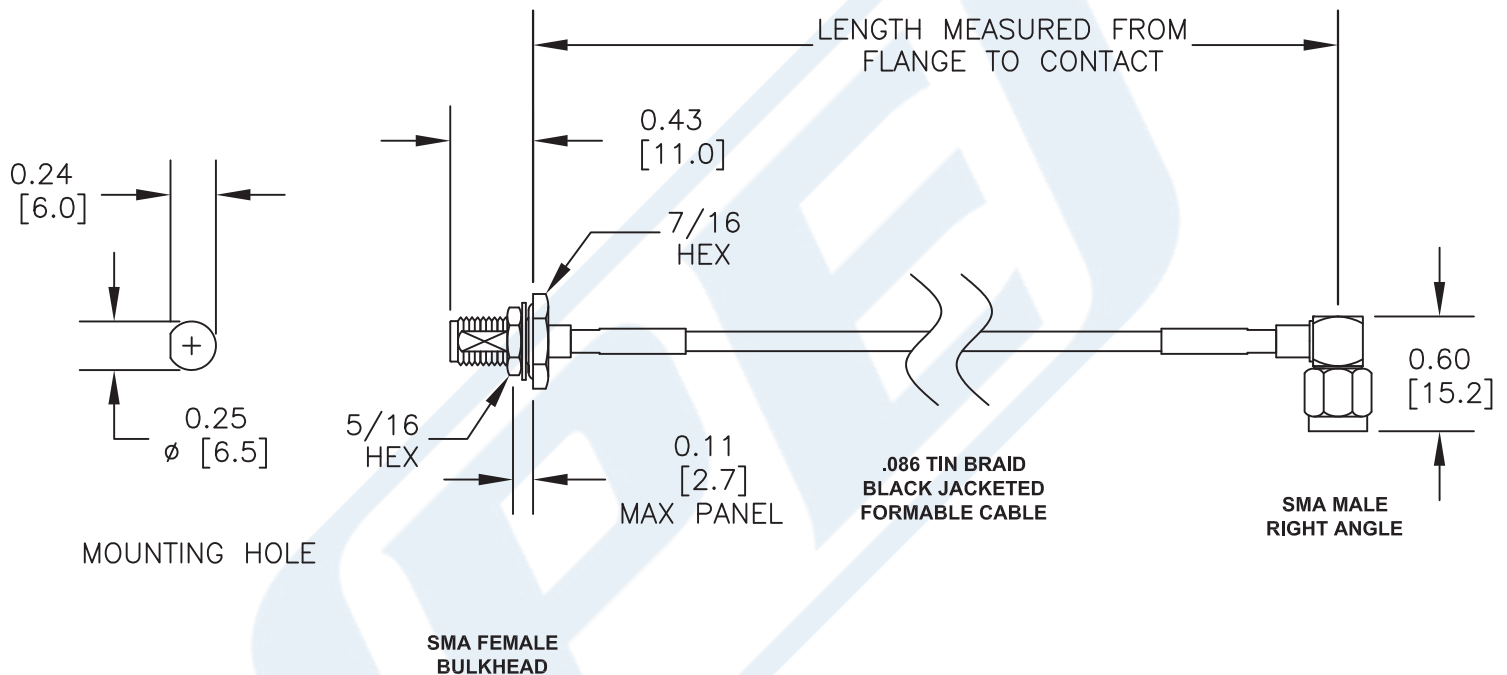

Note: This part is lead free.



Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623

Phone: (949) 261-1920 | Fax: (949) 261-7451

Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)

## NOTES:

1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.

DWG TITLE

PE39434

FSCM NO. 53919

CAD FILE

012015

SCALE N/A

SIZE A

2233