

SMA Male Right Angle to TNC Female Bulkhead
Cable 48 Inch Length Using PE-SR402AL Coax



RF Cable Assemblies Technical Data Sheet


PE3C2604-48

Configuration

- Connector 1: SMA Male Right Angle
- Connector 2: TNC Female Bulkhead
- Cable Type: PE-SR402AL

Features

- Max Frequency 1 GHz

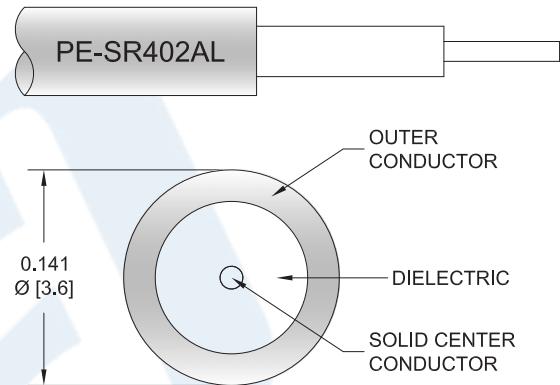

Applications

- General Purpose
- Laboratory Use

Description

Pasternack's PE3C2604-48 SMA male right angle to TNC female bulkhead 48 inch cable using PE-SR402AL coax is part of our full line of RF components available for same-day shipping. Pasternack's semi-rigid RF cable assemblies are ideal for high performance applications and can be formed, using proper tooling, to the routing pattern required. This Pasternack SMA to TNC cable assembly has a male to female gender configuration with 50 ohm semi-rigid PE-SR402AL coax. The PE3C2604-48 SMA male to TNC female cable assembly operates to 1 GHz. The right angle SMA interface on the PE-SR402AL cable allows for easier connections in tight spaces. Our RF cable assembly with TNC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to TNC Female Bulkhead Cable 48 Inch Length Using PE-SR402AL Coax PE3C2604-48](#)



SMA Male Right Angle to TNC Female Bulkhead Cable 48 Inch Length Using PE-SR402AL Coax

RF Cable Assemblies Technical Data Sheet

PE3C2604-48

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		1,000	MHz

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	50	100	250	500	1,000	MHz
Insertion Loss (Typ.)	0.36	0.38	0.45	0.57	0.81	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB for the straight connector and 0.2 dB for the right angle connector.

Mechanical Specifications

Cable Assembly

Length*

48 in [121.92 cm]

Cable

Cable Type

PE-SR402AL

Impedance

50 Ohms

Inner Conductor Type

Solid

Inner Conductor Material and Plating

Copper Clad Steel, Silver

Dielectric Type

PTFE

Number of Shields

1

Shield Layer 1

Tinned Aluminum

Jacket Diameter

0.141 in [3.58 mm]

One Time Minimum Bend Radius

0.1 in [2.54 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to TNC Female Bulkhead Cable 48 Inch Length Using PE-SR402AL Coax PE3C2604-48](#)

SMA Male Right Angle to TNC Female Bulkhead Cable 48 Inch Length Using PE-SR402AL Coax



RF Cable Assemblies Technical Data Sheet

PE3C2604-48

Connectors

Description	Connector 1	Connector 2
Type	SMA Male Right Angle	TNC Female Bulkhead
Specification	MIL-STD-348A	
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Brass, Gold	
Contact Plating Specification	50 μ in. minimum	
Dielectric Type	Teflon	
Body Material and Plating	Stainless Steel, Gold	Brass, Nickel
Body Plating Specification	30 μ in. minimum	
Coupling Nut Material and Plating	Brass, Nickel	
Coupling Nut Plating Specification	100 μ in. minimum	
Hex Size	5/16 in	
Torque	5 in-lbs [0.57 Nm]	

Environmental Specifications

Temperature

Operating Range

-55 to +125 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to TNC Female Bulkhead Cable 48 Inch Length Using PE-SR402AL Coax PE3C2604-48](#)

SMA Male Right Angle to TNC Female Bulkhead
Cable 48 Inch Length Using PE-SR402AL Coax



RF Cable Assemblies Technical Data Sheet

PE3C2604-48

How to Order

Part Number Configuration:

PE3C2604

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C2604-12 = 12 inches long cable
PE3C2604-100cm = 100 cm long cable

SMA Male Right Angle to TNC Female Bulkhead Cable 48 Inch Length Using PE-SR402AL Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male Right Angle to TNC Female Bulkhead Cable 48 Inch Length Using PE-SR402AL Coax PE3C2604-48](https://www.pasternack.com/sma-male-tnc-female-pe-sr402al-cable-assembly-pe3c2604-48-p.aspx)

URL: <https://www.pasternack.com/sma-male-tnc-female-pe-sr402al-cable-assembly-pe3c2604-48-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PE3C2604-48 CAD Drawing
SMA Male Right Angle to TNC Female Bulkhead Cable
48 Inch Length Using PE-SR402AL Coax

REVISIONS					
REV.	DESCRIPTION	DATE	APPROVED		
A	INITIAL RELEASE	3/11/2020	S.ELLIS		

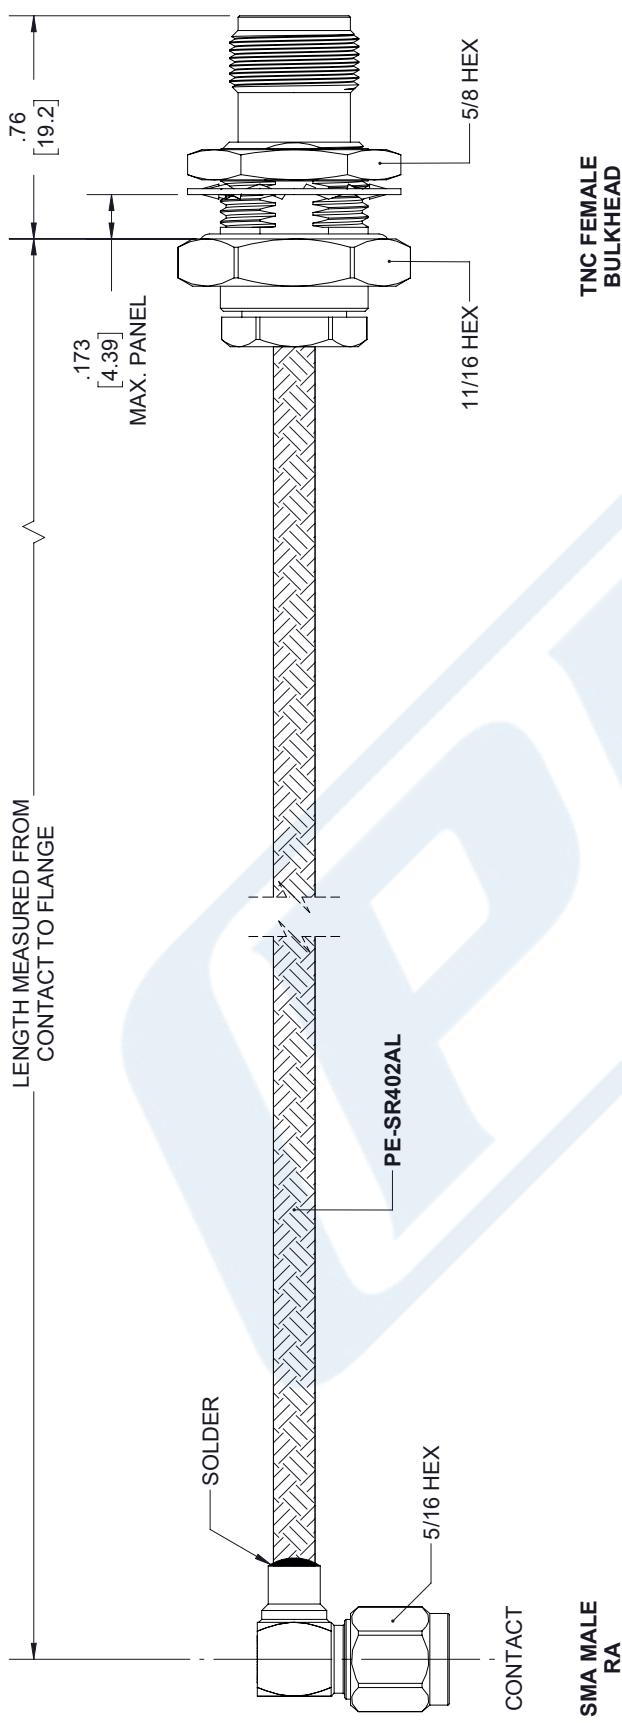

 PASTERNAK an INFINITE brand	THIRD-ANGLE PROJECTION	
	THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF PASTERNAK CORPORATION ALL RIGHTS RESERVED.	
Pasterнак Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasterнак.com E-mail: sales@pasterнак.com	OF SHEET 1 1	SCALE N/A
ITEM NO. PE3C2604	DRAWN BY K. DANG	REV A

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE
WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.