



SMA Male to SSMC Jack Bulkhead Cable Using PE-SR405FLJ Coax

RF Cable Assemblies Technical Data Sheet


PE3C4445

Configuration

- Connector 1: SMA Male
- Connector 2: SSMC Jack Bulkhead
- Cable Type: PE-SR405FLJ

Features

- Max Frequency 12.4 GHz
- Shielding Effectivity > 100 dB
- 69.5% Phase Velocity
- FEP Jacket
- SSMC Cable Assembly Max. Operating Frequency of 12.4 GHz
- Small SSMC cable connection form factor (50% smaller than SMA, radially)
- Reliable threaded coupling
- In stock and ready to ship

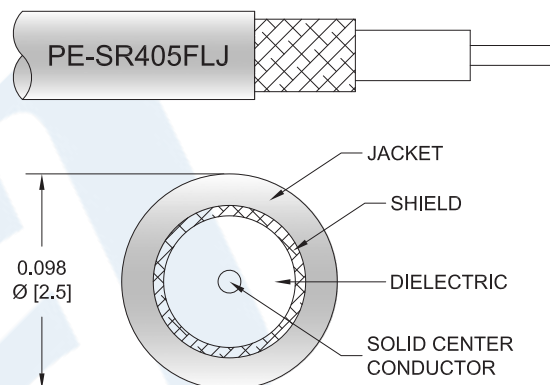

Applications

- General Purpose
- Laboratory Use
- SSMC Cable General Purpose Test
- Data Acquisition Systems
- A/D Conversion Systems
- Ultra Wideband Digital Receivers
- Software defined radio (SDR)

Description

Pasternack's PE3C4445 SMA male to SSMC jack bulkhead cable using PE-SR405FLJ coax is part of our full line of RF components available for same-day shipping. Pasternack's formable RF cable assemblies provide an alternative to costly pre-formed semi-rigid assemblies since they are hand formable. This Pasternack SMA to SSMC cable assembly has a male to jack gender configuration with 50 ohm formable PE-SR405FLJ coax. The PE3C4445 SMA male to SSMC jack cable assembly operates to 12.4 GHz. Our RF cable assembly with SSMC bulkhead interface allows designers to create external connections on their product enclosures, and can be used in a variety of other rack mount and panel mount applications.

Custom versions of most RF cable assemblies can be built and shipped same day. Custom cable assembly lengths can be obtained by specifying the desired length on the web site at time of order or by contacting a sales representative. Other available RF cable assembly value added services include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SSMC Jack Bulkhead Cable Using PE-SR405FLJ Coax PE3C4445](#)



SMA Male to SSMC Jack Bulkhead Cable Using PE-SR405FLJ Coax

RF Cable Assemblies Technical Data Sheet

PE3C4445

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12.4	GHz
VSWR			1.4:1	
Velocity of Propagation		69.5		%
RF Shielding	100			dB
Group Delay		1.43 [4.69]		ns/ft [ns/m]
Capacitance		29 [95.14]		pF/ft [pF/m]
DC Resistance Inner Conductor		65.7 [215.55]		Ω/1000ft [Ω/Km]
DC Resistance Outer Conductor		10.2 [33.46]		Ω/1000ft [Ω/Km]

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	5	10	12.4	GHz
Insertion Loss (Max.)	0.15	0.23	0.55	0.81	0.91	dB/ft
	0.49	0.75	1.8	2.66	2.99	dB/m

Electrical Specification Notes:

Insertion Loss does not include the loss of the connectors. Insertion Loss is estimated as 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Diameter 0.315 in [8 mm]

Cable

Cable Type PE-SR405FLJ
 Impedance 50 Ohms
 Inner Conductor Type Solid
 Inner Conductor Material and Plating Copper Clad Steel, Silver
 Dielectric Type PTFE
 Number of Shields 1
 Outer Conductor Material and Plating Tinned Copper Composite Braid
 Jacket Material FEP, Black
 Jacket Diameter 0.105 in [2.67 mm]

One Time Minimum Bend Radius 0.5 in [12.7 mm]
 Repeated Minimum Bend Radius 0.787 in [19.99 mm]

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SSMC Jack Bulkhead Cable Using PE-SR405FLJ Coax PE3C4445](#)



SMA Male to SSMC Jack Bulkhead Cable
Using PE-SR405FLJ Coax

RF Cable Assemblies Technical Data Sheet

PE3C4445

Connectors

Description	Connector 1	Connector 2
Type	SMA Male	SSMC Jack Bulkhead
Impedance	50 Ohms	50 Ohms
Mating Cycles		500
Contact Material and Plating	Brass, Gold over Nickel	Beryllium Copper, Gold
Contact Plating Specification		MIL-G-45204
Dielectric Type	PTFE	Teflon
Outer Conductor Material and Plating		Beryllium Copper, Gold
Outer Conductor Plating Specification		MIL-G-45204
Body Material and Plating	Brass, Gold over Nickel	Beryllium Copper, Gold
Body Plating Specification		MIL-G-45204
Coupling Nut Material and Plating	Passivated Stainless Steel	
Hex Size	5/16 inch	
Torque	8 in-lbs [0.9 Nm]	1.75 in-lbs [0.2 Nm]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SSMC Jack Bulkhead Cable Using PE-SR405FLJ Coax PE3C4445](#)



SMA Male to SSMC Jack Bulkhead Cable Using PE-SR405FLJ Coax

RF Cable Assemblies Technical Data Sheet

PE3C4445

How to Order

Part Number Configuration:

PE3C4445

- **xx**

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: PE3C4445-12 = 12 inches long cable
PE3C4445-100cm = 100 cm long cable

SMA Male to SSMC Jack Bulkhead Cable Using PE-SR405FLJ Coax from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [SMA Male to SSMC Jack Bulkhead Cable Using PE-SR405FLJ Coax PE3C4445](#)


URL: <https://www.pasternack.com/sma-male-ssmc-jack-pe-sr405flj-cable-assembly-pe3c4445-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.


PE3C4445 CAD Drawing

SMA Male to SSMC Jack Bulkhead Cable Using PE-SR405FLJ Coax

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
B	ADD HEATSHRINK	6/28/21	SRAUTUS

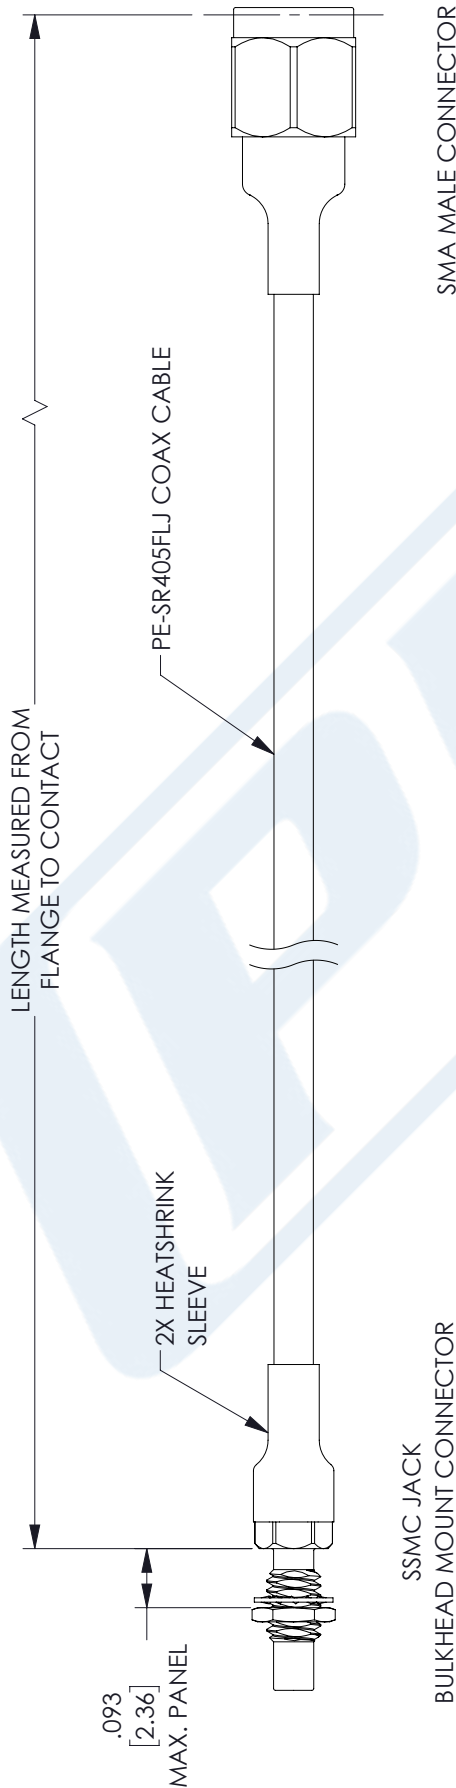

UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS TOLERANCES: <table border="0"> <tr> <td>.X = ± .2</td> <td>[5.08]</td> <td>FRACTIONS</td> </tr> <tr> <td>.XX = ± .01</td> <td>[.25]</td> <td>± 1/32</td> </tr> <tr> <td>.XXX = ± .005</td> <td>[.13]</td> <td>ANGLES ± 1°</td> </tr> </table> CABLE LENGTH (L) TOLERANCES: <table border="0"> <tr> <td>L ≤ 12 [305]</td> <td>± .1 [25] / -0</td> </tr> <tr> <td>12 [305] < L ≤ 60 [1524]</td> <td>± .2 [51] / -0</td> </tr> <tr> <td>60 [1524] < L ≤ 120 [3048]</td> <td>± .4 [102] / -0</td> </tr> <tr> <td>120 [3048] < L ≤ 300 [7620]</td> <td>± .6 [152] / -0</td> </tr> <tr> <td>300 [7620] < L</td> <td>± .5%L / -0</td> </tr> </table> ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.		.X = ± .2	[5.08]	FRACTIONS	.XX = ± .01	[.25]	± 1/32	.XXX = ± .005	[.13]	ANGLES ± 1°	L ≤ 12 [305]	± .1 [25] / -0	12 [305] < L ≤ 60 [1524]	± .2 [51] / -0	60 [1524] < L ≤ 120 [3048]	± .4 [102] / -0	120 [3048] < L ≤ 300 [7620]	± .6 [152] / -0	300 [7620] < L	± .5%L / -0	PE PASTERNAK an INFINITI® brand Pasternack Enterprises, Inc. P.O. Box 16759, Irvine, CA 92623. Phone: 1.949.261.1920 1.866.727.8376 Fax: 1.949.261.7451 Website: www.pasternack.com E-mail: sales@pasternack.com	
.X = ± .2	[5.08]	FRACTIONS																				
.XX = ± .01	[.25]	± 1/32																				
.XXX = ± .005	[.13]	ANGLES ± 1°																				
L ≤ 12 [305]	± .1 [25] / -0																					
12 [305] < L ≤ 60 [1524]	± .2 [51] / -0																					
60 [1524] < L ≤ 120 [3048]	± .4 [102] / -0																					
120 [3048] < L ≤ 300 [7620]	± .6 [152] / -0																					
300 [7620] < L	± .5%L / -0																					
SIZE	CAGE CODE	DRAWN BY	ITEM NO.																			
A	53919	DMAY	PE3C4445																			
REV			B																			



SHEET	1	OF	1
-------	---	----	---

SCALE	N/A
-------	-----

REV	B
-----	---

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.